



Туре	
Project	
Catalog No.	



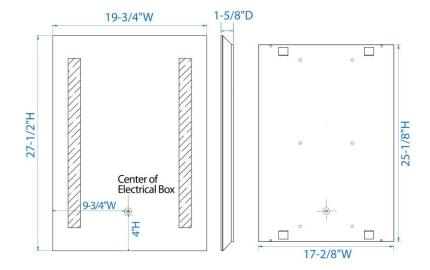

DESCRIPTION

Rectangular Fluorescent Back Lit Mirror With Two Vertical Cutouts. ADA Compliant.

Finish: Mirror surface with white metal sub-assembly.

Diffuser: Frosted Glass.

Construction: Steel, Glass and Aluminum. **Lamp:** (2) Fluorescent T5, 14W 3000K (Included)

Total Wattage: 28W

Dimensions: 27-1/2"H x 19-3/4"W x 1-5/8"D

Weight: 27 Pounds (12 kgs)

IP20 Rated.

MOUNTING:

Mounts over a standard J-box. Screws directly to drywall.

WIRING

Connections accomplished in existing J-Box.

BALLAST SPECIFICATIONS

Model: Fulham NPY-120-214-LT5

Input Voltage: 110 - 120V AC 50/60Hz
Maximum case temperature: 167°F (75°C)

• Starting type: Rapid start

Minimum starting temperature: 14°F (-10°C)
 Minimum operating temperature: 32°F (0°C)
 Transient protection: C42.41 Class A 7 strikes

Sound rating: "A"

End of life (EOL) Protection

Power Factor: >.5

Energy Star

Safety Listing: UL/CUL Class "P"

EMI: FCC Part 18-B

