


OUTDOOR • LED GARDEN & PATHWAY LIGHT SERIES HG-GBS4D

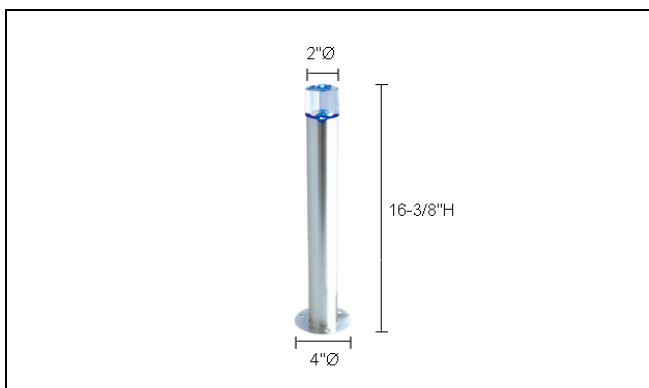

SPECIFICATIONS

Location Rating	Outdoor
Construction	Stainless Steel with Plastic Lens
Dimension	2" Ø x 16-3/8" x 4" Ø Base
Cut-Out	3-5/16" x 3-5/16"
LED Lamps Used	3 Lamps (0.06 W each)
Total Wattage	0.18 W
Operating Voltage	12V
Beam Angle	20°
Average Operating Life	30,000 hours – 30, 60, G, B 50,000 hours – R, Y
Weight	1.5 Lbs
Carton Size	4.5" x 4.5" x 20"

ORDERING INSTRUCTIONS

Example: MODEL – VOLTAGE – COLOR OUTPUT
HG-GBS4D – 12V – 30

DESCRIPTION

- Outdoor spike placement without the use of tools, for yard and garden, outlines driveways, pathways to pools and decks.
- Suitable for backyards in hotels, residences or apartments.
- Indoor/Outdoor screw-in mounting plate is ideal for creating pathway statements from entries to beautiful decorative forms on porches, steps and decks.

LISTING:

C-UL Listed.

INSTALLATION

Mounting plate has holes for direct screw-in to wooden porch or deck, or other type of flooring.

COLOR OUTPUT

R – Red	627nm = 26 lm/W
G – Green	530nm = 32 lm/W
B – Blue	470nm = 11 lm/W
Y – Yellow	590nm = 21 lm/W
30 – Warm White	3000K = 27 lm/W
60 – Cool White	6000K = 33 lm/W

ACCESSORIES

TRANSFORMERS


TRANS12W-OD	LED Driver 12W
TRANS36W-OD	LED Driver 36W
TRANS60W-OD	LED Driver 60W

HARNESSES

HARNESS2-OD	2-Light Harness
HARNESS3-OD	3-Light Harness
HARNESS5-OD	5-Light Harness
HARNESS7-OD	7-Light Harness

CONNECTING CABLES

CONNECT1-24-OD	24" Plug-in Connecting Cable
CONNECT1-36-OD	36" Plug-in Connecting Cable

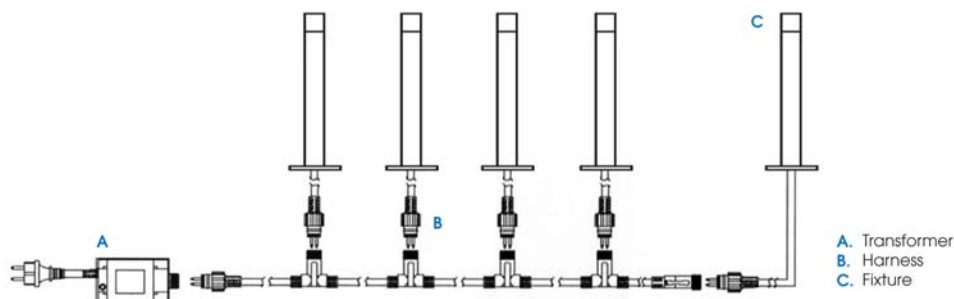

SUBMITTAL

Job Name:	Date:
Specification Type:	Job Location:
Drawing Location of Fixture Type:	Approval:
Specifier Name:	Sales Agency Contact:
Contact Phone/Email:	Contact Phone/Email:



JESCO
LIGHTING GROUP

JESCO LIGHTING GROUP
6625 TRAFFIC AVE
GLENDALE, NY 11385

800.527.7796
WWW.JESCOLIGHTING.COM
WWW.JESCOLED.COM

Specifications subject to
change without prior notice.


2/11/2010
Page 1 of 1

OUTDOOR • LED GARDEN & PATHWAY LIGHT SERIES HG-GBS4D


ACCESSORIES – HARNESES




HARNESS2-OD:
2-Light Harness
92" Plug-in lead 18AWG IP65 with waterproof connectors.
Fixture Spacing: 46"; Lead: 46"




HARNESS3-OD:
3-Light Harness
125" Plug-in lead 18AWG IP65 with waterproof connectors.
Fixture Spacing: 34"; Lead: 57"



HARNESS5-OD:
5-Light Harness
190" Plug-in lead 18AWG IP65 with waterproof connectors.
Fixture Spacing: 38"; Lead: 38"



HARNESS7-OD:
7-Light Harness
259" Plug-in lead 18AWG IP65 with waterproof connectors.
Fixture Spacing: 37"; Lead: 37"



ACCESSORIES – TRANSFORMERS



TRANS12W-OD:
12V Transformer with 72" power cord. Powers up to 12 watts.
Extension Lead: 33"



TRANS36W-OD:
12V Transformer with 72" power cord. Powers up to 36 watts.
Extension Lead: 33"



TRANS60W-OD:
12V Transformer with 72" power cord. Powers up to 60 watts.
Extension Lead: 33"



ACCESSORIES – CONNECTING CABLES



CONNECT2-24-OD
22" Plug-in Connecting Cable 18AWG IP65




CONNECT2-36-OD
33" Plug-in Connecting Cable 18AWG IP65



SUBMITTAL

Job Name:	Date:
Specification Type:	Job Location:
Drawing Location of Fixture Type:	Approval:
Specifier Name:	Sales Agency Contact:
Contact Phone/Email:	Contact Phone/Email:



JESCO
LIGHTING GROUP

JESCO LIGHTING GROUP
6625 TRAFFIC AVE
GLENDALE, NY 11385

800.527.7796
WWW.JESCOLIGHTING.COM
WWW.JESCOLED.COM

Specifications subject to
change without prior notice.

2/11/2010
Page 2 of 2