


OUTDOOR • LED IN-GROUND RECESSED ACCENT LIGHTING **HG-GL13S-12V**

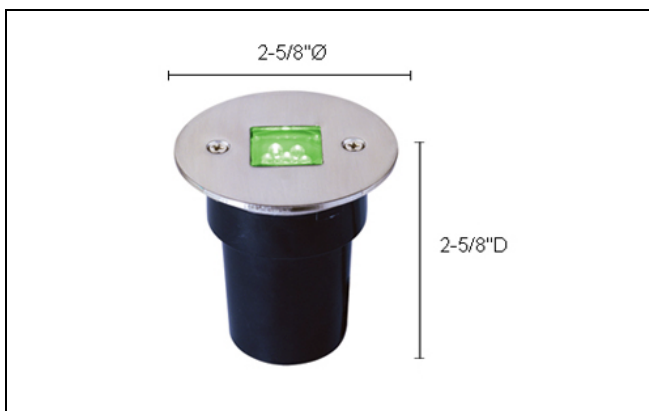

SPECIFICATIONS

Location Rating	Outdoor
Trim	Stainless Steel 2-5/8"Ø
Housing	ABS Plastic 2-5/8" D
Cut-Out	1-15/16"Ø
LED Lamps Used	6 Lamps (0.06 W each)
Total Wattage	0.36 W
Operating Voltage	12V DC
Light Output	33 lm/W
Beam Angle	20°
Average Operating Life	30,000 hours – 30, 60, G, B 50,000 hours – R, Y
Weight	0.75 Lbs
Carton Size	3" x 3" x 3"

ORDERING INSTRUCTIONS

Example: MODEL – VOLTAGE – COLOR OUTPUT
 HG-GL13S – 12V – 30

DESCRIPTION

- In-ground accents for garden lighting.
- In steps, porches and decks for accents.
- Pathway lighting along steps and driveways.
- Excellent for both decorative patterning and for night-time safety and security.

LISTING:
 C-UL Listed.

INSTALLATION

To install in wood or plastics: screw-in holes in housing provided.
 To install in cement, stone, brick, wood or plastics: use silicon glues on flange underside. Can be installed in-ground directly – just dig hole and fill around housing. Can be installed in: walls, fences, cabinetry, furnishings, ceilings, floors (only 1/8" thick trim thickness – route in wood if necessary 1/8").

COLOR OUTPUT

R – Red	627nm = 26 lm/W
G – Green	530nm = 32 lm/W
B – Blue	470nm = 11 lm/W
Y – Yellow	590nm = 21 lm/W
30 – Warm White	3000K = 27 lm/W
60 – Cool White	6000K = 33 lm/W

ACCESSORIES

TRANSFORMERS


TRANS12W-OD	LED Driver 12W
TRANS36W-OD	LED Driver 36W
TRANS60W-OD	LED Driver 60W

HARNESSES

HARNESS2-OD	2–Light Harness
HARNESS3-OD	3–Light Harness
HARNESS5-OD	5–Light Harness
HARNESS7-OD	7–Light Harness

CONNECTING CABLES

CONNECT1–24–OD	24" Plug-in Connecting Cable
CONNECT1–36–OD	36" Plug-in Connecting Cable

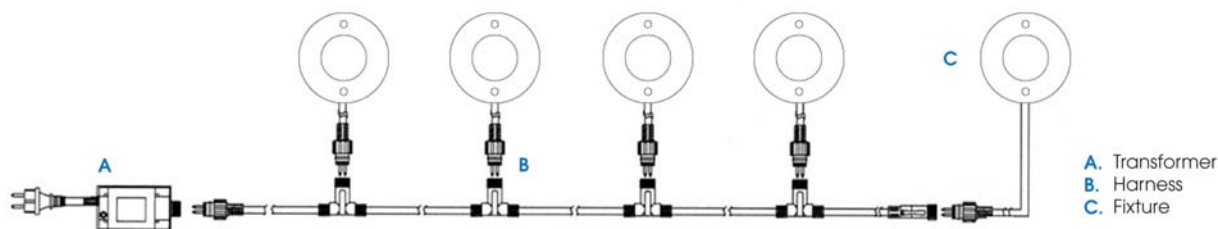

SUBMITTAL

Job Name:	Date:
Specification Type:	Job Location:
Drawing Location of Fixture Type:	Approval:
Specifier Name:	Sales Agency Contact:
Contact Phone/Email:	Contact Phone/Email:



JESCO
 LIGHTING GROUP

JESCO LIGHTING GROUP
 6625 TRAFFIC AVE
 GLENDALE, NY 11385

800.527.7796
WWW.JESCOLIGHTING.COM
WWW.JESCOLED.COM

Specifications subject to
 change without prior notice.


2/11/2010
 Page 1 of 1

OUTDOOR • LED IN-GROUND RECESSED ACCENT LIGHTING HG-GL13S-12V


ACCESSORIES – HARNESES




HARNESS2-OD:
2-Light Harness
92" Plug-in lead 18AWG IP65 with waterproof connectors.
Fixture Spacing: 46"; Lead: 46"




HARNESS3-OD:
3-Light Harness
125" Plug-in lead 18AWG IP65 with waterproof connectors.
Fixture Spacing: 34"; Lead: 57"



HARNESS5-OD:
5-Light Harness
190" Plug-in lead 18AWG IP65 with waterproof connectors.
Fixture Spacing: 38"; Lead: 38"



HARNESS7-OD:
7-Light Harness
259" Plug-in lead 18AWG IP65 with waterproof connectors.
Fixture Spacing: 37"; Lead: 37"



ACCESSORIES – TRANSFORMERS



TRANS12W-OD:
12V Transformer with 72" power cord. Powers up to 12 watts.
Extension Lead: 33"



TRANS36W-OD:
12V Transformer with 72" power cord. Powers up to 36 watts.
Extension Lead: 33"



TRANS60W-OD:
12V Transformer with 72" power cord. Powers up to 60 watts.
Extension Lead: 33"




ACCESSORIES – CONNECTING CABLES



CONNECT2-24-OD
22" Plug-in Connecting Cable 18AWG IP65




CONNECT2-36-OD
33" Plug-in Connecting Cable 18AWG IP65



SUBMITTAL

Job Name:	Date:
Specification Type:	Job Location:
Drawing Location of Fixture Type:	Approval:
Specifier Name:	Sales Agency Contact:
Contact Phone/Email:	Contact Phone/Email:



JESCO
LIGHTING GROUP

JESCO LIGHTING GROUP
6625 TRAFFIC AVE
GLENDALE, NY 11385

800.527.7796
WWW.JESCOLIGHTING.COM
WWW.JESCOLED.COM

Specifications subject to
change without prior notice.

2/11/2010
Page 2 of 2