


OUTDOOR • LED RECESSED AISLE, PATHWAY, STEP & WALL WASH SERIES HG-ST08L

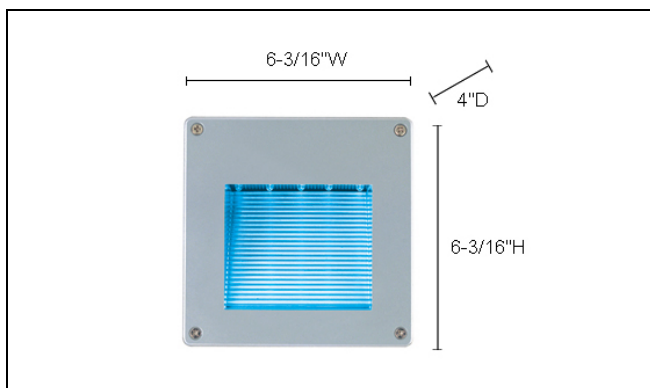

SPECIFICATIONS

| | |
|-------------------------------|--|
| Location Rating | Outdoor |
| Trim | Die-Cast 6-3/16" Square |
| Housing | Die-Cast 4" D |
| Cut-Out | 5-1/8"L x 5-1/8"W |
| LED Lamps Used | 15 Lamps (0.06 W each) |
| Total Wattage | 0.9 W |
| Operating Voltage | 12V DC |
| Beam Angle | 120° |
| Average Operating Life | 30,000 hours – 30, 60, G, B 50,000 hours – R, Y |
| Weight | 1.45 Lbs |
| Carton Size | 5" x 5" x 7" |

ORDERING INSTRUCTIONS

Example: MODEL – VOLTAGE – COLOR OUTPUT
HG-ST08L – 12V – 30

DESCRIPTION

- Integrates beautifully with modern architecture and interior design.
- For use in lighting porches and decks.
- Can be used for side outdoor lighting steps.
- Designed for use as a decorative pathway light in stores, restaurants, hotels, and apartment buildings.
- Used in movie theater and church aisle lighting.
- Excellent for use as a night light for safety and security.

LISTING:

C-UL Listed.

INSTALLATION

To install in wood or plastics, contractor can change faceplate screw lengths using faceplate corner holes. To install in cement, stone, brick, wood or plastics use silicon glues on flange underside.

Note: Can be installed in: walls, fences, cabinetry, furnishings, ceilings, floors. flange thickness is 1/2" – Cannot be used in floors that are walking areas.

COLOR OUTPUT

| | |
|-----------------|-----------------|
| R – Red | 627nm = 26 lm/W |
| G – Green | 530nm = 32 lm/W |
| B – Blue | 470nm = 11 lm/W |
| Y – Yellow | 590nm = 21 lm/W |
| 30 – Warm White | 3000K = 27 lm/W |
| 60 – Cool White | 6000K = 33 lm/W |

ACCESSORIES

TRANSFORMERS


| | |
|-------------|----------------|
| TRANS12W-OD | LED Driver 12W |
| TRANS36W-OD | LED Driver 36W |
| TRANS60W-OD | LED Driver 60W |

HARNESSES

| | |
|-------------|-----------------|
| HARNESS2-OD | 2-Light Harness |
| HARNESS3-OD | 3-Light Harness |
| HARNESS5-OD | 5-Light Harness |
| HARNESS7-OD | 7-Light Harness |


CONNECTING CABLES

| | |
|----------------|------------------------------|
| CONNECT1-24-OD | 24" Plug-in Connecting Cable |
| CONNECT1-36-OD | 36" Plug-in Connecting Cable |

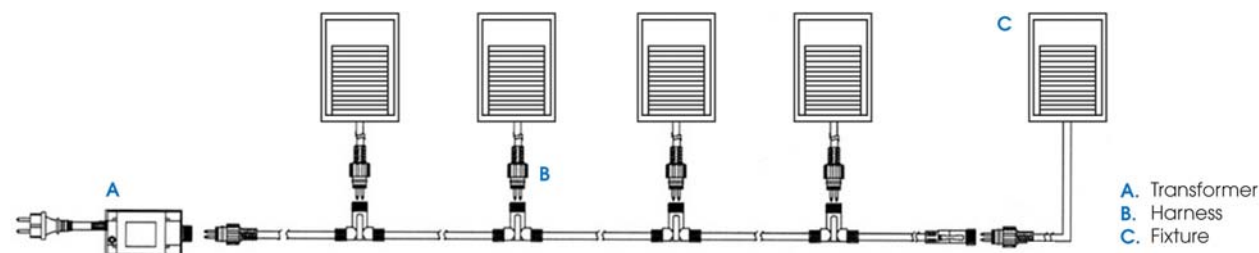

SUBMITTAL

| | |
|--|------------------------------|
| Job Name: | Date: |
| Specification Type: | Job Location: |
| Drawing Location of Fixture Type: | Approval: |
| Specifier Name: | Sales Agency Contact: |
| Contact Phone/Email: | Contact Phone/Email: |



JESCO
LIGHTING GROUP

JESCO LIGHTING GROUP
6625 TRAFFIC AVE
GLENDALE, NY 11385

800.527.7796
WWW.JESCOLIGHTING.COM
WWW.JESCOLED.COM

Specifications subject to
change without prior notice.


2/11/2010
Page 1 of 1

OUTDOOR • LED RECESSED AISLE, PATHWAY, STEP & WALL WASH SERIES HG-ST08L


ACCESSORIES – HARNESES




HARNESS2-OD:
2-Light Harness
92" Plug-in lead 18AWG IP65 with waterproof connectors.
Fixture Spacing: 46"; Lead: 46"




HARNESS3-OD:
3-Light Harness
125" Plug-in lead 18AWG IP65 with waterproof connectors.
Fixture Spacing: 34"; Lead: 57"



HARNESS5-OD:
5-Light Harness
190" Plug-in lead 18AWG IP65 with waterproof connectors.
Fixture Spacing: 38"; Lead: 38"



HARNESS7-OD:
7-Light Harness
259" Plug-in lead 18AWG IP65 with waterproof connectors.
Fixture Spacing: 37"; Lead: 37"



ACCESSORIES – TRANSFORMERS



TRANS12W-OD:
12V Transformer with 72" power cord. Powers up to 12 watts.
Extension Lead: 33"



TRANS36W-OD:
12V Transformer with 72" power cord. Powers up to 36 watts.
Extension Lead: 33"



TRANS60W-OD:
12V Transformer with 72" power cord. Powers up to 60 watts.
Extension Lead: 33"



ACCESSORIES – CONNECTING CABLES



CONNECT2-24-OD
22" Plug-in Connecting Cable 18AWG IP65




CONNECT2-36-OD
33" Plug-in Connecting Cable 18AWG IP65



SUBMITTAL

| | |
|-----------------------------------|-----------------------|
| Job Name: | Date: |
| Specification Type: | Job Location: |
| Drawing Location of Fixture Type: | Approval: |
| Specifier Name: | Sales Agency Contact: |
| Contact Phone/Email: | Contact Phone/Email: |



JESCO
LIGHTING GROUP

JESCO LIGHTING GROUP
6625 TRAFFIC AVE
GLENDALE, NY 11385

800.527.7796
WWW.JESCOLIGHTING.COM
WWW.JESCOLED.COM

Specifications subject to
change without prior notice.

2/11/2010
Page 2 of 2