


# **OUTDOOR • LED RECESSED AISLE, PATHWAY, STEP & WALL WASH SERIES** **HG-ST08M**

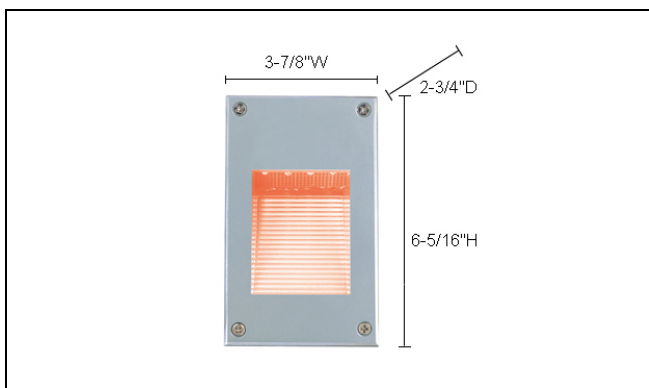

## **SPECIFICATIONS**

<b>Location Rating</b>	Outdoor
<b>Trim</b>	Die-Cast 6-5/16" x 3-7/8"
<b>Housing</b>	Die-Cast 2-3/4" D
<b>LED Lamps Used</b>	12 Lamps (0.06 W each)
<b>Cut-Out</b>	6"L x 3-5/8"W
<b>Total Wattage</b>	0.72 W
<b>Operating Voltage</b>	12V DC
<b>Beam Angle</b>	120°
<b>Average Operating Life</b>	30,000 hours – 30, 60, G, B 50,000 hours – R, Y
<b>Weight</b>	1.2 Lbs
<b>Carton Size</b>	7" x 4-1/4" x 3"

## **ORDERING INSTRUCTIONS**

**Example:** MODEL – VOLTAGE – COLOR OUTPUT  
 HG-ST08M – 12V – 30

## **DESCRIPTION**

- Integrates beautifully with modern architecture and interior design.
- For use in lighting porches and decks.
- Can be used for side outdoor lighting steps.
- Designed for use as a decorative pathway light in stores, restaurants, hotels, and apartment buildings.
- Used in movie theater and church aisle lighting.
- Excellent for use as a night light for safety and security.

## **LISTING:**

C-UL Listed.

## **INSTALLATION**

To Install in wood or plastics, contractor can change faceplate screw lengths using faceplate corner holes. To install in cement, stone, Brick, wood or plastics use silicon glues on flange underside.

Note: can be installed in: walls, fences, cabinetry, furnishings, ceilings, floors. flange thickness is 1/2" – cannot be used in floors that are walking areas.

## **COLOR OUTPUT**

R – Red	627nm = 26 lm/W
G – Green	530nm = 32 lm/W
B – Blue	470nm = 11 lm/W
Y – Yellow	590nm = 21 lm/W
30 – Warm White	3000K = 27 lm/W
60 – Cool White	6000K = 33 lm/W

## **ACCESSORIES**

### **TRANSFORMERS**


TRANS12W-OD	LED Driver 12W
TRANS36W-OD	LED Driver 36W
TRANS60W-OD	LED Driver 60W

### **HARNESSES**

HARNESS2-OD	2–Light Harness
HARNESS3-OD	3–Light Harness
HARNESS5-OD	5–Light Harness
HARNESS7-OD	7–Light Harness


### **CONNECTING CABLES**

CONNECT1–24–OD	24" Plug-in Connecting Cable
CONNECT1–36–OD	36" Plug-in Connecting Cable

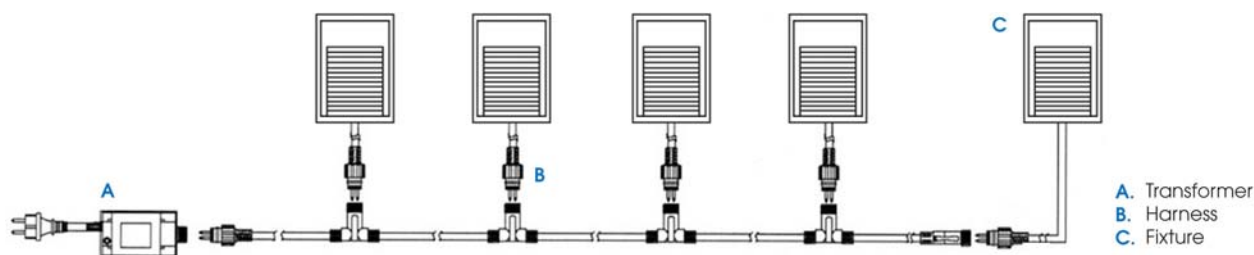

## **SUBMITTAL**

<b>Job Name:</b>	<b>Date:</b>
<b>Specification Type:</b>	<b>Job Location:</b>
<b>Drawing Location of Fixture Type:</b>	<b>Approval:</b>
<b>Specifier Name:</b>	<b>Sales Agency Contact:</b>
<b>Contact Phone/Email:</b>	<b>Contact Phone/Email:</b>



**JESCO**  
 LIGHTING GROUP

**JESCO LIGHTING GROUP**  
 6625 TRAFFIC AVE  
 GLENDALE, NY 11385

800.527.7796  
 WWW.JESCOLIGHTING.COM  
 WWW.JESCOLED.COM

Specifications subject to  
 change without prior notice.

2/11/2010  
 Page 1 of 1

# OUTDOOR • LED RECESSED AISLE, PATHWAY, STEP & WALL WASH SERIES HG-ST08M


## ACCESSORIES – HARNESES




**HARNESS2-OD:**  
2-Light Harness  
92" Plug-in lead 18AWG IP65 with waterproof connectors.  
Fixture Spacing: 46"; Lead: 46"




**HARNESS3-OD:**  
3-Light Harness  
125" Plug-in lead 18AWG IP65 with waterproof connectors.  
Fixture Spacing: 34"; Lead: 57"



**HARNESS5-OD:**  
5-Light Harness  
190" Plug-in lead 18AWG IP65 with waterproof connectors.  
Fixture Spacing: 38"; Lead: 38"



**HARNESS7-OD:**  
7-Light Harness  
259" Plug-in lead 18AWG IP65 with waterproof connectors.  
Fixture Spacing: 37"; Lead: 37"



## ACCESSORIES – TRANSFORMERS



**TRANS12W-OD:**  
12V Transformer with 72" power cord. Powers up to 12 watts.  
Extension Lead: 33"



**TRANS36W-OD:**  
12V Transformer with 72" power cord. Powers up to 36 watts.  
Extension Lead: 33"



**TRANS60W-OD:**  
12V Transformer with 72" power cord. Powers up to 60 watts.  
Extension Lead: 33"




## ACCESSORIES – CONNECTING CABLES



**CONNECT2-24-OD**  
22" Plug-in Connecting Cable 18AWG IP65




**CONNECT2-36-OD**  
33" Plug-in Connecting Cable 18AWG IP65



## SUBMITTAL

Job Name:	Date:
Specification Type:	Job Location:
Drawing Location of Fixture Type:	Approval:
Specifier Name:	Sales Agency Contact:
Contact Phone/Email:	Contact Phone/Email:



**JESCO**  
LIGHTING GROUP

**JESCO LIGHTING GROUP**  
6625 TRAFFIC AVE  
GLENDALE, NY 11385

800.527.7796  
[WWW.JESCOLIGHTING.COM](http://WWW.JESCOLIGHTING.COM)  
[WWW.JESCOLED.COM](http://WWW.JESCOLED.COM)

Specifications subject to  
change without prior notice.

2/11/2010  
Page 2 of 2