

RLF-4115

4" LED DOWNLIGHT
RECESSED DOWNLIGHT



Fixture Type
Project
Notes



RLF-4115 with RLT-4101-WH



RLF-4115 with RLT-4106-WH



RLF-4115-SW5-WH complete set

LED Downlights series is designed for residential and commercial spaces. With a selection of Round and Square Trim in Black or White options, an ultra shallow profile of merely 1-7/8" deep coupled with IC rating, this Slim Downlight is perfect for tight spaces such as soffits, insulated and suspended ceilings as well as installations directly below ceiling joists. Fixture installs flush to ceiling. No housing is required for remodel applications, and they include mounting frame with hanger bars optional for New Construction applications. Trim is sold separately and remote driver is included.



SPECIFICATIONS

INPUT VOLTAGE	120V AC
WATTAGE	15 W
LUMENS	1000 Lm
EFFICACY	67 Lm/W
CRI	90+
BEAM ANGLE	38°
DIMMING ¹	TRIAC
CUT-OUT	3-3/4" Ø

RATINGS	IC, Airtight
ENVIRONMENT	Indoor - Wet
CERTIFICATIONS	cETLus, T24 Compliant
LUMEN MAINTENANCE	50,000 hours
INCLUDES	Remote driver
REQUIRE	Round or square trims
OPTIONAL	RLH-23354-NC-UNI Universal mounting plate
WARRANTY ²	5 years

¹ Effectively dim down to 10%

² See published warranty terms for detailed information


PERFORMANCE

CCT selectable via switch on heatsink

COLOR TEMPERATURE ³	LUMEN ⁴	WATTAGE	EFFICACY	CRI
SW5 (27/30/35/40/50K) ⁵	1000 Lm	15 W	67 Lm/W	90+

^{3,4} CCT within +/-10%

⁵ Switchable CCT

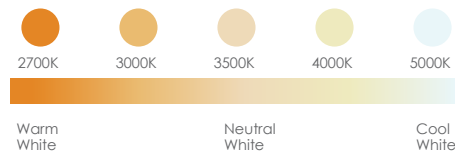

ORDERING INFO


STEP 1 - Light Engine with LED



MODEL	RLF-4115	-	CCT / CRI	SW5
			SW5 - Switchable CCT (27/30/35/40/50) / 90 CRI	

OPTIONAL ACCESSORY

(Sold separately)



MODEL	RLH-23354-NC-UNI
Universal mounting plate with hanger bars.	
For cutout sizes 2-1/8", 2-7/8", 3-3/4" or 5-1/4"	

STEP 2 - Trim (Sold separately)



RLT-4101-BK



RLT-4101-WH



RLT-4106-BK



RLT-4106-WH

MODEL	FINISH
RLF-4101 - Round Trim	BK - Black
RLF-4106 - Square Trim	WH - White

NY 15 Harbor Park Drive
Port Washington, NY 11050

Main Fax 800 527 7796
855 265 5768

CA 219 South 6th Ave
City of Industry, CA 91746

Main Fax 800 527 7796
855 265 5768

support@jescolighting.com
Tech Support 855 592 0029



RLF-4115

4" LED DOWNLIGHT
RECESSED DOWNLIGHT




Fixture Type
Project
Notes

TECHNICAL DRAWING

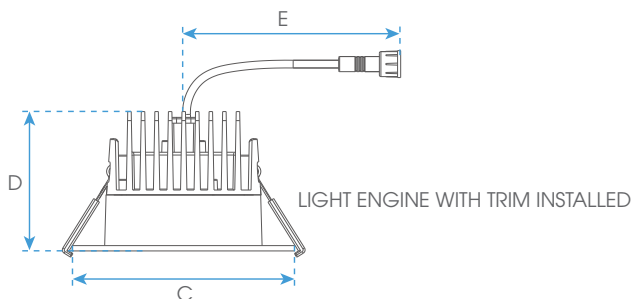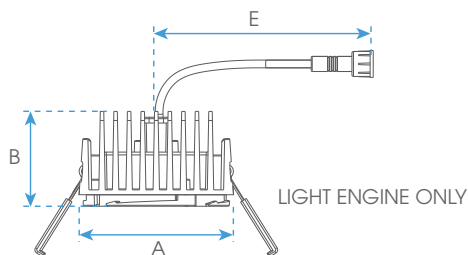

DIMENSIONS		
A	3-1/8"	80 mm
B	1-7/8"	49 mm
C	4-1/2"	115 mm
D	3"	75 mm
E	7-1/2"	190 mm

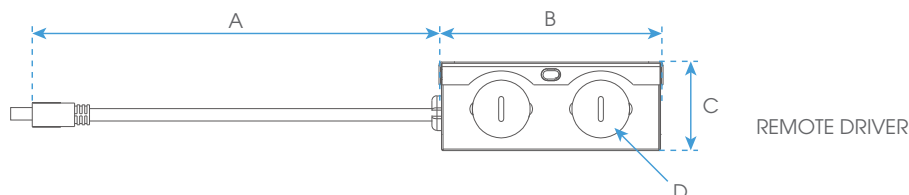


DIMENSIONS		
A	7-1/2"	190 mm
B	3-7/8"	80 mm
C	1-1/2"	39 mm
D	1/2" Knockout	


TRIMMED OPTIONS



PART NUMBER	RLT-4101
DESCRIPTION	Round Trim in BK - Black and WH - White
ENVIROMENT	Indoor, Wet
DIMENSIONS	A: 3" (76 mm) x B: 4-1/2" (115 mm) x C: 1-1/8" (29 mm)

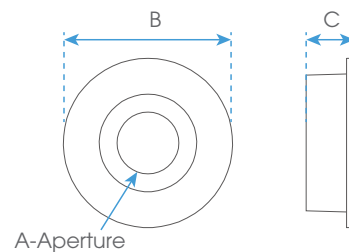

PART NUMBER	RLT-4106
DESCRIPTION	Square Trim in BK - Black and WH - White
ENVIROMENT	Indoor, Wet
DIMENSIONS	A: 3" (76 mm) x B: 4-1/2" (115 mm) x C: 1-1/8" (29 mm)

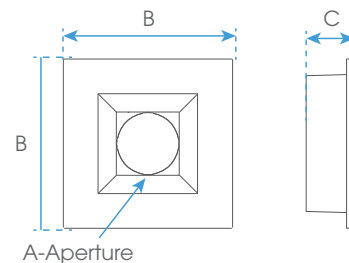

COMPATIBLE DIMMERS

COOPER	SI06P
LEVITON	6621, 6672, IPL06-10Z
LUTRON	PD-6WCL, DVCL-153P, SFTU-5A3P, DMD-LE3-D, CTCL-153P, DV-600P