## RATIO PD31408

## **PENDANTS**



## DESCRIPTION

**PROJECT** 


An opal plane of diffusive light is suspended and supported by a machined rectilinear frame, emitting luminance upwards and downwards. The visual balance between solid perimeter and open space is derived from the golden ratio for which the product is named. Available in either vertical or horizontal orientation and a selection of finishes.




## **SPECIFICATION DETAILS**

 $\ensuremath{^{\star}}$  For custom options, consult factory for details.

<b>Fixture Dimensions</b>	L8-1/4" x W1/2" x H5-1/8"
Light Source	LED with DC Driver
Wattage	11W
Total Lumens	945lm
Delivered Lumens	BB-603lm; WH-712lm;
Voltage	120V
Color Temperature	3000K
CRI (Ra)	90CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	100% - 10%, TRIAC or ELV Dimmer (Not Included)
Diffuser Details	Frosted acrylic diffuser
Adjustable	Yes
Wire Length	120" Max
Wire Type	Clear SSL Wire
Location	Dry
Warranty	5 Years
Illumination Direction	Up and Down
CEC Title 24 JA8	Yes, JA8-19
Canopy Dimensions	L5"x W5" x H1-1/4"

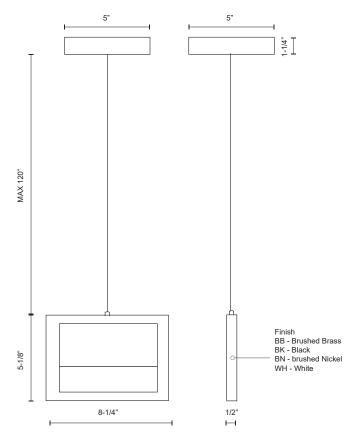



19054 28TH AVENUE SURREY - BC V3Z 6M3 CANADA COMMENT



