
TR26352RLA

Style meets safety in radiant® Spec Grade Tamper-Resistant Receptacles.

TR26352R

Part of the radiant® collection of wiring devices, screwless wall plates, and home automation controls, these receptacles feature a corrosion-resistant plated-steel mounting strap, durable nylon face, and triple-wipe power contacts combined with tamper-resistant shutters to deliver safe and reliable performance. Ergonomic radiant styling offers a sleek design, while giving the same performance and ease of installation as standard Pass & Seymour devices. Tamper-resistant feature helps you comply with 2014 NEC® Article 406.12 and gets the job done right. Screw-pressure-plate back wiring ensures easy installation and excellent electrical connections. These UL-Listed receptacles are ideal for residential, multi-dwelling, commercial office, and hospitality applications.

Features & Benefits


Dual mechanical shutter system – now with black "invisi-shutters" – to help prevent insertion of foreign objects.

Impact-resistant nylon face for durability.

Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.

Backed-out tri-drive steel terminal screws for faster installation.

Part of the radiant® collection.

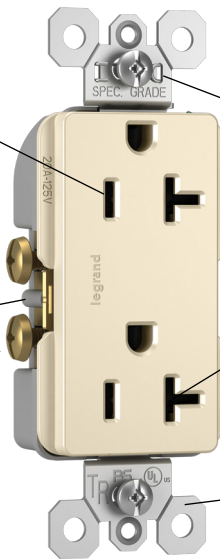
TR26352RLA

Auto-ground clip assures positive ground.

.032-inch thick brass triple-wipe power contacts for reliable plug retention.

Corrosion-resistant, plated steel strap.

3rd Party Compliance



UL Listed, File Number E140596, Standard UL498,
 CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, Conforms to NEMA WD-1 and WD-6

Technical Information

Performance

Electrical

Dielectric Withstand Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Environmental


Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Mechanical

Terminal Identification	Terminal Identification in accordance with UL 498 (Brass, White, Green)
Terminal Accommodation	#14 AWG - #10 AWG copper conductor only
Product Identification	Ratings are permanent part of the device

Materials

Face	Nylon
BackBody	Nylon
Line Contacts	.032 260 Brass
Mounting Strap	.042 Zinc-Plated Steel
Ground Contacts	.040 260 Brass
Pressure Plate	.080 Steel
Tamper-Resistant Shutters	Thermoplastic
Terminal Screws	#8 Tri-Drive Steel (Neutral = Nickel-Plated Steel)
Ground Screw	#8 Hex Tri-Drive Steel; Zinc Coating with Green Chromate
Auto-Ground Clip	Steel
Mounting Screws	Tri-Drive Steel

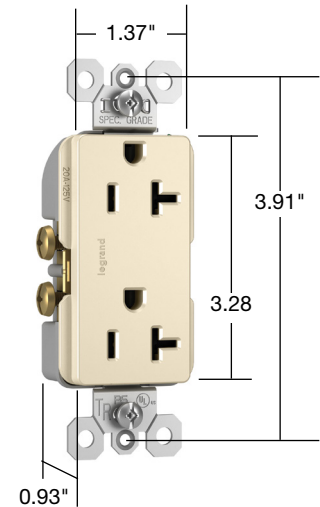

TR26352RLA


Warranty

1 Year

Ordering Information

radiant® Spec Grade Receptacles Back & Side Wire

Catalog Number	Rating		Color	NEMA Configuration No.
	A	V		
TR26352RI	20A	125V	Ivory	5-20R
TR26352RW	20A	125V	White	5-20R
TR26352R	20A	125V	Brown	5-20R
TR26352RGRY	20A	125V	Gray	5-20R
TR26352RBK	20A	125V	Black	5-20R
TR26352RLA	20A	125V	Light Almond	5-20R
TR26352RNI	20A	125V	Nickel	5-20R
TR26352RDB	20A	125V	Dark Bronze	5-20R
TR26352RRG	20A	125V	Graphite	5-20R




NEMA
5-20R

Field Uses/Vertical Markets

- Residential
- Hospitality/Lodging
- Retail
- Multiple Dwelling
- Office
- Education

Also available in the radiant® collection...

- GFCI Receptacles
- Tamper-Resistant and Standard Duplex Receptacles
- Paddle Switches
- Fan Controls
- Sensors
- Timers
- Home Automation Controls
- USB Charging Devices
- Night Lights
- Screwless Wall Plates

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
1.877.BY.LEGRAND (295.3472)
www.legrand.us

570 Applewood Crescent
Vaughan, Ontario L4K 4B4
905.738.9195
www.legrand.ca

FOLLOW US

