

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in offices and all rooms in the house.

CONSTRUCTION

Sleek linear design with accenting white faux marble center strip and brushed nickel finials at each end. Durable, milk white acrylic diffuser provides wide spread, uniform illumination. Finials provide easy access for cleaning and maintenance. Available in three sizes: 1'x2', 1'x4' or 1-1/2'x4'.

OPTICS

Utilizes linear T8 fluorescent lamps for energy efficiency, superior color rendering and long life (not included).

ELECTRICAL

Standard with 120 volt, 60Hz electronic ballast ensures no flickering and quiet operation without interfering with other electronics. Also available in other ballast configurations.

For use with non-dimmable switches only.

LISTING

UL listed (standard) suitable for damp locations and ENERGY STAR® qualified. For non-RE ballast fixtures, UL (standard) and for CSA certified (see options).

WARRANTY

2-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

Catalog Number
Notes
Type

Indoor Decorative

VELEGANT


LINEAR FLUSH MOUNT

Linear T8 Fluorescent



DIMENSIONS

Nominal Size	Lamp Configuration	Model Number	Number of Lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Extension* inches (cm)
1' x 2'		11692	(2) 17W linear T8	12" (30.5)	31-3/4" (80.6)	3-3/8" (8.6)
1' x 4'		11690	(2) 32W linear T8	12" (30.5)	55-3/4" (141.6)	3-3/8" (8.6)
1-1/2' x 4'		11694	(4) 32W linear T8	15-1/4" (38.7)	57-1/2" (146.0)	3-7/8" (9.8)

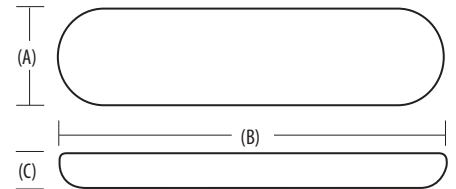

* Extension from ceiling

All dimensions are in inches (centimeters)

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: 11690RE

Series ^{1,2}	Residential ballast ³	Lamp ⁴	Ballast/Voltage ⁴	Options
White diffuser	RE 120 volt residential electronic ballast (standard)	(blank) RE ballast fixtures only	(blank) RE ballast fixtures only	GEB Electronic ballast, <20%THD
11692 1'x2' - (2) 17W linear T8 fluorescent lamps	(blank) Other voltage and ballast types available (see ballast/voltage)	Non-RE ballast fixtures only	MVOLT Multi-volt	GEB10IS T8 electronic ballast, <10% THD, instant start
11690 1'x4' - (2) 32W linear T8 fluorescent lamps		17 17W T8 (2' fixtures only)	120 120 Volt	GEB10RS T8 electronic ballast, 10% THD, rapid start
11694 1-1/2'x4' - (4) 32W linear T8 fluorescent lamps		32 32W T8 (4' fixtures only)	277 277 Volt	CSA CSA Certified
			347 347 Volt	(Consult factory for other options)

Replacement Parts: Order as separate catalog number.	
D2VEL	1' x 2' white acrylic diffuser
DVEL	1' x 4' white acrylic diffuser
D15VEL	1-1/2' x 4' white acrylic diffuser

Notes

- Lamps not included.
- Use with non-dimmable switches only.
- Residential electronic ballast standard and requires RE designation.
- No designation for lamp type is required on RE ballast fixtures.
- No designation for ballast/voltage type is required on RE ballast fixtures.

Velegant Linear Flush Mount

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.