

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 4530

For Wall Mount Fixture

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
ATTENTION! COUPER LE COURANT AU FUSIBLE OU LE DISJONCTEUR .**

MOUNTING THE FIXTURE

Installation (see fig.1)

1. Shut off the power at the circuit breaker and remove old fixture, including the cross bar.
2. Attach the mounting screw part way into the side hole of the crook cross bar, then lock it securely with hex nut until becoming.
3. Attach the cross bar to the junction box using two box screws. The side of the cross bar marked "GND" must face out.
4. Follow wiring instructions carefully (see fig.2)
5. Attach the lamp body(C) onto the junction box, aligning screws on cross bar with mounting holes and lock it securely with the ball nuts(D).
6. Attach the short sleeve (B) onto the lamp holder, attach the candela sleeve(A) insert the short sleeve(B).
7. Install the light bulbs in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

Wiring (see fig.2)

1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the mounting plate.
2. Tuck the wire connections neatly into the wall junction box.

Fig.1

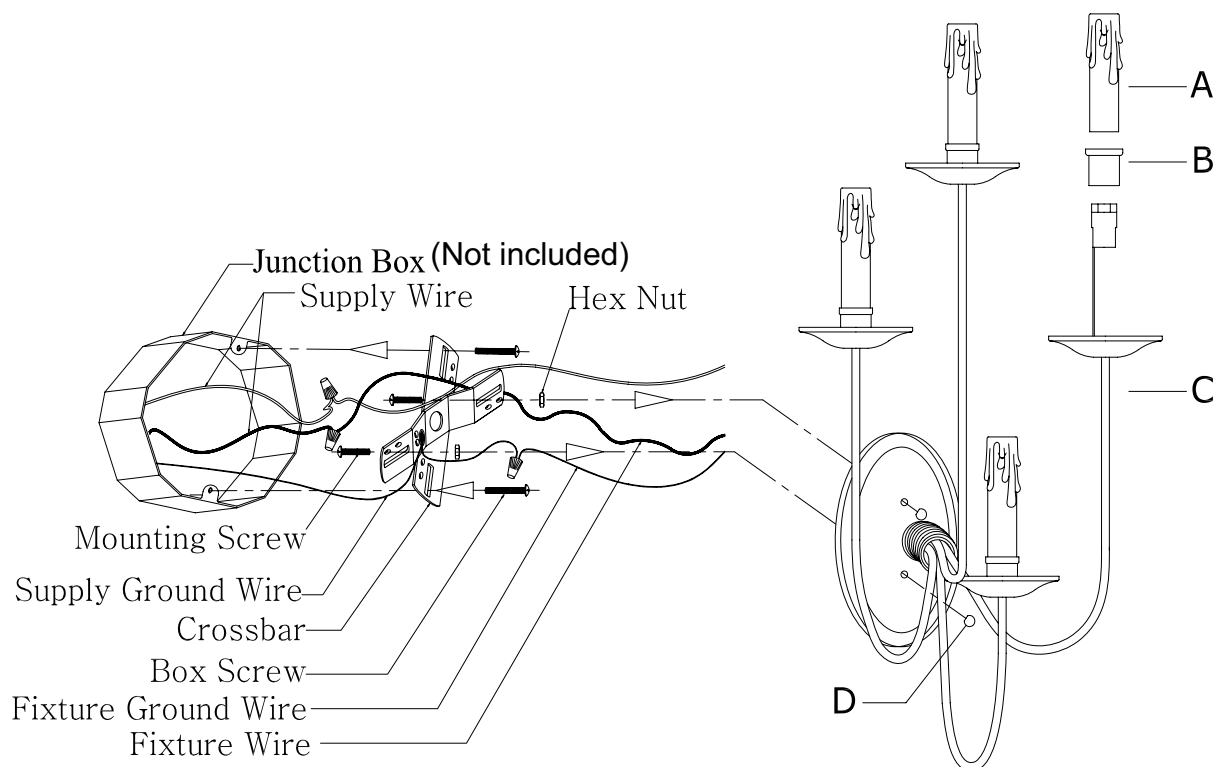





Fig.2

<p>FIXTURE WIRES</p> <p>Black or Smooth</p>		<p>FIXTURE WIRES</p> <p>White or Ribbed</p>		<p>FIXTURE WIRES</p> <p>Bare Copper (Ground)</p>	
<p>HOUSE WIRES</p> <p>Black (Hot)</p>		<p>HOUSE WIRES</p> <p>White (Neutral)</p>		<p>HOUSE WIRES</p> <p>Green or Bare Copper (Ground)</p>	



DOC20141204530