



Dagny LK

Designed in 2013



shown in Textured Bronze
with metal blades and
decorative guard

With clean, fluid lines, the Dagny LK 360° rotational fan is a striking centerpiece in any space. Its movement about its cylindrical center housing is smooth and quiet. Dagny LK's dual fan heads can be infinitely positioned in 180-degree arcs for optimum and customized air movement. As the angle between the fan heads and the horizontal support rods is increased, so does the speed of Dagny LK's axial rotation. Matthews rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed from cast aluminum and heavy stamped steel, the Dagny LK carries a limited lifetime warranty. This model is also available without a light kit as the Dagny.



shown in Brushed Nickel
with metal blades




shown in Brushed Nickel
with wood blades

| SKU NAMING CONVENTION | |
|-----------------------|---|
| SKU# | DGLK-XX-XXX (Model+Finish+Blade Type) |
| Finishes | Brushed Nickel - BN Textured Bronze - TB |
| Blade Type | Solid Wood - WD Metal w/ Decorative Cage - MTL Metal w/ Safety Cage - MSAF |

Dagny LK

TECHNICAL SPECIFICATIONS

| STANDARD EQUIPMENT | |
|--|---|
| One downrod of 10 inches / 13 cm | |
| Vaulted ceiling canopy for up to 29° | |
| 3-speed RF remote control in black | ACCESSORY |
|  | Decora-style, 3-speed, non-dimmable wall control  |

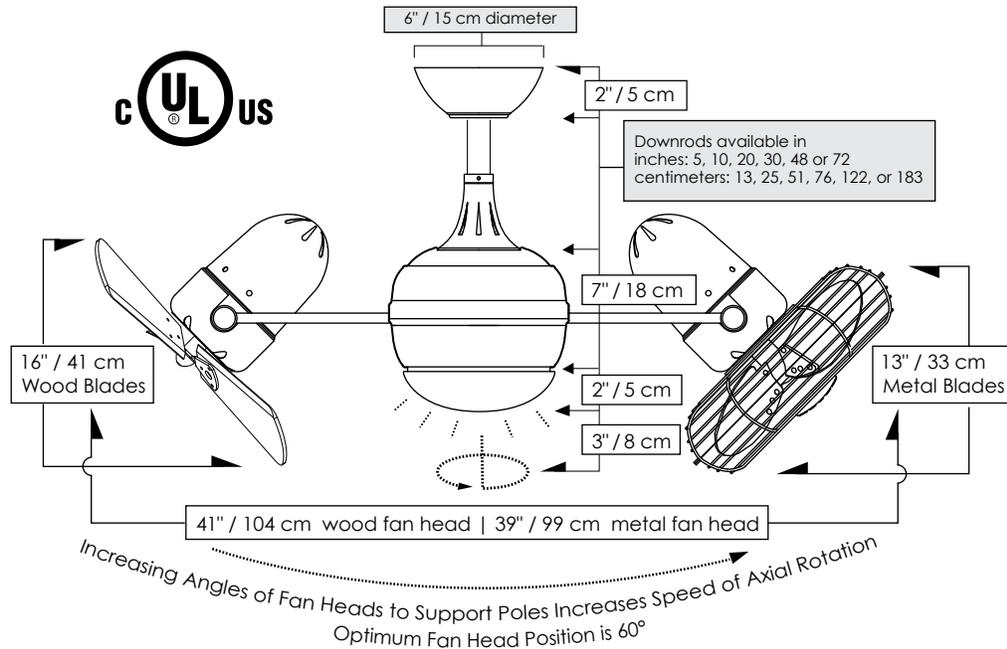

| FAN SPECIFICATIONS | |
|---|---|
| Fan Weight | 22 lbs |
| Voltage | 110 (Please contact us for 220 conversion) |
| Motor Type | AC |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | 1 inch |
| Overall Drop | 14 inches / 41 cm + downrod length |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | Soothing White Noise |
| Safety Certification | UL / CUL |
| Warranty | Limited Lifetime |

| CEILING HEIGHT / DOWNROD TABLE | |
|--------------------------------|---|
| Ceiling Height | Downrod Lengths <i>Field cuttable. Non-threaded</i> |
| 10 ft or less | 5 inches / 13 cm <i>Use safety cages if applicable</i> |
| 10 -12 feet | 10 inches / 25 cm |
| 13 feet | 20 inches / 51 cm |
| 14 feet | 30 inches / 76 cm |
| 15 feet | 48 inches / 122 cm |
| 16 feet + | 72 inches / 183 cm |

| NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA | | |
|--|--------------------------|--------------------------------|
| Fan Head Options | Mahogany Tone Solid Wood | Metal with guard |
| Fan Diameter | 41 inches / 104 cm | 39 inches / 99 cm |
| Fan Blade Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Guard Options | No Cage Option | Safety Cage or Decorative Cage |
| RPM (Low / High) | 757 / 1256 | 1069 / 1442 |
| CFM (Low / High) | 2557 / 4171 | 1844 / 3067 |
| Watts (High) | 87.36 | 80.50 |
| CFM / Watt (High) | 47.74 | 38.06 |
| Blade Pitch | 19° | 31° |

| CEILING PITCH TABLE | |
|---------------------|---------------|
| 0/12 | 0 degrees |
| 1/12 | 4.76 degrees |
| 2/12 | 9.46 degrees |
| 3/12 | 14.04 degrees |
| 4/12 | 18.43 degrees |
| 5/12 | 22.62 degrees |
| 6/12 | 26.57 degrees |
| 7/12 | 30.26 degrees |
| 8/12 | 33.69 degrees |
| 9/12 | 36.87 degrees |
| 10/12 | 39.81 degrees |
| 11/12 | 42.51 degrees |

| LIGHT KIT PHOTOMETRICS | | | | | | |
|------------------------|-----------------|----------------------------|------------------|-----|-------|--------|
| Lamping (Replaceable) | Remote Dimmable | Delivered Temperature in K | Delivered Lumens | CRI | Watts | Hours |
| Integrated LED | Yes | 2969 | 523.7 | 90 | 18 | 50,000 |

Light kit longevity if used 6 Hours/Day: 22.8 Years



Matthews Fan Company
1881 Industrial Drive
Libertyville, IL 60048
Tele: 847.680.9043
Fax: 847.680.8140
www.matthewsfanco.com