




Lighting Your Life Since 1970

Product Specifications - 39104BCTXBPN

Job Name:	Job Type:
Quantity:	Comments:



**39104BCTXBPN**  
Equinox LED Pendant

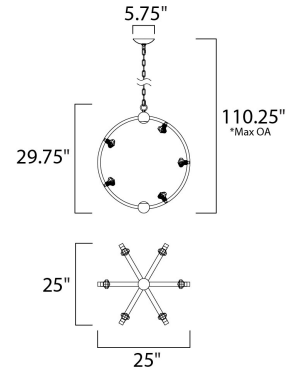

**Finish**

Textured Black / Polished Nickel

**Glass/Shade**

Beveled Crystal

**Product Category**

Single Pendant

**Lamping**

Number of Bulbs	15
Light Type	LED
Bulb Type	G9
Max Bulb Wattage	2.3
Max Fixture Wattage	34.5
Rated Life	
Rated Lumens	±2,850
Color Temp	±3,500 K
Bulb(s)	Included
Light Up/Down	N/A
Beam Spread	N/A
CRI	90+
Photo Cell Included	N/A
Ballast/Driver/Transformer	No
Dimmable	Yes

**Measurements**

Width	25.00"
Height	29.75"
Length	25.00"
Extension	N/A
Back Plate Width	N/A
Back Plate Height	N/A
HCO	N/A
Min Overall Height	31.50"
Max Overall Height	110.25"
Hanging Weight	22.00 lbs
Height Adjustable	Yes
Slope	N/A
Chain Length	N/A
Wire Length	120"
Canopy Width	5.80"
Canopy Height	1.40"
Canopy Length	5.80"

**Shipping**

Carton Weight	27.70 lbs
Carton Width	26"
Carton Height	32"
Carton Length	29"
Carton Cubic Feet	13.87
Master Pack	1
Master Pack Weight	N/A
Master Pack Width	N/A
Master Pack Height	N/A
Master Pack Length	N/A
Master Cubic Feet	N/A
UPS Shippable	Oversize

**Certification**

Safety Rating	Dry
Energy Star	No
CA Title 24	No
CA Title 20	No
ADA	No
Dark Sky	N/A

**Other**

UPC Code	783209127197
Shades Included	N/A
Crystals Included	N/A
Diffuser Included	N/A
Conversion Kit	N/A
Material	Steel+Crystal

**Equivalents**

Incandescent Watts	N/A
Fluorescent Watts	N/A

Maxim Lighting International and all designs, logos and images © 2016 Maxim Lighting International. All Rights Reserved. Maxim Lighting International reserves the right, at any time, to make changes in the design and/or construction of the product including the discontinuation of product without prior notice. Color may vary from what is pictured above due to limitations inherent to photographic processes.

Always consult a qualified, licensed electrician before installation of any product weighing 35 pounds or more. We recommend that a qualified, licensed electrician do the installation. Always install to a mechanically sound structure.