


ASSEMBLY INSTRUCTIONS FOR #12033 2LTLYSC

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1. Turn off power to J-Box.
2. Screw universal crossbar to J-Box.
3. Place fixture screws into fixture holes located on fixture crossbar.
4. Place back plate onto fixture screws tight to fixture.
5. Wire fixture to J-Box wire as per local electrical code.
6. Place fixture with back plate to crossbar and tighten fixture screws.
7. Screw fixture cover to fixture.
8. Place shades into shade fitters, screw bulbs into sockets.
9. Turn power on to J-Box

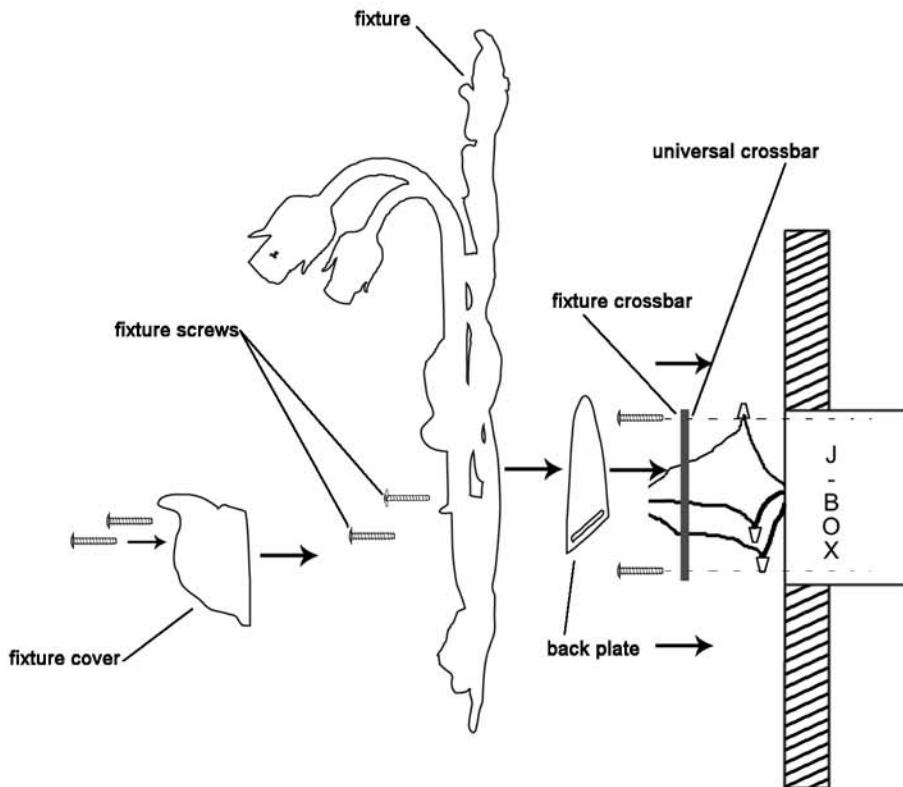

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com