

ASSEMBLY INSTRUCTIONS FOR M45-27, 30, 34, 36, & 42

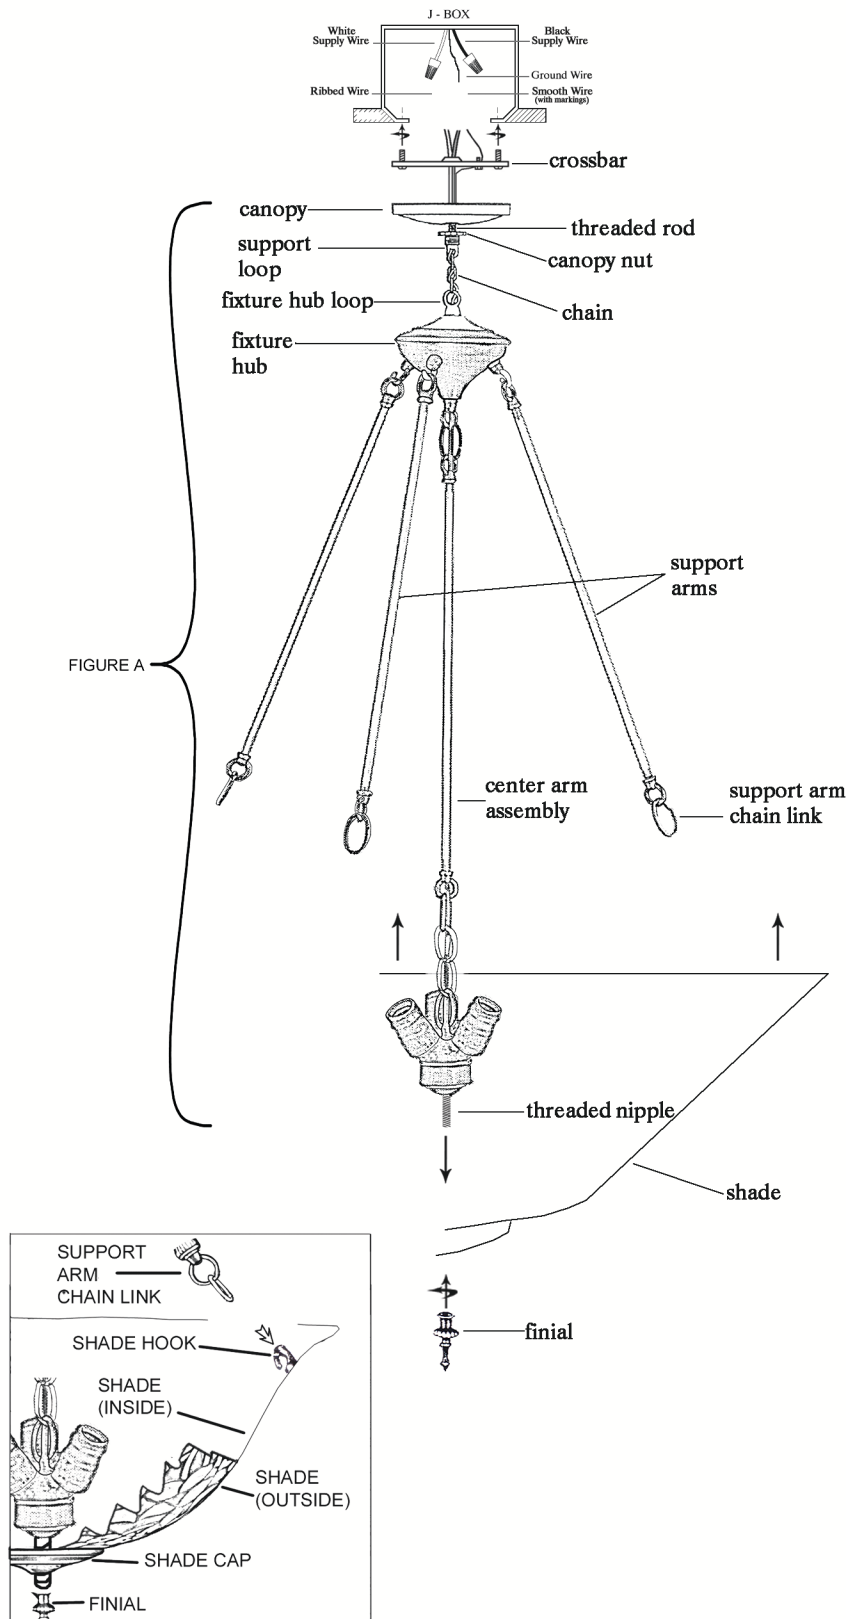


FIGURE A

FIGURE B

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

★ USE THESE INSTRUCTIONS FOR CUSTOM & STANDARD M45 FIXTURES ★

1. Screw threaded rod into crossbar, attach crossbar to j-box.FIG.A
 2. Place canopy & canopy nut onto fixture chain, screw canopy loop onto threaded rod.FIG.A
 3. Determine length of chain required and attach one end to canopy loop, attach the other end of the chain to fixture hub loop.FIG.A
 4. Place fixture wire through threaded rod, wire to j-box as per local elec. code.FIG.A
 5. Screw canopy loop/fixture to threaded rod. Slide canopy up to ceiling and secure with canopy nut.FIG.A
 6. Attach support arm chain link to shade hook. Place threaded nipple through shade cap, attach finial. Screw finial up or down to fine tune tension of arm assembly.FIG.B
- NOTE:** Weight of shade must be on center rod assembly. Fixture arms are for balance only.

These Instructions Can Be Used For The Following Items

#21032 M45-27
#20400 M45-30
#20515 M45-34

#21036 M45-36
#21038 M45-42



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com