

INSTALLATION INSTRUCTIONS

Item#2257 (New. 05/25/2013)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Thread screws (A) into the pre-drilled holes in the circular strap (B) spaced the same distance apart as the holes in the back plate of the fixture body (E) and secure with hex nuts (C).
4. Attach the circular strap (B) to the junction box using the mounting screws (D) (size: #8-32N*L0.5"). The side of circular strap (B) marked "GND" must face out.
5. Install the bulb(s) (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

CONNECTING THE WIRES (Fig. 2)

6. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw provided. After wires are connected, tuck them carefully into the ceiling junction box.


COMPLETING THE INSTALLATION (Fig.1)

7. Align the fixture body (E) onto screws (A) and secure it with cap nuts (F).
8. Secure glass shade (H) to fixture body (E) with ball nuts (G).

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1

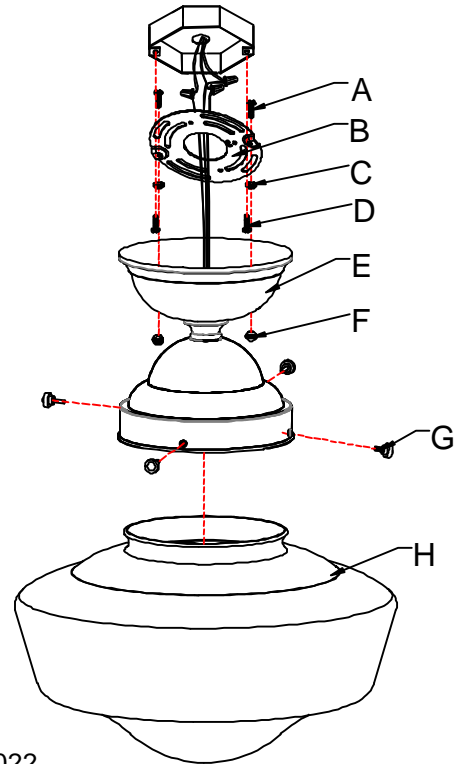

Set# A-022

- Circular strap
- Ground screw
- Mounting Screw*2

Fig. 2

