


INSTALLATION INSTRUCTIONS FOR FIXTURE

Item#4655-579 (New. 2021/02/01)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.


ASSEMBLING THE FIXTURE (FIG. 1)

1. Shut of power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. The arms are collapsed to lay flat for shipping, turn the arms carefully so that they are evenly spaced apart. (See Fig. 1)
4. Thread fixture loop (A) onto all thread (B).
5. Place cap (E) and font (G) onto the arms and secure long all thread (F) and both finials (D).

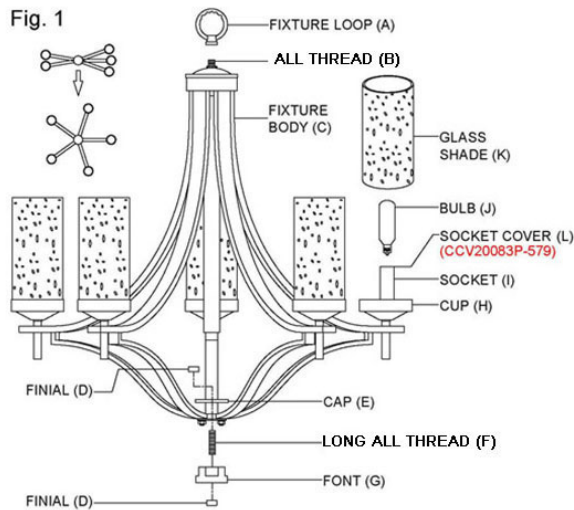

MOUNTING THE FIXTURE (FIG. 2)

6. Thread all thread (S) into collar loop (T).
7. Thread hex nut (R) to the other end of all thread (S). Place the lock washer (Q) over all thread (S) and thread into the crossbar (P). Secure all thread (S) to crossbar (P) with lock washer (Q) and hex nut (R).
8. Take this crossbar assembly and mount to outlet box (V) using outlet box screws (W). The side of crossbar marked "GND" must be face out.
9. Use proper chain pliers to open one end link of chain (X) and connect to fixture loop (A). Close the link.
10. By measuring, determine the correct number of links needed for proper hanging height. Using the chain pliers, disconnect and discard the remaining chain (X).
11. Carefully lace the fixture wires through the chain (X).
12. Slide collar ring (Y) over chain (X), then do the same with canopy (U).
13. Open the other end link of chain (X) and connect to collar loop (T). Close the link.
14. Feed fixture wires through collar loop (T) and all thread (S) and pull the fixture wires until tight.

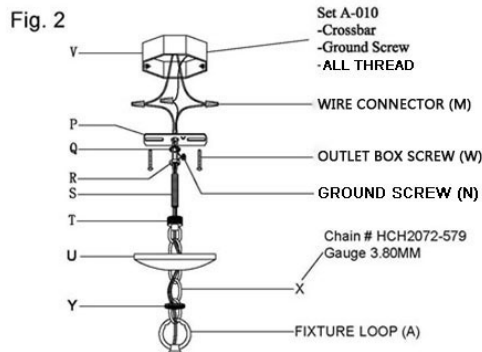

CONNECTING THE WIRE (See fig.3)

15. Connect the electrical wires as shown in Fig. 3, making sure that all wire connectors (M) are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar (P) using the ground green screw (N) provided.
16. Tuck wire connectors (M) neatly into the outlet box and raise canopy (U) over collar loop (T) and secure with collar ring (Y).
17. Install (5) five candelabra base bulbs (J) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
18. Insert glass shades (K) into cups (H).

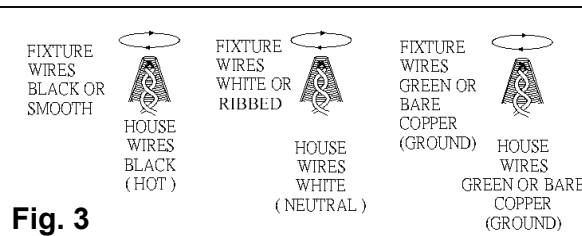


Fig. 3

Your installation is now complete. Return power to the outlet box and test the fixture.



Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



LA-3301E