

INSTALLATION INSTRUCTIONS

Item# N1866-760

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Ensure not to misplace any small parts necessary for installation.
3. Your fixture is supplied with two types of chain, the one set is for main canopy and the other 4x sets are for sub-canopy assembly.
4. Please note: The two sets of chain (ch) is fed with wire and safety cable laced on.
5. To begin assembly of your fixture, first attach the fixture's loop (J) by thread onto all thread (1). Then take the chain (ch) with wire and feed wires through holes of the loop (2) and sub canopy (K). Do same step of the chain with safety cable (sc).
6. Hook the 4x sets of chain (ch) to both sub canopy assembly loop (2) and fixture assembly loop (3).

HANGING THE FIXTURE (Fig. 2)

7. Install 1/4" IPS pipe "not provided" with one end securely mounted to a beam of a structural member. The other end should protrude through the center of the outlet box as shown. Thread hickey (A) on the 1/4" IPS pipe and tighten with hex nut (C).
8. Secure the hex nut (C) and washer (B) onto all thread (D), then thread nipple (D) into the hickey (A); and secure with hex nut (C) and washer (B) on the other end of all thread (D).
9. Thread ceiling loop (E) onto all thread (D) tightly. The all thread length maybe adjusted if necessary.
10. Determine the desired hanging height and discard the excess chain.
11. Open quick link (H) and attach to both ends of chain (I). Slip collar ring (G) and canopy (F) over the chain (I) with quick link (G) and hook onto loop (E/J) then allow canopy (F) to rest on top of fixture loop (J) then thread the 2x quick link (H) closed to secure.
12. Feed the fixtures wires and safety cable through the chain (I), ceiling loop (E) and nipple (D) then allow them to exit through the side open holes of hickey (A).
13. Run safety cable through hickey (A) open hole and secure safety cable with set screw assembly and set screw.

CONNECTING THE WIRE (Fig. 3)

14. Connect the electrical wire as shown in Fig. 3, making sure that all the wire connectors are secured. If your junction box has a ground wire (green, or bare copper), connect fixture's ground wire to it. Otherwise, consult with the professional electrician.
15. Tuck wire connections neatly into junction box (JB).
16. Raise canopy (F) over ceiling loop (E) and secure with collar ring (G)

FINISHING THE FIXTURE (Fig. 1).

17. Install the 12x E12 base light bulbs (LB) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.

DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. You can now turn the power ON and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

WARNING: This luminaire must be mounted or supported independently of an outlet box

FIG. 1

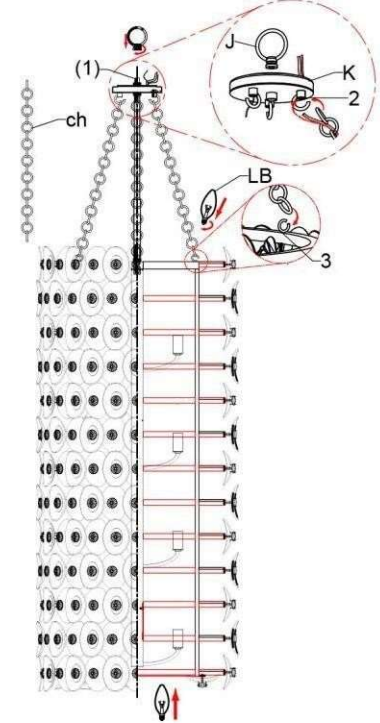


FIG. 2


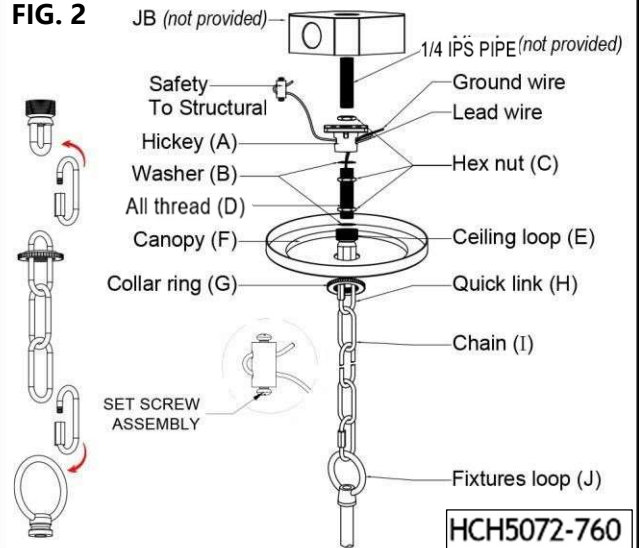


Fig. 3



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

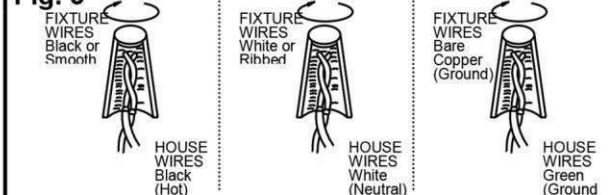