

# INSTALLATION INSTRUCTIONS

Item #N6583/N6584/N6585/N6586/N6587/N6588-272 (01/05/2016)

**READ AND SAVE THESE INSTRUCTIONS**

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.  
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## PREPARING THE FIXTURE (Fig.2)


1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Feed the wires from the socket assembly through the cap and tube (C). Then place the cap over the nipple and secure with tube (C).
4. Feed the fixture wires through the frame (B). Then thread the other end of tube (C) onto the nipple of frame (B).
5. Carefully pass the wires through each rod and the canopy as you assemble. Determine the desired hanging height and thread rods (A) onto the top nipple of frame (B) and into the nipple on the canopy.

## MOUNTING THE FIXTURE (Fig.1)

6. Thread the two fixture screws half way into the pre-drilled holes in the mounting strap spaced the same distance apart as the holes in the canopy.
7. Attach the mounting strap to the outlet box using the box screws (Size: #8-32\*0.5L). The side of the mounting strap marked "GND" must face out.

## CONNECTING THE WIRES (Fig. 3)

8. At this point, raise the fixture to the ceiling and connect the electrical wires as shown in Fig. 3. Be sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting strap using the green screw provided. After the wires are connected, tuck them carefully inside the outlet box.
9. Place supporting cable through lock and secure with screw. Place the supporting cable through mounting strap and lock and secure with screw. (if the fixture provide supporting cable) (Remark N6584/N6586 not applicable)

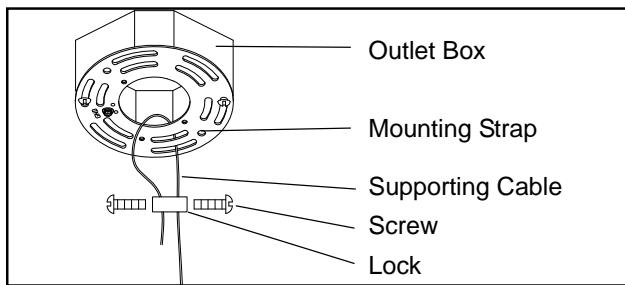

## FINISHING THE INSTALLATION (Fig.1 & 2)

10. Place the fixture canopy onto the two fixture screws and secure with the decorative nuts.
11. Hook the crystal (D) onto the bottom of the fixture body.
12. Install the bulb (s) (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the outlet box and test the fixture.

**Note: The illustration in figure 2 is for installation purposes only. It may or may not be identical to the fixture purchased.**

