

# SPACELY Pendant

## 3-647-1540

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_


PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-1540 Black/Aged Brass

<b>LIGHT SOURCE</b>	(1x) 25W LED Array, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	22W at 120V
<b>RATED LIFE</b>	30000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	3000K Only
<b>LUMEN OUTPUT</b>	Delivered: 1180 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	580mA, 23.2W max power
<b>DIMMING</b>	TRIAC Dimming
<b>CONSTRUCTION</b>	Cold Rolled Steel Housing and Canopy
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	Black/Aged Brass (-1540)
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

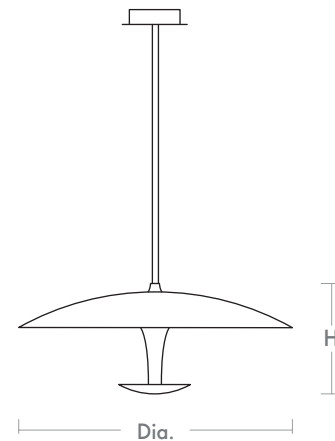

### DIMENSIONS

**Dia. Fixture:** 25.625"

**H. Fixture:** 10.00"

**Supplied with 2-8", 2-12", and 3-16" stems to customize hanging height**

Note: Canopy swivel allows up to a 45° slope

Order example for standard fixture:  
**3-647-1540** (x- Voltage - xxx-Sequence # - xx-Finish)  
3: 120V Only

