

# LUNA Pendant

120v : **3-673-xx**  
277v: **37-673-xx**

# oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_




-24 Satin Nickel

-20 Polished Nickel

-22 Oiled Bronze

-40 Aged Brass

<b>LIGHT SOURCE</b>	1 x 8.2W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	10.3 W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 740 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V or 277V
<b>DRIVER OUTPUT</b>	350 mA, 12W
<b>DIMMING</b>	0-10v &Phase (ELV) Dimming 50/60Hz 100% to 10% Dimming
<b>CONSTRUCTION</b>	Plated Steel and Glass
<b>DIFFUSER</b>	- White Opal Glass
<b>FINISHES</b>	Polished Nickel (-20), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
<b>MOUNTING</b>	4" Octagonal J-Box, 2"x 3" J-Box
<b>STANDARDS</b>	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

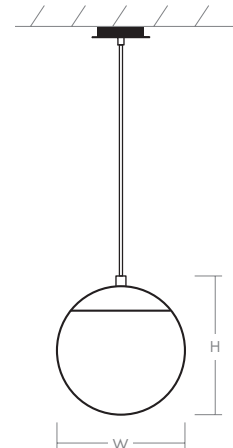

## DIMENSIONS

**Dia. Canopy: 5.88"**

**W. Fixture: 11.88"**

**H. Fixture: 12.63"**

**Supplied with 8 ft braided cord**

Order example for standard fixture:

**3-673-24** (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-673-2724**

27: 2700K, 35: 3500K, 40: 4000K

