

Onion LED Pendant Ceiling Stem Hung with 6 links of chain Mounted • Dry Location Listed **PROGRESS LED**

Description:

One-Light Pendant

Specifications:

- Brushed Nickel, Painted White Inside Metal Shade
- White Acrylic Diffuser
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 4.9375 in W., 1.125 in ht., 4.9375 in depth
- Mounting strap for outlet box included
- 120 in of wire supplied
- 1 EA Six links 9 Gauge

Performance:

Number of Modules	1
Input Power	17 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1,211/71.2 (LM-82)
Lumens/LPW (Delivered)	657/39.3 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60000 (L70/TM-21)
EMI/RFI	Meets FCC Title 47, Part 15 Class B
Max. Operating Temp	30 °C
Warranty	5-year Limited Warranty
Labels	cCSAus Dry Location Listed

P5187-0930K9




Dimensions:

Diameter: 10 in
 Height: 10-3/4 in
 Overall Ht. W/Chain And Stem: 77 in

Brushed Nickel, Painted White Inside Metal Shade
 Diameter: 10-1/16 in
 Height: 10-5/16 in

White Acrylic Diffuser
 Width: 5-13/16 in
 Height: 0.5 in

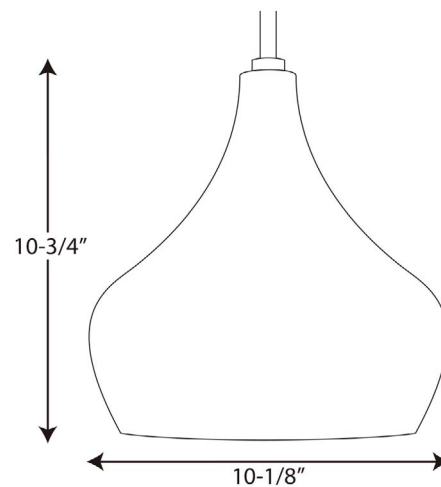

P5187-0930K9

Photometrics:

ELECTRICAL DATA	P5187-0930K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Power Factor	Greater than 0.90
THD	<20%
EMI/RFI	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	


P5187-0930K9
 LED Light Engine: 3000 K 90 CRI
 System Wattage: 17
 Fixture delivered lumens: 657
 Fixture Efficacy: 39.3
 Spacing Criteria: 1.3

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	285	
5	289	28
15	298	84
25	277	127
35	226	140
45	147	114
55	79	71
65	48	48
75	32	34
85	12	13
90	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	239	36.3
0-40	379	57.6
0-60	563	85.7
0-90	657	100.0
90-180	0	0.0
0-180	657	100.0

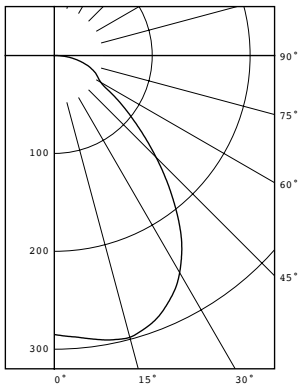

Test 15.00758 Test Date 05/12/15

P5187-0930K9

Dimming Notes:

P5187-0930K9 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron_Nova T NTELV-300

Lutron_Vierti VTELV-600

Lutron_Maestro MAELV-600

Lutron_spacer/system SPSELV-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.