

ASSEMBLY AND INSTALLATION



INSTRUCTION

Please read carefully and save this instruction, as you may need them at a later date.

CAUTION


Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock. If you are unfamiliar with proper electrical wiring connections, please consult of a qualified electrician before installing

Installing Step:

Remove the fixture and the mounting package from the box and make sure that no parts missing in the box.

NOTE: THIS FIXTURE IS CONVERTIBLE TO PENDANT OR SEMI-FLUSH

1. Difference between Pendant and Semi-flush is the quantity of the Tube.
2. Thread Center Rod (12) onto Nipple (13), put metal flat to the Nipple (14), and screw it with Ring Nut (4).
3. For Pendant please thread the Tube (6) onto Nipple (14), then connect all the Tubes together, On the other end thread Swivel (3) onto Tube (5).
4. For Semi-Flush please thread Tube (6) onto Nipple (14), thread Swivel (3) onto Tube (6) directly.
5. Attach the Glass (11) to the Fixture body, and screw them with Ball Nut (7), Rubber Washer (8) and Finial (9).
6. Use Ball Nut (2) to thread Canopy (1) onto ceiling tightly.
7. Install bulbs: (Bulbs not including in the package)
(Please don't exceed the maximum capacity that recommended on the Sockets)

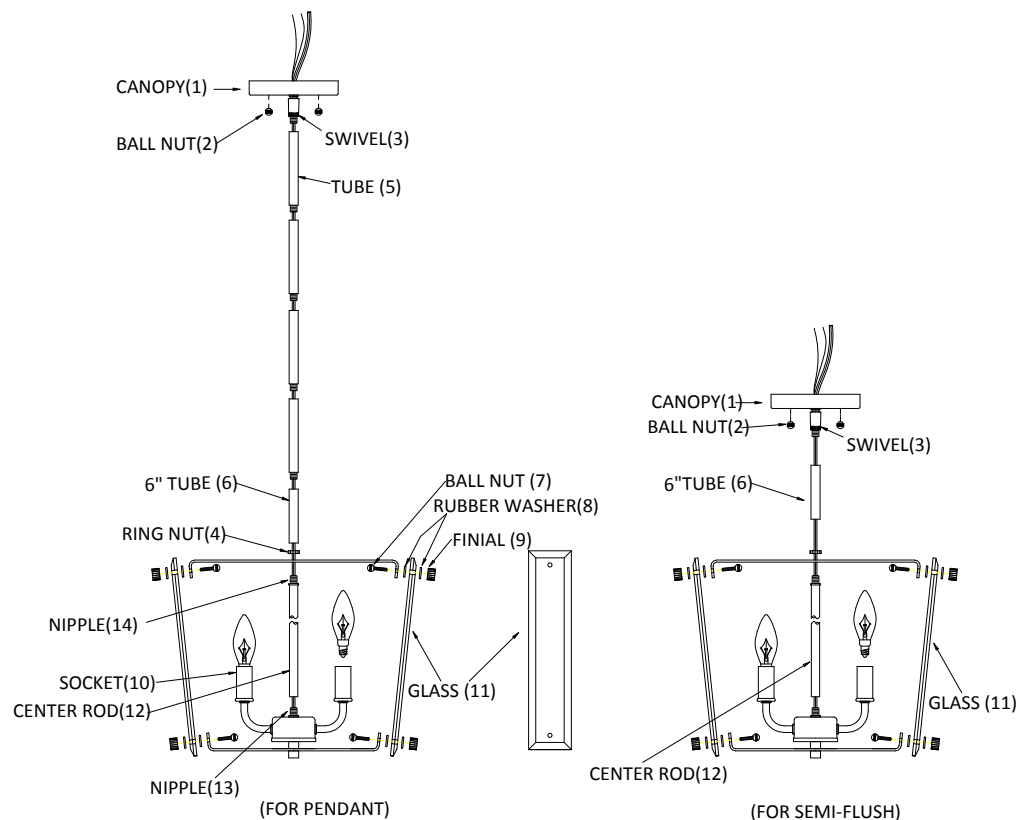

6-7110-4-SN
6-7110-4-89
6-7110-4-322

INSTALLATION IS NOW COMPLETED.