

SMaRT Control Series

ENGINEER AND ARCHITECT SPECIFICATION

Solaira SMaRT 34A - Dual Voltage, Variable Control



Intertek

SPE 1000 CANADA INSPECTED



SMRTVMT



SM-WSD

Digital Variable Control

Adjust up to 34 amps of heater output to desired level
8000W @208 – 240V or 4000W @ 110-120V

Temperature Monitoring

Built in temperature sensor to operate heater per user setpoint

Soft Start Technology

Engineered feature extends emitter life by up to 30%

Water Resistant Enclosure

IP44

Optional Accessories

Wall Switch (SM-WSD)

Handheld IR Remote (SMRTVMT)

Remote Temperature Monitor (SMRTVTEM-R)

Occupancy Monitor (SMRTOCC)

Solaira SMaRT 34-Dual Voltage Variable Controller is part of a family of water-resistant Solaira SMaRT controllers designed to provide energy savings when used with infrared heaters or other heating and lighting products. The Solaira SMaRT 34A-Dual Voltage Variable Controller has a 1 to 5 step setting allowing you to find the optimum comfort setting in your specific area. With energy saving a major factor in the design, the feature rich Solaira SMaRT 34-Dual Voltage can automatically manage your heating system.

The microcontroller-based unit incorporates zero-voltage switching and a soft-start function to eliminate the heaters initial high inrush current, potentially increasing heater emitter life by as much as 30%. Installation of the unit is simple and once installed, the solid-state controller is relatively maintenance-free.

Temperature Monitoring

The controller has a built in temperature sensor that monitors the temperature and inhibits the heaters when the temperature exceeds a pre-determined set point of between 41°F (5°C) to 77°F (25°C). The controller can also be fitted with an optional remote location temperature sensor if the controller is in a different area than the heater location.

Handheld Remote and Wall Switch (optional)

An optional handheld remote that communicates via IR to either the SMaRT Controller or optional Wall Switch (SM-WSD) for the ultimate convenience. The Wall Switch can also operate without the remote with its on-board push buttons.

Occupancy Monitoring (optional)

If you want to have the heaters turn on and off automatically based on people in the space, the controller can also be fitted with an optional remote Occupancy Monitor. When the controller is equipped with the optional Occupancy Monitor, the heaters are switched on for a user-settable time period of between 5 and 60 minutes.

Why Invest in Quality Solaira SMaRT Controls.....

The thought of the heaters being left on is a constant concern for business operators regardless of your installation. The Solaira SMaRT Series Controller was designed to minimize this concern and ensure your guests are kept warm and not the furniture when no one is there. With maximizing comfort and minimizing energy consumption, the Solaira SMaRT 34A-Dual Voltage Variable Controller allows you to concentrate on your business and entertaining and not on whether the heaters are still switched on?

The Solaira SMaRT 34A-Dual Voltage Variable Controller has been engineered to allow the user to vary the output of the heaters for the ideal comfort level. With the temperature monitoring feature and the addition of an optional remote control or occupancy monitor, the user can manage a comfortable environment and ensure energy is not wasted while money is being saved.

PART#	MAX LOAD	MAX LOAD	VOLTAGE	HEATING CONFIGURATION
SMaRT34-DV	34 Ampere	8000W	208-240V	Up to 4 x 1500W or 1600W, 208/240 Up to 3 x 2000W, 208/240 Up to 2 x 4000W or 3200w, 208/240 Up to 1 x 6000w or 6400W, 208/240
	34 Ampere	4000W	110-120V	Up to 2 x 1500W or 1600W, 110/120

TECHNICAL SPECIFICATION

Voltage: Electrician Selectable Dual Voltage
208 - 240Vac or 110 – 120V, 50/60 Hz

Factory Setting: 208 – 240V

Max Wattage: 8000W total @ 208-240V, 4000W total

Max Ampere: 110-120V 34 A

Temperature on/off set point: 41°F (5°C) to 77°F (25°C)

Factory set on/off point: 70°F (20°C)

Enclosure: Surface Mounted, heat sink at rear

Enclosure operating temperature range: -4°F (-20°C) to 104°F (40°C)

Enclosure Material/ Protection Rating: UL94 certified enclosure, IP65 Water Resistant for outdoor/indoor use

Dimensions: 11" X 6-5/8" X 3-1/8" (280 X 170 X 80 mm)

Inspection: cETL SPE-1000 (Can)

Range
30' (6 Meters)


Optional Accessories:

Operating Voltage 12V dc Detect angle and range 90° Adjustable up to 50' (18 Meters)

Wall Switch: SM-WSD
Wireless Handheld Remote: SMRTVRMT
Occupancy Monitoring Sensor: SMRTVOCC
Remote Temperature Sensor: SMRTVTEMR

Dimensions
4-5/8" X 4-3/8" X 2-1/8" (115 X 110 X 55 mm)

Warning: No other controls are to be utilized with this controller other than outlined on this specification sheet

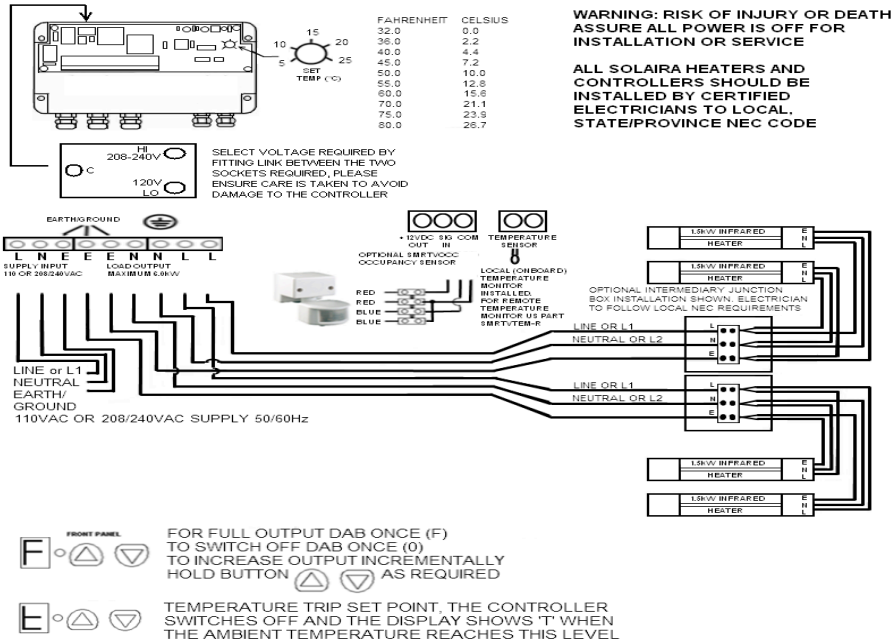

Connection Diagram is for illustrative purposes only. Determination of suitability, specification and installation remains the responsibility of a certified electrician in complying with local, state/provincial and N.E.C. codes and requirements

SOLAIRA SMaRT34-DV VARIABLE CONTROL

JOB NAME _____ JOB LOCATION _____
 ARCHITECT _____ ENGINEER _____
 CONTRACTOR _____ SUBMITTED BY _____ DATE _____
 ITEM SPEC _____ add options _____ + _____ + _____ QTY _____

Solaira™ is a registered trademark of Inforesight Consumer Products Inc.

125 Traders Blvd #4, Mississauga, Ontario Phone: 866-321-8373 local 905-568-7655 Fax: 905-568-7521 web: www.solairaheaters.com email: info@solairaheaters.com

Note: Inforesight Consumer Products Inc. website and product information can be accessed from Canada and other countries around the world. Customer understands that some or all products provided by Inforesight Consumer Products Inc. may not be available for purchase or installation in certain jurisdictions or geographical areas. Inforesight Consumer Products Inc. reserves the right, in its sole discretion, to exclude or otherwise limit the provision of any product to a person or entity residing in any jurisdiction or geographical area outside of Canada. Inforesight Consumer Products Inc. provides general product information, installation guidelines and procedures and Customer understands that Customer is solely and exclusively responsible for installation of the product and ascertaining all applicable local municipal, provincial, state, and federal NEC (National Electrical Code) rules, by-law, ordinances and guidelines applicable to the installation of any Inforesight Consumer Products Inc. products. Customer must strictly adhere to and be compliant with the local rules, laws, ordinances and legal requirements for the safe installation and use of any Inforesight Consumer Products Inc. products. Instruction manuals are included with the product packaging and copies of our instruction manuals are available upon request. Under no circumstances shall Inforesight Consumer Products Inc. or its affiliated entities, employees, agents, shareholders, officers or directors be liable to Customer or any third party for any product installations and Customer releases Inforesight Consumer Products Inc. from any and all losses, death, personal injury, property damage, other damages, rights, claims, demands and actions of any kind arising from the Customer's installation and use of the product, whether the installation was or was not in accord with the provided instruction manual and/or in compliance with applicable local laws. Due to ongoing product improvements, specifications and dimensions are subject to change and correction without notice and without incurring obligations.