


ASSEMBLY AND INSTALLATION INSTRUCTIONS

P0315

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTION.


Hardware Package (included):

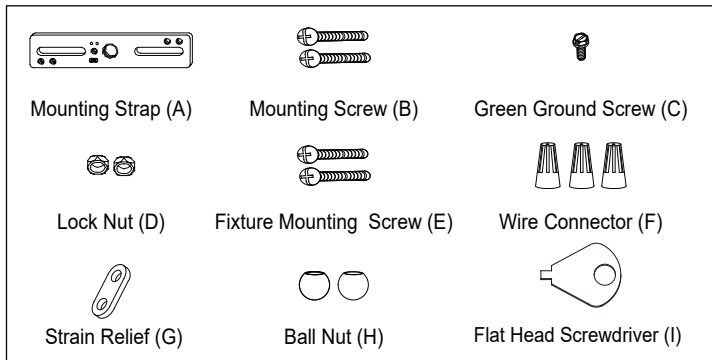

Installation Steps

Turn off the power at fuse or circuit box.

1. Unscrew two ball nuts (H), remove mounting strap (A) from canopy.
2. Loosen the plastic headless screw on the canopy by using a flathead screw driver (I).
3. Push the guy wires up into the canopy. Press bushing up and pull the guy wires down.
NOTE: The guy wires and power cord should be approximate height and power cord is some what loose to prevent the power cord wire load.
4. Thread the cord through the canopy and strain relief (G). Measure the desired length of the cord (a) from the canopy to the glass shade and leave additional 9" cord (b) above the canopy (include the canopy), then cut off the unnecessary cord. (See Fig.1)
5. Adjust strain relief (G) at 9" position from the top of the cord.
6. Mark the 3" cord (c) from the top of the cord (b). Use a knife to peel off the insulation of the cord (c) carefully to show the 3 inside wires out. (See Fig. 1)
Caution : Cutting too deep may cut off three inside wires and destroy the insulation surface of the three inside wires.
7. Peel off the 3 wires from the top about 3/8" long (d) to expose the copper for wiring.
8. Attach the mounting strap (A) to outlet box by using two mounting screws (B).


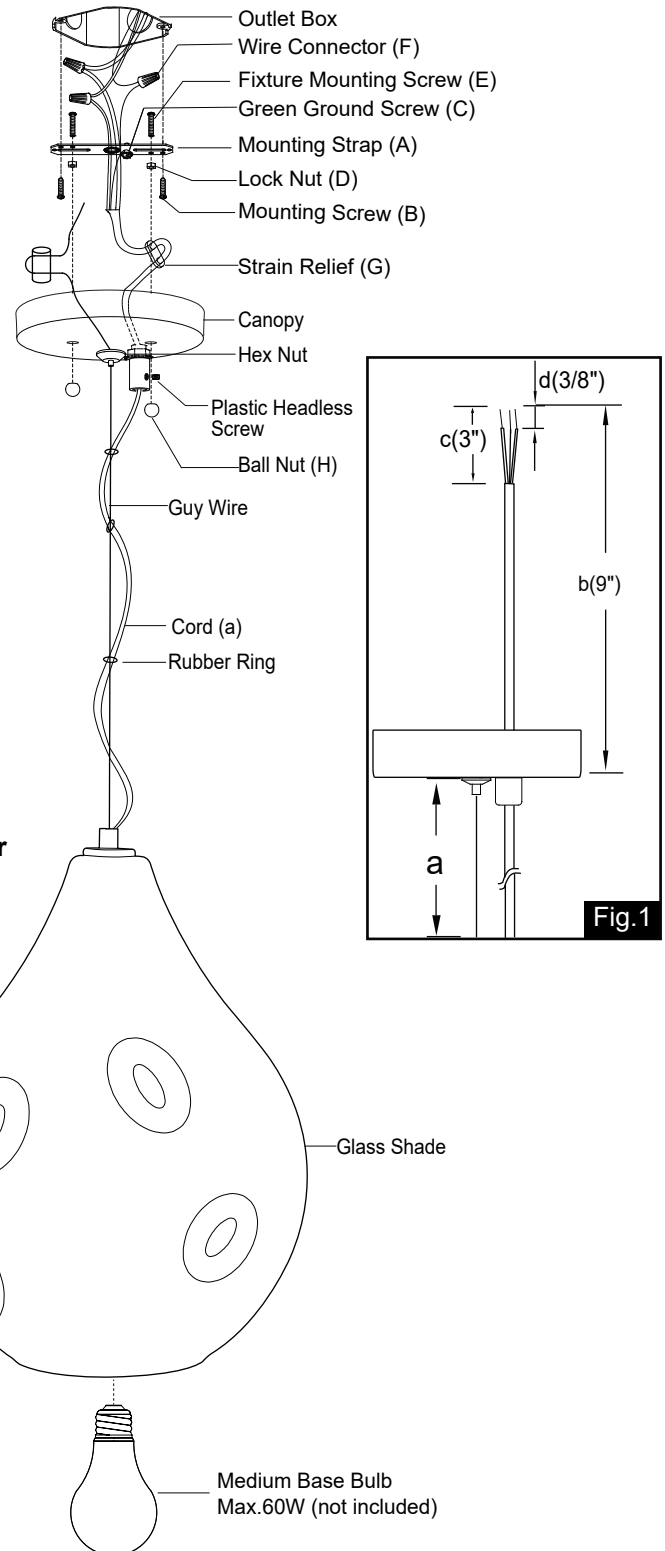


9. Pull out the source wires from the outlet box. Make wire connections using wire connectors (F) as follows:
 - a. Connect the hot wire marked "L" from the fixture to the black wire from the power source.
 - b. Connect the neutral wire marked "N" from the fixture to the white wire from the power source.
 - c. Connect the copper wire or green wire marked "⊥" from the fixture to the mounting strap (A) by securing it with the green ground screw. The green ground wire marked "⊥" from the fixture to the green ground wire from power source. Carefully put wires back into the outlet box.
10. Pull the cord (a) down slightly until the strain relief (G) touches the hex nut. Attach two fixture mounting screws (E) to the mounting strap (A), then secure it with two lock nuts (D). Adjust the length of the fixture mounting screws (E) if necessary, then secure it with two ball nuts (H).
11. Fastening cord by screwing plastic headless screw, using flat head screwdriver (I). Move the rubber ring of the fixture wire and guy wire to the proper position to achieve beautiful.
12. Install a bulb (not included). Check relamping label at socket area or packaging for maximum allowed wattage.

Turn on the power at fuse or circuit box.

The following parts are available for re-order if damaged or missing.

Spare Parts List:

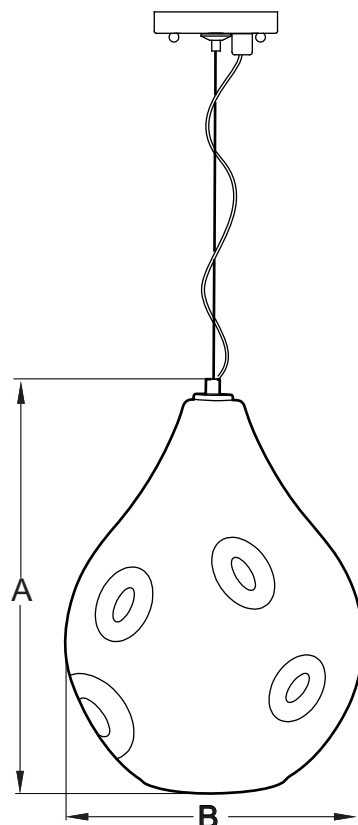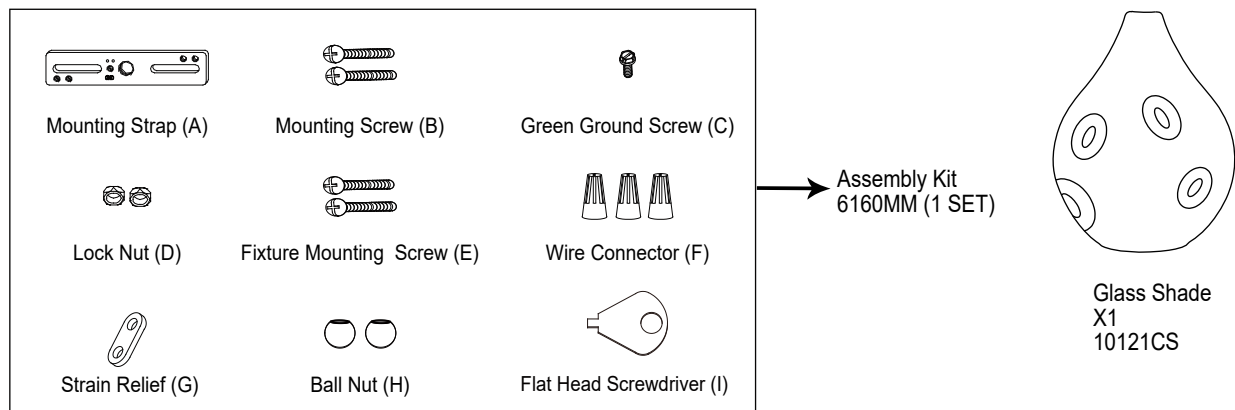

A: 16-1/8"

B: 11-3/4"