



ASSEMBLY AND INSTALLATION INSTRUCTIONS

W0356

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

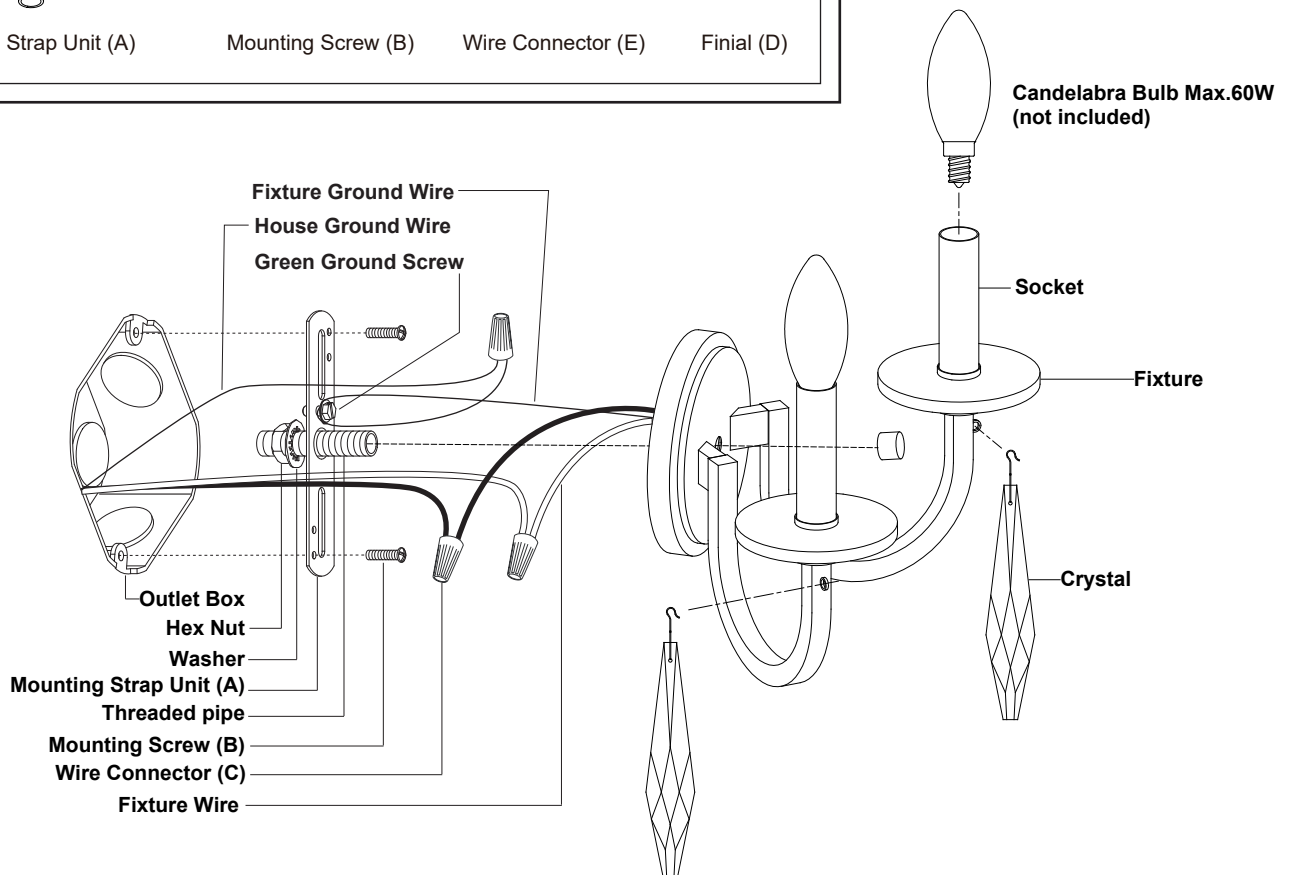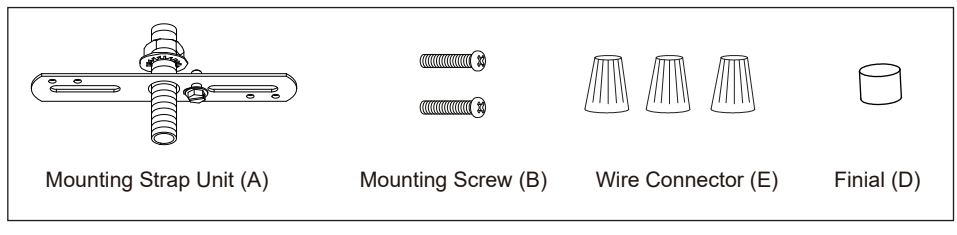

Installation Steps

Turn off the power at fuse or circuit box



1. Attach the mounting strap unit (A) to the outlet box by using two mounting screws (B).
2. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wire (black insulation) from the power source to the black wire from the fixture.
 - Connect the neutral wire (white insulation) from the power source to the white wire from the fixture.
 - Attach the fixture ground wire (green insulation or bare wire) to the mounting strap unit (A) with the green ground screw, or connect to the source ground wire if available.Carefully put the wires back into the outlet box.

3. Attach the fixture to the mounting strap unit (A) by inserting the threaded pipe, then secure it with finial (D).
4. Install bulbs (not included).
See relamping label at socket area or packaging for maximum wattage allowed .
5. Attach the crystal to the fixture.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

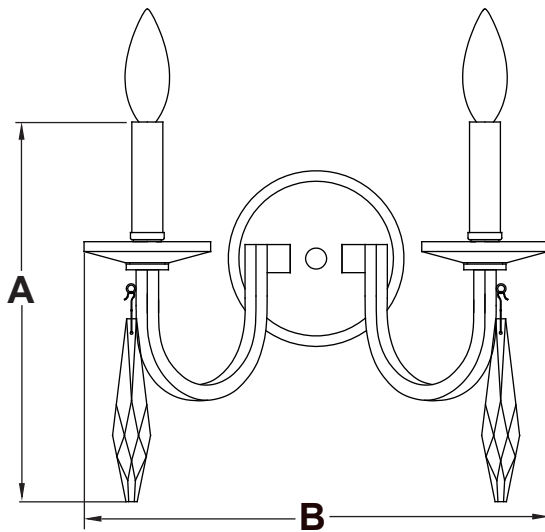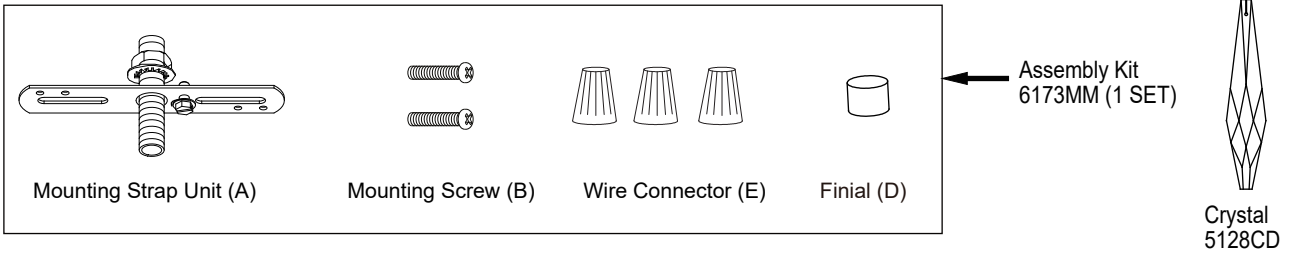

A: 13-1/4"

B: 10-1/2"

C: 6-1/2"

