

46.5" ROUND MULTIPOINT CANOPY

VISUAL COMFORT & CO.

PRODUCT FEATURES



LAMPING

When installing pendants on the same plane, diameter should not exceed 7.5".

ORDERING INFORMATION

SLCH576 FINISH

HAB HAND RUBBED ANTIQUE BRASS

B NIGHTSHADE BLACK

N POLISHED NICKEL

SLCH576 _____
JOB NAME _____
NOTES _____




46.5" ROUND MULTIPOINT CANOPY

VISUAL COMFORT & Co.

SPECIFICATIONS

| | |
|-------------------------------|----------------|
| PRIMARY MATERIAL | Steel Or Brass |
| SHADE MATERIAL | |
| NET WEIGHT | 129 lbs |
| HEIGHT | 1.9in |
| WIDTH | 46.5in |
| LENGTH | 46.5in |
| UP LIGHT / DOWN LIGHT / BOTH? | |
| WET LISTED | |
| DAMP LISTED | |
| DRY LISTED | |
| MIN. HANGING HEIGHT | |
| MAX HANGING HEIGHT | |
| TOTAL CORD LENGTH | |
| TOTAL STEM LENGTH | |
| STEM QTY | |
| SLOPED CEILING ADAPTABLE? | Yes 45° Max |
| GENERAL LISTING | ETL Listed |
| INCLUDES | |

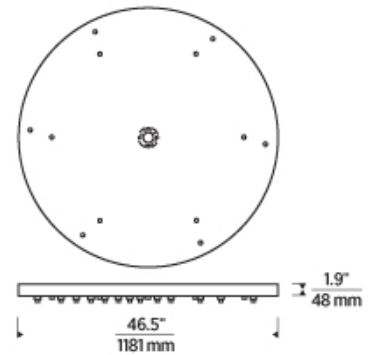

LAMPING SPECIFICATIONS

| | LED LAMP | INTEGRATED LED | NON LED | NO LAMP |
|-----------------------|----------|----------------|---------|---------|
| DELIVERED LUMENS | | | | |
| WATTS | | | | |
| MAX WATTAGE PER BULB | | | | |
| CCT | | | | |
| CRI | | | | |
| LED LIFETIME | | | | |
| L70 | | | | |
| AVERAGE BULB HOURS | | | | |
| FIELD SERVICEABLE LED | | | | |
| LAMP BASE | | | | |
| LAMP SHAPE | | | | |
| LAMP INCLUDED? | | | False | |
| WARRANTY** | | | 1 Year | |

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

| | Integrated LED | Replacement LED Lamp | No Lamp * |
|---|----------------|----------------------|-----------|
| This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8. | | | N/A |
| This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California. | | | N/A |

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

