PRODUCT FEATURES

- Available in a Nightshade Black Finish
- Mounting hardware included

LAMPING

Black T Connector

| Black I Connector | Black L Connector | Black T Connector | Black 5-Way Connector |

To view all available finish options, please visit techlighting.com

ORDERING INFORMATION

700BRX	SHAPE OR SIZE	FINISH
	4 4 WAY CONNECTOR	**B** NIGHTSHADE BLACK
	5 5 WAY CONNECTOR	
	C CORNER CONNECTOR	
	I I CONNECTOR	
	L L CONNECTOR	
	T T CONNECTOR	
	W WALL CONNECTOR	
	X X CONNECTOR	

700BRX

JOB NAME

NOTES

SPECIFICATIONS

PRIMARY MATERIAL	Aluminum
SHADE MATERIAL	Aluminum
NET WEIGHT	0.2 lbs
HEIGHT	1.55in
WIDTH	1.55in
LENGTH	2.1in
WET LISTED	
DAMP LISTED	Yes
DRY LISTED	
GENERAL LISTING	ETL Listed
INCLUDES	

4-WAY CONNECTOR — 2.1" 53mm, 1" 25mm, 1.6" 41mm
5-WAY CONNECTOR — 1.6" 41mm, 2.1" 53mm, 2.1" 53mm
X CONNECTOR — 2.1" 53mm, 2.1" 53mm, 1" 25mm
T CONNECTOR — 1.6" 41mm, 1" 25mm, 2.1" 53mm
L CONNECTOR — 1.6" 41mm, 1" 25mm, 1.6" 41mm
I CONNECTOR — 1" 25mm, 2.1" 53mm, 1" 25mm
CORNER CONNECTOR — 1" 25mm, 1.6" 41mm, 1.6" 41mm
WALL CONNECTOR — 1" 25mm, .63" 16mm, 1" 25mm
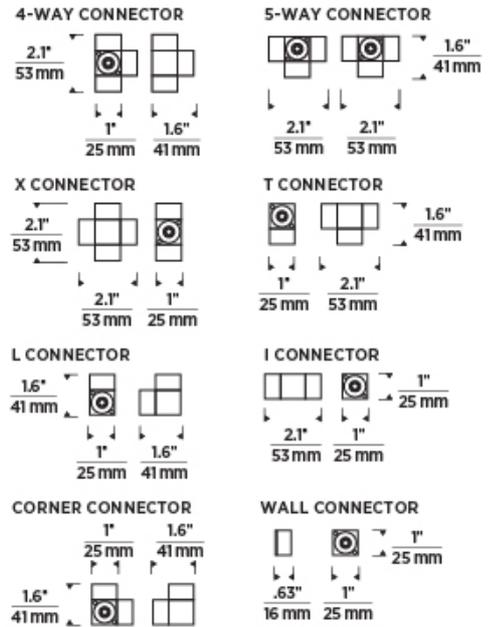
LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS				
MAX WATTAGE PER BULB				
INPUT VOLTAGE/ DIMMING TYPE				
CCT				
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE				
LAMP SHAPE				
LAMP INCLUDED?				
WARRANTY**			1 Year	

* Dimming information available at www.techlighting.com/Downloads#dimming
** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 **Title 24** Part 6 / JA8.			N/A
This product can be used to comply with California Appliance Efficiency Standards 2016 **Title 20** and may be shipped to and sold in California.			N/A

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.