
## **BBL2072** ASSEMBLY & INSTALLATION GUIDE

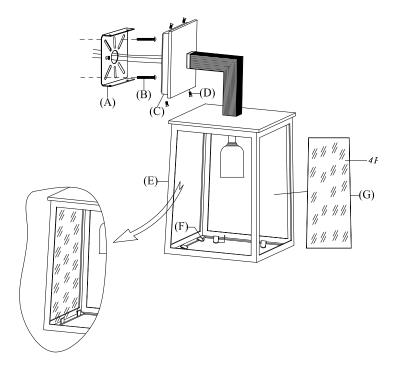

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

## INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

## ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

- 1. Remove mounting plate (A) from fixture base (C) by unscrewing base screws (D).
- 2. Attach mounting plate (A) to wall outlet box and secure with mounting screws (B).
- 3. Attach ground (green) wire to ground wire from wall outlet box (usually green or copper in color), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
- 4. Connect neutral (white) fixture wire coming from fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
- Repeat the procedure with the hot (black) wires. Always make sure that no wire strands are left outside the connectors. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
- 6. Attach fixture base (C) onto the affixed mounting plate (A) and secure with base screws (D).
- 7. To install glass panels (G) provided to each frame, make sure metal tabs (F) are flipped up. Place the rest three glass panels to each frame, secure the glass panels by bending back the metal tabs (F) downwards.
- 8. Insert light bulb into socket.
- 9. TO INSTALL GLASS PANELS

NOTE: To install glass panels provided to each frame, make sure metal tabs are flipped up. Place the glass panel to each frame, secure the glass panel by bending back the metal tabs downwards with a tool.

## VISUAL COMFORT & CO. Est. 1987