




# ASSEMBLY INSTRUCTIONS



TO assemble safety cables:

1. Join fixture safety cables with safety cable from ceiling.
2. Wrap both safety cable around the cable lock nut.
3. Insert screws into both holes on cable lock nut, secure screws with screwdriver.
4. Push the cable lock nut into outlet box.

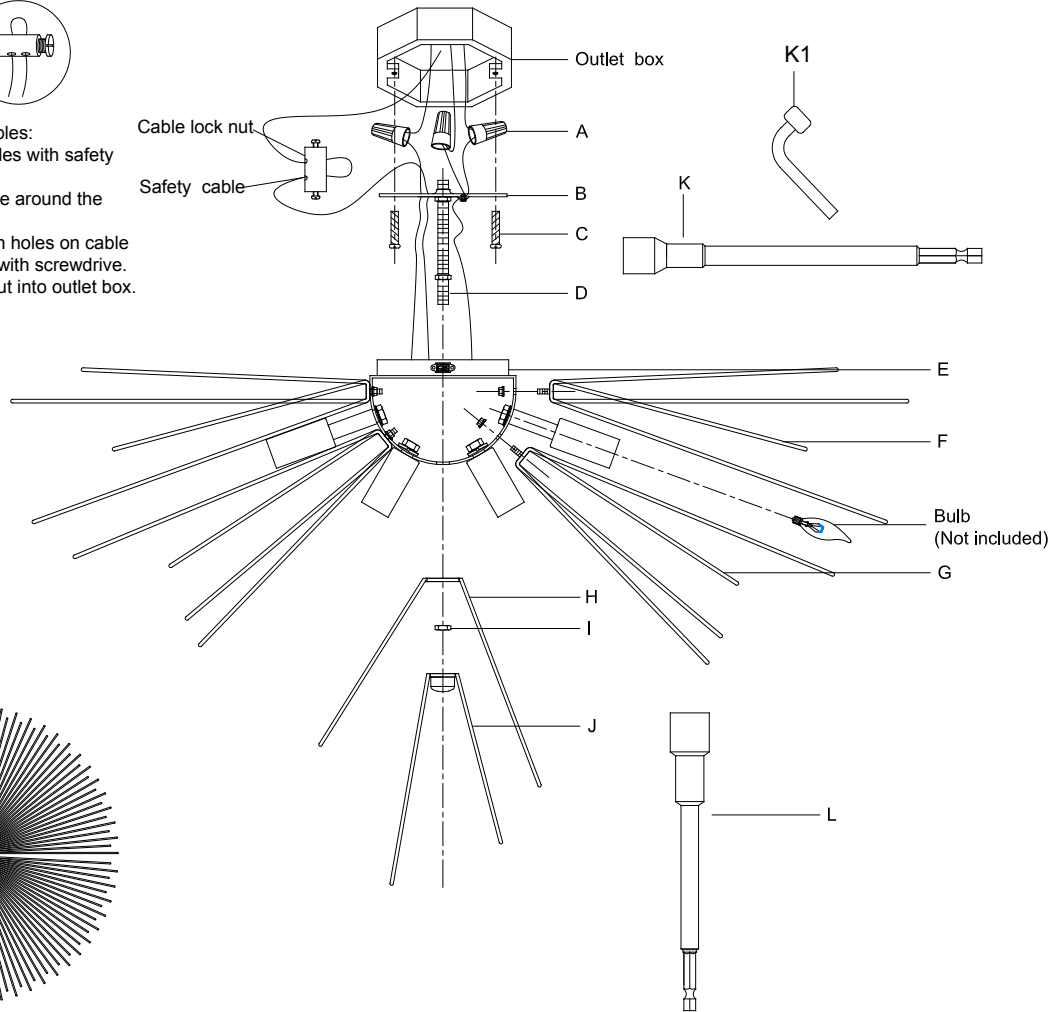

## Strada Large Flush Mount

Item # KW 4071

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**

1. Carefully remove all parts from the box.
2. Remove the crossbar (B) from the fixture by loosening the bottom branch (J) & nut (I) & branch (H).
3. Affix crossbar (B) to outlet box and secure with mounting screws (C).
4. Attach branch (G) to the metal ball (E), then secure with hex nut by wrench (K) provided,
5. Attach all branches (F) to the metal ball (E), then secure with hex nut by wrench (K1) provided.  
IT IS IMPORTANT TO LET ALL BRANCHES (F) ASSEMBLED AND EVEN DISTRIBUTION, THEN TIGHTEN IT BY WRENCH.
6. Tighten the hex nuts using wrench provided.
7. Insert bulbs (not included) into the sockets.
8. Connect the hot wire (BLACK) from the fixture to the hot wire from the outlet box (usually BLACK). Fasten them together with a plastic wire connector (A) provided and wrap the connection with electrical tape.
9. Repeat this procedure for the neutral wire (WHITE) from the fixture to the wire from the outlet box (usually WHITE).  
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
10. Connect ground wire from the fixture (bare copper) to ground wire from the outlet box (usually green or copper in color).  
IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
11. Attach the fixture with branch (H) to the crossbar (B) and let threaded nipple (D) go through the center hole of the fixture, then tighten with hex nut (I) by wrench (L) provided.
12. Thread the branch (J) to the bottom of threaded nipple (D).
13. Installation is complete, turn on power at fuse or circuit breaker.

\*\*\*Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.



**VISUAL COMFORT & Co.** Est. 1987

## ASSEMBLY INSTRUCTIONS

### Strada Large Flush Mount Item # KW 4071

---

For a more personalized style you are able to gently bend spines in any direction.  
**NOTICE: BENDING SPINES MULTIPLE TIMES CAN CAUSE THEM TO BREAK**

