

# TOB2062

## ASSEMBLY & INSTALLATION GUIDE


**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

1. To detach mounting plate (A) from light fixture (D) by removing cap nuts (E).
2. Install safety steel wire to back plate (A) as shown in illustration.
3. Attach ground (green) wire to ground wire from wall outlet box (usually green or copper in color), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape so the end of the connector is sealed.  
IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
4. Connect neutral (white) fixture wire coming from fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
5. Repeat the procedure with the hot (black) wires. Always make sure that no wire strands are left outside the connectors.  
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
6. Position the mounting plate (A) diagonally so that the holes of mounting plate (A) and the wall outlet are aligned. Tighten the mounting plate onto the wall outlet by mounting screws (C) provided.
7. Gently push the light fixture (D) onto the wall outlet, letting rods (B) pass through the holes on the light fixture (D) and tighten by screwing cap nuts (E) to the exposed part of rods in clockwise direction.
8. Insert light bulb into socket.
9. Remove thumbscrew (G) from support tab (F).
10. Insert glass shade (I) into glass holder (J), and cover the top with cap (H), aligning hole on (H) with threaded hole on (F). Insert thumbscrews (G) to secure cap (H) to fixture base (D).

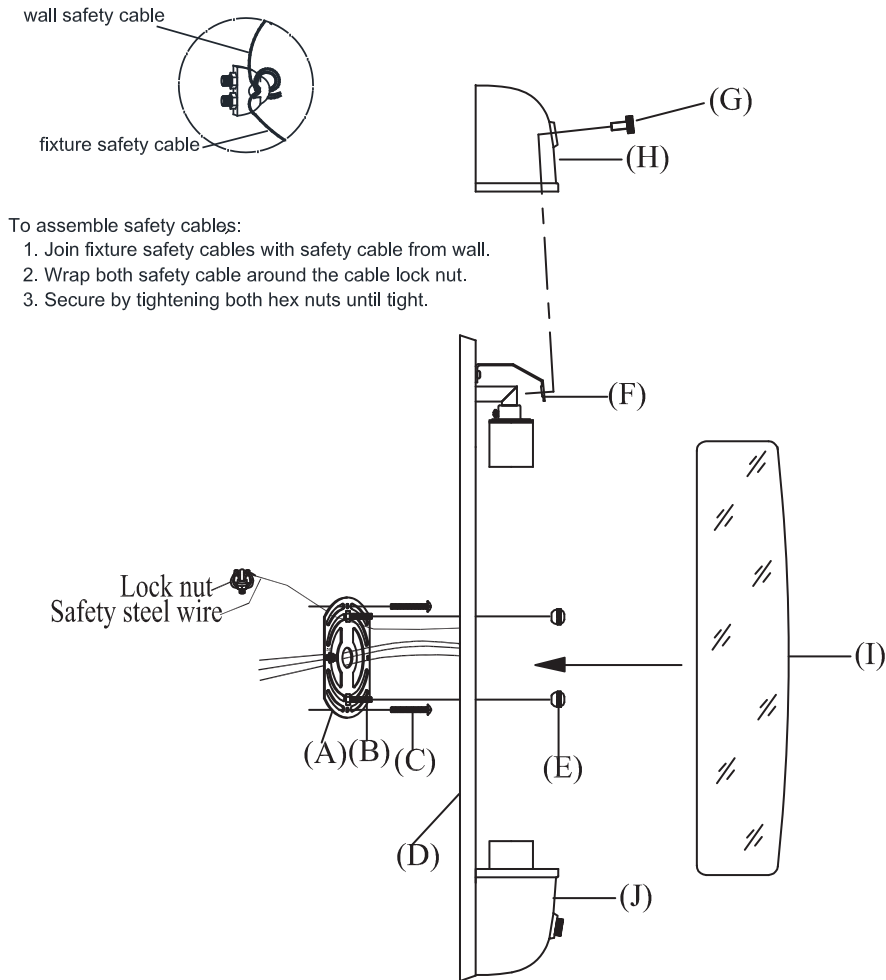

To assemble safety cables:

1. Join fixture safety cables with safety cable from wall.
2. Wrap both safety cable around the cable lock nut.
3. Secure by tightening both hex nuts until tight.

Lock nut  
Safety steel wire