

Hyannis Outdoor Wall

C01364, C01374, C01383, C01392, C01401 | 1.0

GENERATION LIGHTING OUTDOOR

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


CAUTION - RISK OF FIRE
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
 Use minimum 90°c supply conductors.

SAVE THESE INSTRUCTIONS!

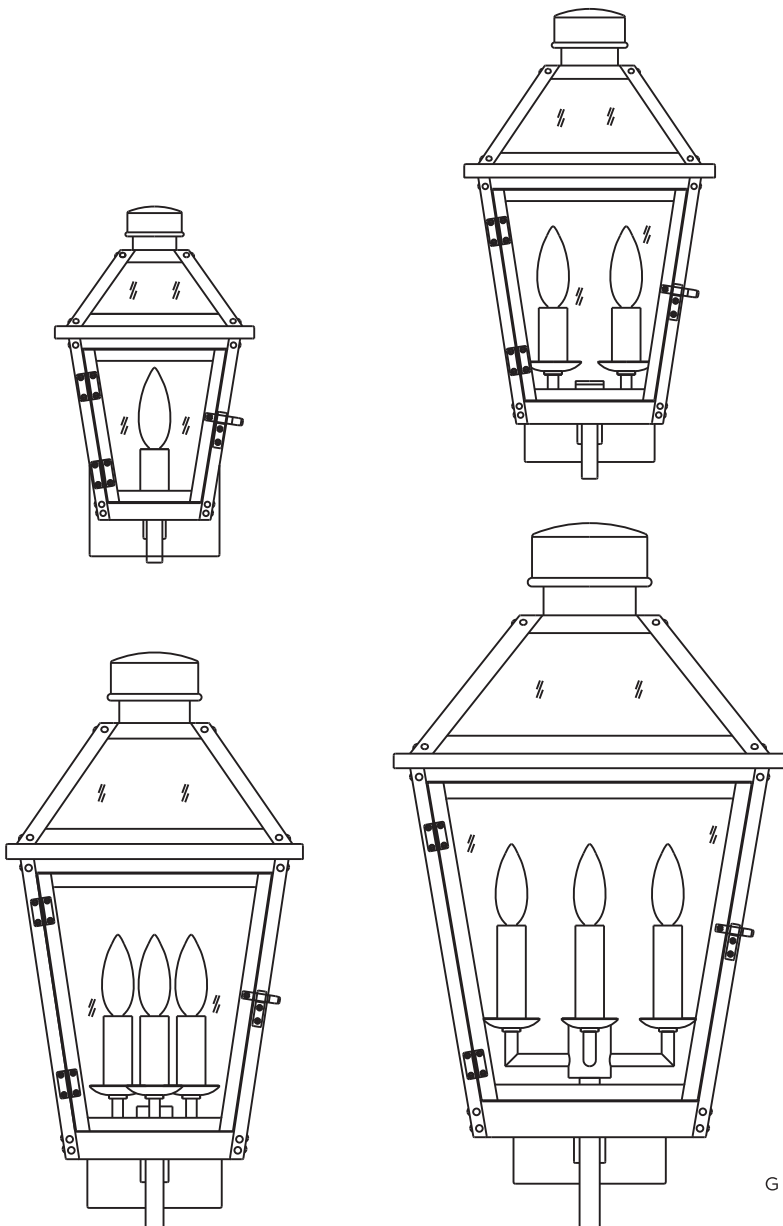

GENERATION LIGHTING
 7400 Linder Ave., Skokie, IL 60077
 T 847.410.4400 | F 847.410.4500
 www.generationlighting.com

Install the Fixture

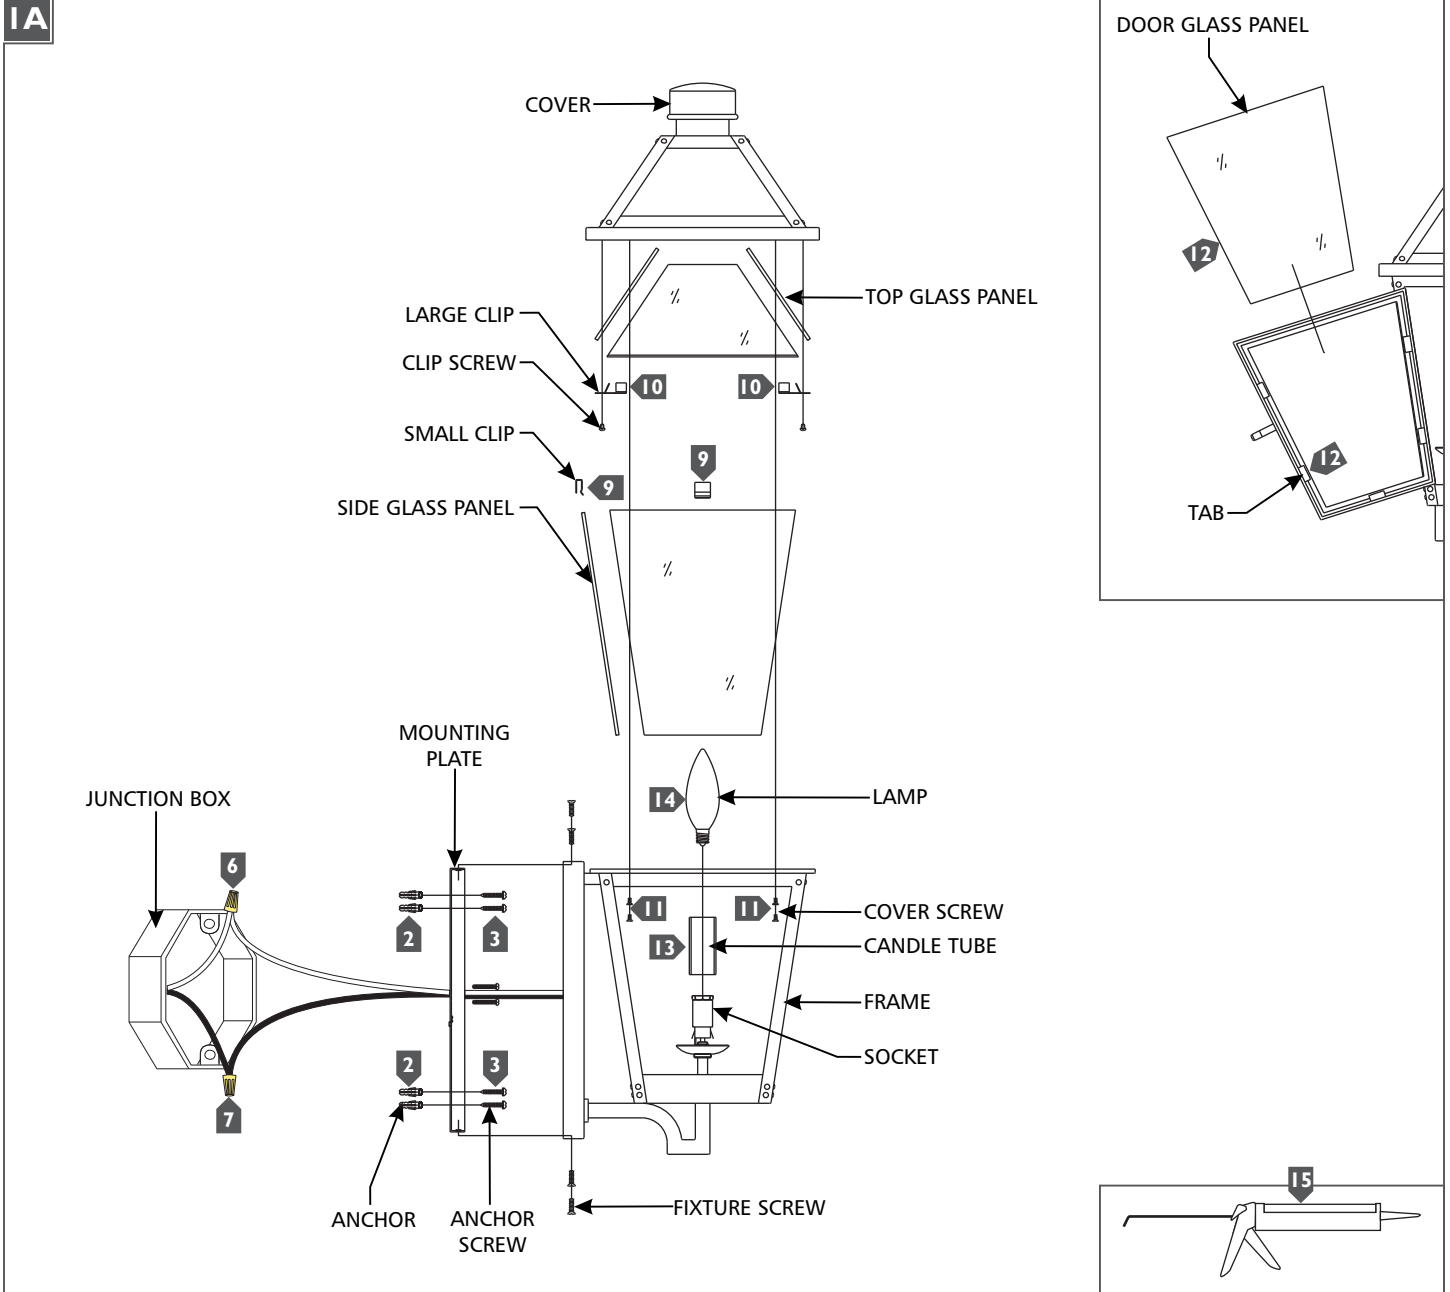

- 1** Temporarily install the mounting plate to the junction box
- 2** Mark the anchor locations through the holes on the mounting plate. Remove the mounting plate.
- 3** Drill appropriate sized holes and install the anchors at the marked locations.
- 4** Secure the mounting plate to the junction box and screw the anchor screws through the anchors.
- 5** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 6** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 7** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 8** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place using the fixture screws.
- 9** Install the side glass panels by carefully inserting them in the frame and securing them using the small clips.
- 10** Install the top glass panels by carefully inserting them in the cover and securing them using the large clips and clip screws.
- 11** Install the cover to the top of the frame using the cover screws.
- 12** Slide the door glass panel into the door frame and secure it in place using the tabs.
- 13** Install the candle tubes by sliding them over the sockets.
- 14** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.
- 15** For wet locations, caulk around the base of the fixture with waterproof construction sealant.