


CLEAN 52" Ceiling Fan
F-003L

WAC FANS LIMITED

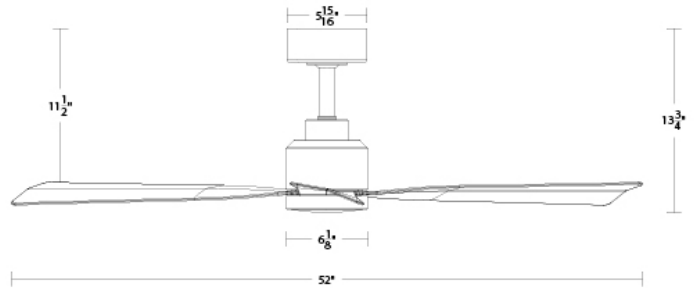

PRODUCT DESCRIPTION

A smart fan with minimalist appeal. It perfectly suits a range of design styles without overpowering. Convenient wall and remote control options provide flexibility and ease of use, while a whisper-quiet and energy-efficient DC motor powers the ABS blades.

SPECIFICATIONS

Construction: Aluminum
Blade: 14° Pitch, 54" sweep, ABS
Downrod: 3/4"W X 6"H included
Mounting Slope: Up to 30°
Wire: 80"
Hanging Weight: 17 lbs
Total Power: 45W
Standards: UL/cUL Wet Location listed, Title 24 Compliant, Title 20 Compliant, Energy Star Rated

FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Includes remote control with wall cradle
- Wall control for 3, 4-way control sold separately
- Compatible with WAC app

LUMINAIRE PERFORMANCE

Light Source: LED
Light Wattage: 13W
Dimming: Integrated
Color Temperature: 3000K
Rated Life: 50,000 Hours

AIRFLOW/ENERGY EFFICIENCY

Airflow CFM: 4039 (weighted-average)/6027 (high)
Energy Use (W): 21 (weighted-average)/30 (high)
Estimated Yearly Energy Cost (\$): 6 (weighted-average)
Efficiency (CFM/W): 188 (weighted-average)/201 (high)

Motor Type

DC125NS sensorless DC motor

ORDER NUMBER

Model	LED Lumens	Delivered Lumens	Housing	Blade
F-003L	1110	376	BA <i>Brushed Aluminum</i>	TT <i>Titanium Silver</i>
			MB <i>Matte Black</i>	MB <i>Matte Black</i>
			MW <i>Matte White</i>	MW <i>Matte White</i>

Example: F-003L-MB

The WAC app synchronizes seamlessly with smart home devices you already own








www.WACLighting.com
 Phone (866) 810.6615
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

OPTIONAL ACCESSORIES

<p>Bluetooth Wall Control</p>  <p>RC20</p>	<p>WT White</p>	<p>Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.</p>
<p>Bluetooth Remote Control</p>  <p>WC20</p>	<p>WT White</p>	<p>Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with WAC Smart Fans. Includes easy-to-install wall cradle and batteries.</p>
<p>Downrod</p>  <p>XF-12 12in XF-18 18in XF-24 24in XF-36 36in XF-48 48in XF-60 60in XF-72 72in</p>	<p>BA Brushed Aluminum BN Brushed Nickel MB Matte Black MW Matte White</p>	<p>All our downrods are 1" O.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.</p>
<p>Downrod Couplers</p>  <p>XF-I</p>	<p>BA Brushed Aluminum BN Brushed Nickel MB Matte Black MW Matte White</p>	<p>Connects two downrods together.</p>
<p>Sloped Ceiling Kit</p>  <p>XF-SCK</p>	<p>BA Brushed Aluminum BN Brushed Nickel MB Matte Black MW Matte White</p>	<p>Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.</p>

Examples: Wall Control - **WC20-WT**, Remote Control - **RC20-WT**, Downrod - **XF-12-BN**, Downrod Coupler - **XF-I-MB**, Sloped Ceiling Kit - **XF-SCK-MW**

SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope Pitch	1/12 pitch	2/12 pitch	3/12 pitch	4/12 pitch	5/12 pitch	6/12 pitch	7/12 pitch	8/12 pitch	9/12 pitch	10/12 pitch	11/12 pitch	12/12 pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire

**Carbon Fiber downrods available in 12", 18", 24" and 36"

†Koa downrods available in 12", 18", 24" and 36"

www.WACLighting.com
Phone (866) 810.6615
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760