


HR3LED118P

3.5" Tesla™ Pro LED Downlight Trim

WAC LIGHTING

Responsible Lighting®

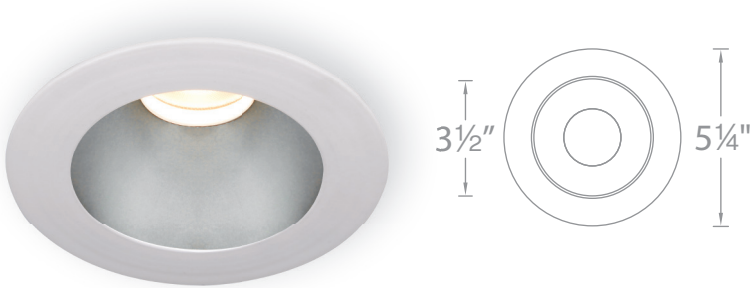

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Minimum profile, round downlight trim with interior open reflector

FEATURES

- 3.5" aperture
- Energy Star® rated
- Damp location listed
- 30° visual cutoff angle for glare control
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

Light Source: Utilizes one 22W LED, CRI: 85 & 90+

Dimming: 0-10V Dimming: 100%-10%
ELV Dimming: 100%-15% (120V only)

Mounting: Three heavy gauge retention clips hold trim firmly to housing.

Finish: White (WT) powder coat paint and electroplated Brushed Nickel (BN) and Copper Bronze (CB).

Standards: ETL & cETL Listed. See table below for Energy Star® qualifying products.

TRIMS

Model#	Beam	Color Temp	CRI	Lumens	CBCP	Energy Star®	Finish
HR3LED118P <i>Open Reflector</i>	N 30°	827 2700K	85	1165	2536	Yes	HBN Haze/Brushed Nickel HCB Haze/Copper Bronze HWT Haze/White BBN Specular Black/Brushed Nickel BCB Specular Black/Copper Bronze BWT Specular Black/White BN Brushed Nickel CB Copper Bronze WT White
		927 2700K	90	970	2130	Yes	
		830 3000K	85	1195	2565	Yes	
		930 3000K	90	1110	2438	Yes	
		835 3500K	85	1325	2907	Yes	
		840 4000K	85	1365	3011	Yes	
	F 55°	827 2700K	85	1130	1389	Yes	
		927 2700K	90	935	1161	Yes	
		830 3000K	85	1174	1436	Yes	
		930 3000K	90	1100	1386	Yes	
		835 3500K	85	1280	1580	Yes	
		840 4000K	85	1335	1634	Yes	

HR3LED118P

Example: HR3LED118PF930BCB

COMPATIBLE HOUSINGS See individual housing spec sheets for complete information.

Model	Input	Notes
HR-3LED-H18D1-ICA	120V -277V	Ceiling thickness: 1/2" - 3/4"
HR-3LED-H18D1-ICAC		
HR-3LED-H18D-ICA	120V -277V	Ceiling thickness: 1/2" - 3/4"
HR-3LED-H18D-ICAC		
HR-3LED-H18D-EMICA		
HR-3LED-H18D-A	120V -277V	Requires 3" of clearance from insulation on all sides
HR-3LED-R18D-A		Ceiling thickness: 1/2" - 1"

REPLACEMENT MODULES

Reflectors

Narrow Flood **SL-REF-BL10-1-N**
Flood **SL-REF-BL10-1-F**

LED

2700K	85 CRI	BXRC-27E1000-B-03
2700K	90 CRI	BXRC-27G1000-B-03
3000K	85 CRI	BXRC-30E1000-B-03
3000K	90 CRI	BXRC-30G1000-B-03
3500K	85 CRI	BXRC-35E1000-B-03
4000K	85 CRI	BXRC-40E1000-B-03

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760