
## Model: H/L/J-LED207

## **AC LED Track Luminaire**

# WAC LIGHTING

## Responsible Lighting®

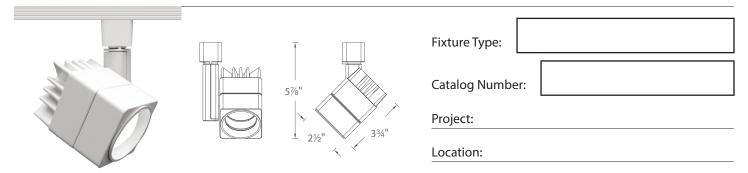

#### **PRODUCT DESCRIPTION**

LED207 track luminaire offers driverless AC LED technology and easy change of beam angles in field. Superior light output in a small, unobtrusive design. The high output LEDs outperform halogen 50W MR16. Developed for upscale residential and commercial environments.

#### **FEATURES**

- · Driverless AC LED technology
- · Compact integrated design
- · Easy change of beam angles in field
- · Outperforms halogen 50W MR16
- · Consistent high quality beam pattern
- · Accommodates 1 lens accessory
- · 360° horizontal and 90° vertical aiming
- · 50,000 hour rated life
- · 5 year WAC Lighting product warranty

#### **SPECIFICATIONS**

Construction: Die-cast aluminum with removable PC lens cap

for easy change of lenses or accessories

Finish: Black (BK) and White (WT) powder coat paint.

**Driver:** Input voltage: 120VAC 50/60Hz. High Voltage AC LED module. **Light Source:** 

Dims to 10%-100% with electronic low voltage (ELV) **Dimming:** 

dimmer. Compatible with LUTRON SELV-300P,

DVELV-300P and LEVITON MLE03-1.


Standards: ETL & cETL Listed. Energy Star Rated.

#### **BEAMSHIFT™TECHNOLOGY**

Flood 40° Configuration

Convex Lens located behind the spacer

LED207 track luminaires come with BeamShift™, allowing in-field change of beam angle simply by changing the location of the lens with a simple flat-head screwdriver.






Front Baffle

Convex Lens located in front of the spacer.

(	ORDER NUMBER											
	Tra	ck System	Model	F	inish	Voltage	Color Temp	Power	CRI	Beam	Lumens	Effic
	Н	H Track	I ED207-30	вк	Black	1201/	3000K	151//	95	25°	540	35.3 L



Example: H-LED207-30-WT

Tra	ack System	Model	F	inish	Voltage	Color Temp	Power	CRI	Beam	Lumens	Efficacy
	H Track	LED207.20	ВК	Black	1201/	20001/	1514/	0.5	25°	540	35.3 Lm/W
J	L Track J/J2 Track	LED207-30	BK WT	White	120V	3000K	15W	85	40°	660	43.7 Lm/W

#### **LENSES & ACCESSORIES**

Model		Color	
		AMB	Amber
		BLU	Blue
LENS-16	Color Lens	GRN	Green
		RED	Red
		YEL	Yellow

**FINISHES** BK WT

Phone (800) 526.2588 • Fax (800) 526.2585



Headquarters/Eastern Distribution Center **Western Distribution Center** 1750 Archibald Avenue • Ontario, CA 91760

**WAC Lighting** www.waclighting.com 44 Harbor Park Drive • Port Washington, NY 11050 Phone (800) 526.2588 • Fax (800) 526.2585 Phone (516) 515.5000 • Fax (516) 515.5050

## **Model: H/L/J-LED207**

## **AC LED Track Luminaire**



Responsible Lighting®

#### **APPLICATION PERFORMANCE - 3000**K



0° Aiming Angle (ceiling to floor)

LED207-30
25° hoam

LED207-3	l
10° hoam	

1	EC	
		40° beam
		LED207-3

	-	25 Dean	ı	-	to bean	1
Distance	FC	L	W	FC	L	W
4 ft	79	1.8	1.8	64	2.9	2.9
6 ft	35	2.7	2.7	28	4.4	4.4
8 ft	20	3.5	3.5	16	5.8	5.8
10 ft	13	4.4	4.4	10	7.3	7.3



45° Aiming Angle (ceiling to wall)

LED207-30
25° beam

LE	D2	07	-3	

		-	_	_
100	Ь.		m	

Distance	FC	L	W
4 ft	28	3.7	2.5
6 ft	12	5.6	3.8
8 ft	7	7.5	5.0
10 ft	4	9.3	6.3

40 Ocum						
FC	L	W				
23	6.7	4.1				
10	10.1	6.2				
6	13.4	8.2				
4	16.8	10.3				

#### **PHOTOMETRY**

