
Model: H/L/J-LED208

AC LED Track Luminaire



Responsible Lighting®

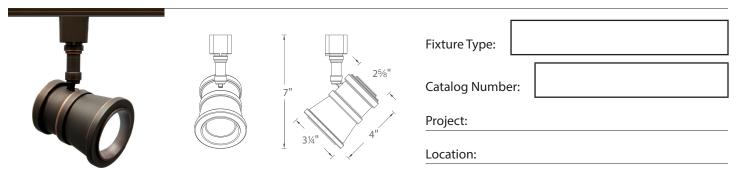

PRODUCT DESCRIPTION

LED208 track luminaire offers driverless AC LED technology and easy change of beam angles in field. Superior light output in a small, unobtrusive design. The high output LEDs outperform halogen 50W MR16. Developed for upscale residential and commercial environments.

FEATURES

- · Driverless AC LED technology
- · Compact integrated design
- · Easy change of beam angles in field
- · Outperforms halogen 50W MR16
- · Consistent high quality beam pattern
- · Accommodates 1 lens accessory
- · 360° horizontal and 90° vertical aiming
- 50,000 hour rated life
- · 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Die-cast aluminum with removable PC lens cap

for easy change of lenses or accessories

Finish: Antique Bronze (AB)

Driver: Input voltage: 120VAC 50/60Hz. **Light Source:** High Voltage AC LED module.

Dimming: Dims to 10%-100% with electronic low voltage (ELV)


 $dimmer. \ Compatible \ with \ LUTRON \ SELV-300P,$


DVELV-300P and LEVITON MLE03-1.

Standards: ETL & cETL Listed. Energy Star Rated.

BEAMSHIFT™TECHNOLOGY

LED208 track luminaires come with BeamShift $^{\text{TM}}$, allowing in-field change of beam angle simply by changing the location of the lens with a simple flat-head screwdriver.






Flood 40° Configuration Convex Lens located behind the spacer

Spot 25° Configuration
Convex Lens located in front of the spacer.

ORDER NUMBER

Tra	ck System	Model	ı	Finish	Voltage	Color Temp	Power	CRI	Beam	Lumens	Efficacy
Н	H Track	LED208-30	AB	Antique	1201/	20001/	1514/	0.5	25°	505	33.7 Lm/W
J	L Track J/J2 Track	LED208-30	AB	Bronze	120V	3000K	15W	85	40°	640	42.7 Lm/W





Example: H-LED208-30-AB

LENSES & ACCESSORIES

Model		Color	
		AMB	Amber
		BLU	Blue
LENS-16	Color Lens	GRN	Green
		RED	Red
		YEL	Yellow

WAC Lighting www.waclighting.com Phone (800) 526.2588 • Fax (800) 526.2585 **Headquarters/Eastern Distribution Center**44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585

Model: H/L/J-LED208

AC LED Track Luminaire



Responsible Lighting®

APPLICATION PERFORMANCE - 3000K

FC

80

35

20

13



4 ft

6 ft

8 ft

10 ft

Distance

0° Aiming Angle (ceiling to floor)

LED208-30
25° heam

		40° beam				
	FC	L				
	67	2.9				
	30	4.4				
	17	5.8	Г			
	11	7.3				



-	25 Deuii	ı	40 060111			
	L	W	FC	L	W	
	1.8	1.8	67	2.9	2.9	
	2.7	2.7	30	4.4	4.4	
	3.5	3.5	17	5.8	5.8	
	4.4	4.4	11	7.3	7.3	



45° Aiming Angle (ceiling to wall)

LED208-30 25° beam

Distance	FC	L	W
4 ft	28	3.7	2.5
6 ft	13	5.6	3.8
8 ft	7	7.5	5.0
10 ft	5	9.3	6.3

LED208-30 40° beam

FC	L	W
24	6.7	4.1
11	10.1	6.2
6	13.4	8.2
4	16.8	10.3

PHOTOMETRY

