
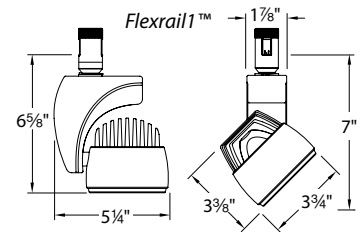
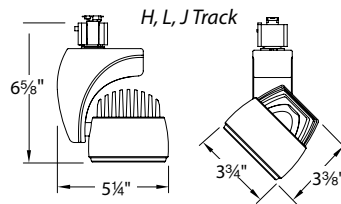


# REFLEX – model: LED27

## LEDme® Track Luminaire

# WAC LIGHTING

Responsible Lighting®

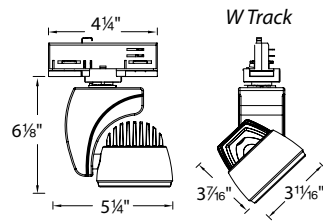

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

High performance and precise thermal management with robust die-cast construction makes this luminaire perfect for general, accent and wall wash applications in residential and commercial environments. For use with WAC Lighting's 120V Track system and compatible with other manufacturer's track (consult factory for specific brands).

### FEATURES

- Energy Star® rated
- Accepts one lens/accessory
- 360° horizontal rotation and 180° vertical aiming
- Free of projected heat, UV and IR radiation
- Replaceable LED module (consult factory)
- Alternate beam angles may be ordered separately
- 100,000 hour rated life
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

**Construction:** Die-cast aluminum.

**Driver:** 120VAC 50/60Hz, 700mA current.  
High power factor >0.9. Max Load: 27W.

**Dimming:** No

**Light Source:** High output LED.

**Finish:** Black (BK), Dark Bronze (DB), Platinum (PT) and White (WT) powder coat paint.

**Standards:** ETL & cETL Listed.

### FIXTURE PERFORMANCE

Model #	Beam	Voltage	Color Temp	Power	Lumens	Efficacy	CBCP	CRI
<b>LED27S-27</b>	20°	120V	2700K	27W	1530	57 Lm/W	5870	85
<b>LED27F-27</b>	40°				1420	53 Lm/W	1885	
<b>LED27S-30</b>	20°	120V	3000K	27W	1830	68 Lm/W	5555	85
<b>LED27F-30</b>	40°				1470	55 Lm/W	1820	
<b>LED27S-35</b>	20°	120V	3500K	27W	1855	69 Lm/W	7455	85
<b>LED27F-35</b>	40°				1670	62 Lm/W	2230	
<b>LED27S-40</b>	20°	120V	4000K	27W	1890	70 Lm/W	7120	85
<b>LED27F-40</b>	40°				1725	64 Lm/W	2240	
<b>LED27S-27</b>	20°	277V	2700K	27W	1530	57 Lm/W	5870	85
<b>LED27F-27</b>	40°				1420	53 Lm/W	1885	
<b>LED27S-30</b>	20°	277V	3000K	27W	1830	68 Lm/W	5555	85
<b>LED27F-30</b>	40°				1470	55 Lm/W	1820	
<b>LED27S-35</b>	20°	277V	3500K	27W	1855	69 Lm/W	7455	85
<b>LED27F-35</b>	40°				1670	62 Lm/W	2230	
<b>LED27S-40</b>	20°	277V	4000K	27W	1890	70 Lm/W	7120	85
<b>LED27F-40</b>	40°				1725	64 Lm/W	2240	

### ORDER NUMBER

Track System	Model	Watt	Beam	Color Temp	Finish
<b>H</b> H Track	<b>LED27</b>	27W	<b>S</b> 20°	<b>27</b> 2700K	<b>BK</b> Black
<b>L</b> L Track				<b>30</b> 3000K	<b>WT</b> White
<b>J</b> J/J2 Track				<b>35</b> 3500K	<b>PT</b> Platinum
<b>WTK</b> W Track 120V	<b>LED27</b>	27W	<b>F</b> 45°	<b>30</b> 3000K	<b>BK</b> Black
<b>WHK</b> W Track 277V				<b>35</b> 3500K	<b>PT</b> Platinum
				<b>40</b> 4000K	<b>WT</b> White
<b>HM1</b> Flexrail™					<b>DB</b> Dark Bronze
					<b>PT</b> Platinum

### LENSES & ACCESSORIES

Model	Color	Model	Finish
<b>LENS-25</b> Color Lens	<b>AMB</b> Amber	<b>FR</b>	Frosted Lens
	<b>BLU</b> Blue		
	<b>GRN</b> Green		
	<b>RED</b> Red		
	<b>YEL</b> Yellow		
		<b>SPR</b>	Spread Lens
		<b>BEL</b>	Beam Elongating Lens

- **LED27**  -  -

Example: **WHK-LED27F-35-WT**

### WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

### Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

### Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585