


# CARTIER – model: LED710

## LEDme® Track Luminaire

# WAC LIGHTING

Responsible Lighting®

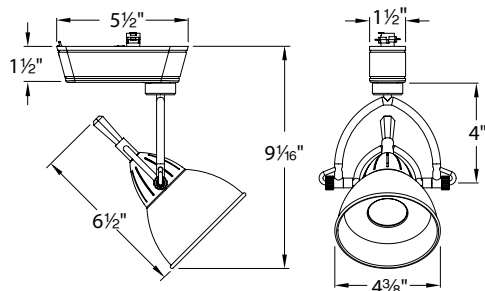

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

High-level craftsmanship and old world styling are combined with the flexibility and performance of modern track lighting.

Precision engineering, hand finishes and onyx crystal details make this fixture perfect for upscale spaces with sophisticated taste.

For use with WAC Lighting's 120V Track system and compatible with other manufacturer's track (consult factory for specific brands).

### FEATURES

- Meets 2013 California Title 24 Efficiency
- Smooth and continuous ELV dimming
- ANSI Compliant Warm/Neutral LED Bins for a finer color consistency
- Replaceable LED module and reflectors
- 60,000 hour rated life
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

**Construction:** Spun aluminum body with black onyx crystal aiming finial and clear lens.

**Driver:** Input voltage: 120VAC/60Hz; High power factor >0.9  
Max Load: 10W

**Light Source:** 10W Cree Multi-chip LED.

Total power consumption of 14W with included driver.

**Dimming:** May be dimmed to 8% with electronic low voltage (ELV) dimmer.

**Finish:** White powder coat inside/electroplated outside.  
Available in Antique Bronze (AB) and Antique Nickel (AN).


**Standards:** UL & CUL Listed. Meets Energy Star Requirements.

### FIXTURE PERFORMANCE

Model #	Beam	Color Temp	Watts	Lumens	Efficacy	CBCP	CRI
<b>LED710S-927</b>	20°	2700K	14.5W	745	51 Lm/W	3556	90
<b>LED710F-927</b>	32°	2700K	14.5W	690	48 Lm/W	1456	90
<b>LED710S-27</b>	20°	2700K	14.5W	900	62 Lm/W	4220	80
<b>LED710F-27</b>	32°	2700K	14.5W	895	62 Lm/W	1957	80
<b>LED710S-9W</b>	20°	3000K	14.5W	765	53 Lm/W	3650	90
<b>LED710F-9W</b>	32°	3000K	14.5W	690	48 Lm/W	1462	90
<b>LED710S-WW</b>	20°	3000K	14.5W	1000	69 Lm/W	4659	80
<b>LED710F-WW</b>	32°	3000K	14.5W	935	64 Lm/W	1954	80
<b>LED710S-35</b>	20°	3500K	14.5W	990	68 Lm/W	4512	80
<b>LED710F-35</b>	32°	3500K	14.5W	935	64 Lm/W	2114	80
<b>LED710S-CW</b>	20°	4000K	14.5W	1035	71 Lm/W	4811	80
<b>LED710F-CW</b>	32°	4000K	14.5W	940	65 Lm/W	2006	80

### ORDER NUMBER

System	Model #	Beam Spread	Color Temp	Finish
L L Track	<b>LED710</b>	S 20°	<b>927</b> 2700K (90 CRI)	<b>AB</b> Antique Bronze <b>AN</b> Antique Nickel
H H Track			<b>27</b> 2700K	
J J Track		F 32°	<b>9W</b> 3000K (90 CRI)	
			<b>WW</b> 3000K	
		<b>35</b> 3500K		
		<b>CW</b> 4000K		



Example: L-LED710S-WW-AN

### REPLACEMENT MODULE

<b>BXRC-27G1000</b>	2700K (90 CRI)
<b>BXRC-27E1000</b>	2700K
<b>BXRC-30G1000</b>	3000K (90 CRI)
<b>BXRC-30E1000</b>	3000K
<b>BXRC-35E1000</b>	3500K
<b>BXRC-40E1000</b>	4000K

### INTERCHANGEABLE BEAM REFLECTORS

<b>RF-S</b>	20°
<b>RF-F</b>	40°

### WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

### Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

### Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585