## 3.5" OCULUX ARCHITECTURAL

Housing - R3CRN-11, R3CSN-11

## SPECIFICATIONS


Input:	Universal 120 - 277V AC 50/60 Hz
Standards:	UL&cUL, IC-rated, Airtight
Dimming:	100% - 1% TRIAC, ELV 100% - 5%, 0-10V
Mounting:	New construction housings included with hanger bars Ceiling cut out (Round): Ø 4 1/4" Ceiling cut out (Square): 4 1/4" x 4 1/4" Ceiling thickness: $1/2$ " - 1"
<b>Construction:</b>	20 Gauge cold rolled steel

VAC LIGHTING	
Responsible Lighting®	

Fixture Type: Catalog Number: Project:

Location:

**Warranty:** 5 year WAC Lighting product warranty

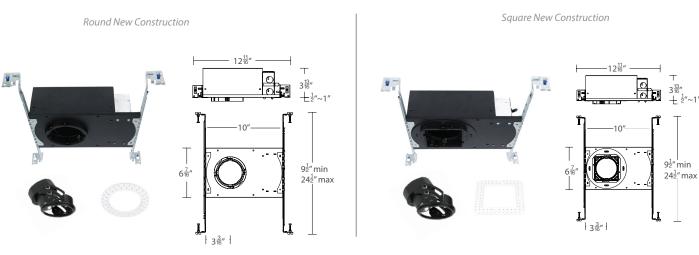

## HOUSINGS

	Model	Power	CRI (90) CCT	Compatible Trims
Round New Construction	R3CRN	11	927 930 935 940	R3CRDT, R3CRPT, R3CRWT, R3CRDL, R3CRPL, R3CRWL
Square New Construction	R3CSN	11	927 930 935 940	R3CSDT, R3CSPT, R3CSWT, R3CSDL, R3CSPL, R3CSWL

## **R3C\_\_\_N-11-**Example: **R3CRN-11-927**

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 **Central Distribution Center** 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. AUG 2018