


# GEMINI

## LED Tape

# WAC LIMITED

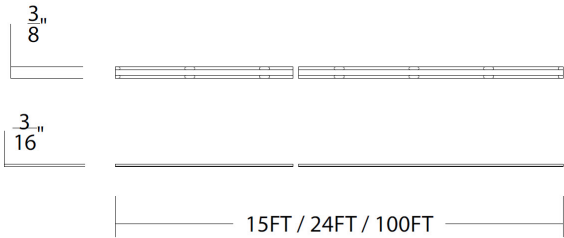

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

The flexible, customizable, uniform illumination, with the lowest profile. Gemini LED Tape delivers seamless line of light and performance with premium light quality without the need for additional diffused covers or accessories. Strong 3M adhesive bond for easy installation. Cuttable and scalable to 24 foot lengths.

### FEATURES

- Damp location listed
- Title 24 Compliant
- UL/cUL listed
- Uniform illumination
- Seamless line of light, no glaring LED spot"
- Available in convenient spools up to 100ft
- Cut and securely reconnect with ease
- May be cut every 2 inches
- Good color rendering
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

<b>Construction:</b>	Flexible strip light
<b>Cutting Interval:</b>	2"
<b>Input:</b>	24VDC
<b>Lumens:</b>	300 lm/ft
<b>Max Run:</b>	Refer to ordering table
<b>CRI:</b>	90
<b>McAdams Steps:</b>	3
<b>Color Temp:</b>	2700K / 3000K / 3500K / 4000K / 5000K
<b>Rated Life:</b>	50,000 hours
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	UL & cUL listed, Damp Location listed, Title 24 Compliant
<b>Max Run:</b>	

Total Length of Lead Wire Between Power Supply to Gemini 300 Tape	Max Run Length	
	60W	96W
6FT (Comes Standard with Power Supply)	15FT	24FT
12FT	15FT	24FT
18FT	15FT	17FT
24FT	12FT	12FT
30FT	10FT	10FT
40FT	7FT	7FT

### ORDER NUMBER - TAPE SELECTION

System	Max Run	Power	Length	Color Temp	Color
<b>T24-GE3</b>	300 lm/ft (Refer to above table)	3W/ft	<b>15</b> 15 ft spool (includes 2pcs T24-BS-MM-CL)	<b>27</b> 2700K	<b>WT</b>
			<b>24</b> 40 ft spool (includes 4pcs T24-BS-MM-CL)	<b>30</b> 3000K	
			<b>100</b> 100 ft spool (includes 10pcs T24-BS-MM-CL)	<b>35</b> 3500K	
				<b>40</b> 4000K	

### T24-GE3-\_\_\_\_-\_\_\_\_WT

Example: **T24-GE3-24-30WT**

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122



Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

# GEMINI










## Power Supplies and Accessories

# WAC LIMITED

### Class 2 Power Supply (Required)

	Model	Input	Output	Dimming	
	<b>EN-BT60-24</b>	120VAC	24VDC 60W	ELV 100% - 10%	6 1/2" x 2 1/16" x 1 1/4" 6 ft. Output lead wires
	<b>EN-BT96-24</b>	120VAC	24VDC 96W	ELV 100% - 10%	
	<b>PS-24DC-U60R-BT</b>	120V-277VAC	24VDC 60W	ELV/ TRIAC	6 13/16" x 3 5/8" x 1"
	<b>PS-24DC-U96R-BT</b>	120V-277VAC	24VDC 96W	ELV/ TRIAC	

### Accessories

Tape to Tape Connector		<b>T24-BS-MM-CL</b>	10 pcs	Clear	Connects tape sections
Tape to Tape Corner Connector		<b>T24-BS-L-CL</b>	2 pcs	Clear	Connects tape sections
Power to Tape Connector		<b>T24-BS-PM-CL</b>	10 pcs	Clear	Connects power feed to tape section
Flex Y Connector		<b>T24-BS-Y-WT</b> <b>T24-BS-Y-BK</b>	1 pc	White Black	Connects tape sections and power feed, Includes LED-T-B
Flex X Connector		<b>T24-BS-X-WT</b> <b>T24-BS-X-BK</b>	1 pc	White Black	Connects tape sections and power feed, Includes LED-T-B
Low Voltage Wiring Box		<b>LED-T-B</b>		White	Neatly house connections for up to 2 wires
Joiner Cable		<b>T24-BS-IC-002</b> <b>T24-BS-IC-006</b> <b>T24-BS-IC-012</b> <b>T24-BS-IC-036</b> <b>T24-BS-IC-072</b>	2 inches 6 inches 1 foot 3 feet 6 feet	<b>-WT</b> White <b>-BK</b> Black	Extends distance between tape sections
Extension Cable		<b>T24-BS-EX2-072</b> <b>T24-BS-EX2-144</b> <b>T24-BS-EX2-240</b> <b>T24-BS-EX2-480</b>	6 feet 12 feet 20 feet 40 feet	<b>-WT</b> White <b>-BK</b> Black	Extends distance between tape sections and power supply (Includes a LED-T-B & screw driver)
Plastic Mounting Clip		<b>T24-BS-CL1</b>	10 pcs	Clear	For installation on non-flat surfaces