


Assembly and Installation Instructions for Model's

50060-10DW

Warning please make sure the electrical breaker is shut off before commencing with this installation

CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

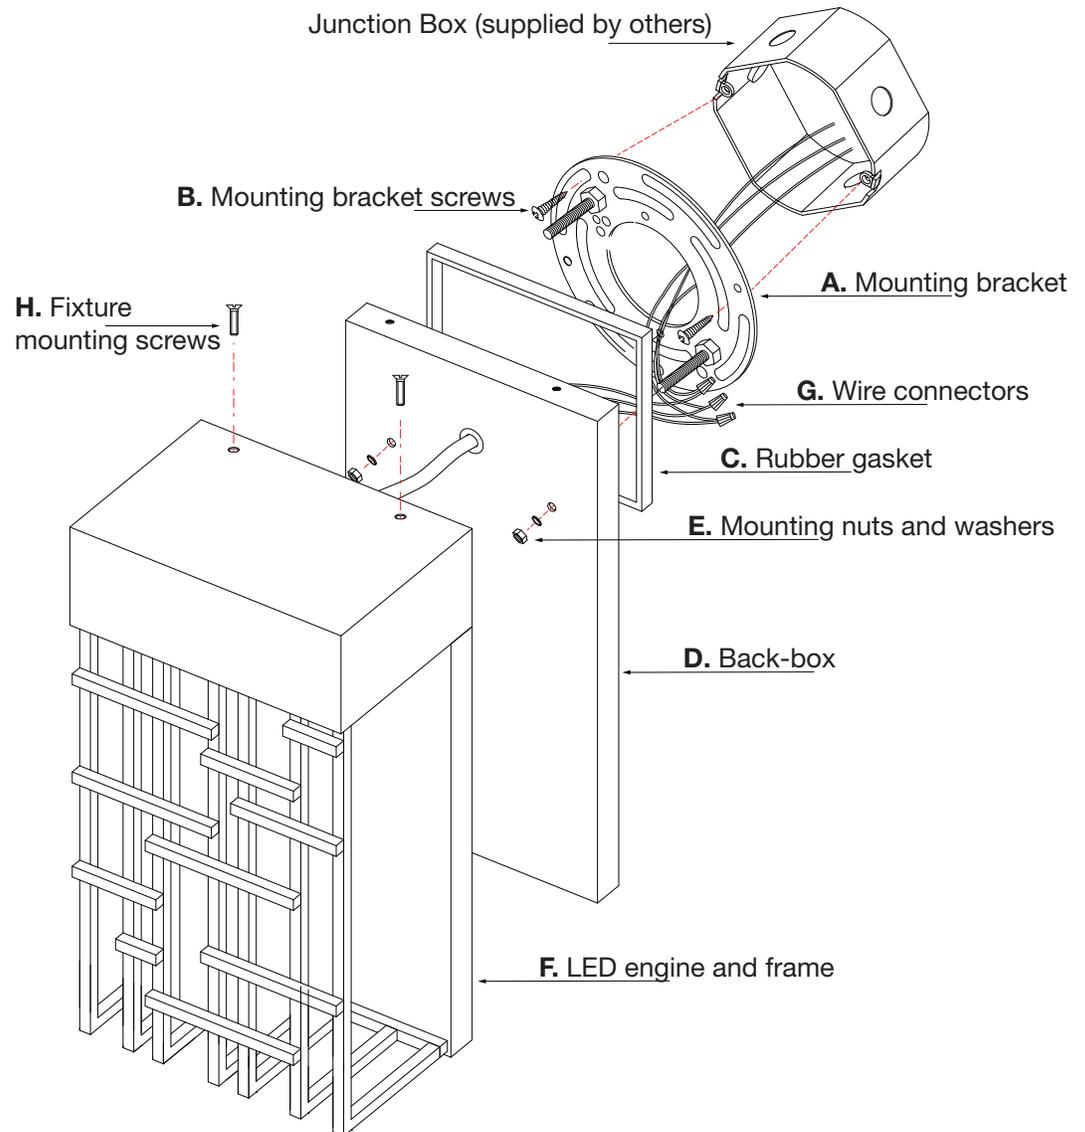

Package Contents		
Part	Description	Qty
A	Mounting bracket	1
B	Bracket screws	2
C	Rubber gasket	1
D	Back-box	1
E	Mounting nuts and washers	2
F	Led engine and frame	1
G	Wire connectors	3
H	Fixture mounting screws	2

Installing the fixture *please ensure the electrical breaker is switched off before commencing*

- 1 Attach the supplied Mounting bracket (A) to the Junction-Box, secure in place with the two supplied Bracket screws (B) and attach the Rubber gasket (C) to the rear of the Back-box (D).
- 2 Connect the supply wires to the White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire using the supplied Wire connectors (G). Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
- 3 Insert the Threaded bolts from the Mounting bracket (A) through the Back-box (D) and secure with supplied Mounting nuts and washers (E).
- 4 Attach the Led engine and frame (F) to the Back-box with the Fixture mounting screws (H).
- 5 Switch on the electrical breaker switch and your new fixture is ready for many years of trouble free use.