

# IN11028

## INSTALLATION INSTRUCTIONS

1500 Cherokee Parkway, Suite 100, Acworth, GA 30102  
Phone: (866) 845-5451 • Fax: (866) 816-6165  
E: [service@acclaim-lighting.com](mailto:service@acclaim-lighting.com) • [www.acclaim-lighting.com](http://www.acclaim-lighting.com)

**ACCLAIM**  
LIGHTING  
INTERIOR • OUTDOOR

Please read carefully and save these instructions, as you may need them at a later date.

### CAUTION

**WARNING:** Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.  
Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

### GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

### ASSEMBLY AND INSTALLATION

1. Adjust arms to proper position (see Fig. 1)
2. Align holes on L shape metal (22) to the holes underneath lower lamp body (21), then use Allen screw (17) to lock
3. Take nipple (10) from parts bag and screw in collar loop (12), and screw nipple (10) into mounting bar (8)
4. Attach mounting bar (8) to outlet box with box screws (9)
5. Unscrew the threaded ring from collar loop (12), take canopy (11) and pass over collar loop (12)
6. After desired position is found, tighten nipple (10) onto collar loop (12) and tighten hex nut (6) against mounting bar (8)
7. Slip canopy (11) over collar loop (12) and thread on threaded ring. Attach chain (14) and chain lock (13) with fixture connected to bottom of collar loop (12). Unscrew the threaded ring, let canopy (11) and threaded ring slip down
8. Pass lead wire and ground wire through chain links no more than 3 inches apart, then pass wires through threaded ring, canopy (11), collar loop (12), nipple (10), and into outlet box (1)
9. Pull out the outlet wire and ground wire from the outlet box (1). Make wire connections  
--Ribbed wire (w/o marking) from light to White wire (2) from power source  
--Smooth wire (w/o marking) from light to Black wire (3) from power source  
--Loop the ground wire (4) to mounting bar (8) with a ground screw (7)
10. Raise canopy (11) to ceiling, verify all wires are securely inside canopy (11), then secure canopy (11) in place by tightening threaded ring onto collar loop (12)
11. Put candle sleeves (19) onto socket (20)
12. Install crystal drop (16) into proper position (refer to line drawing on the right)

INSTALLATION IS NOW COMPLETE

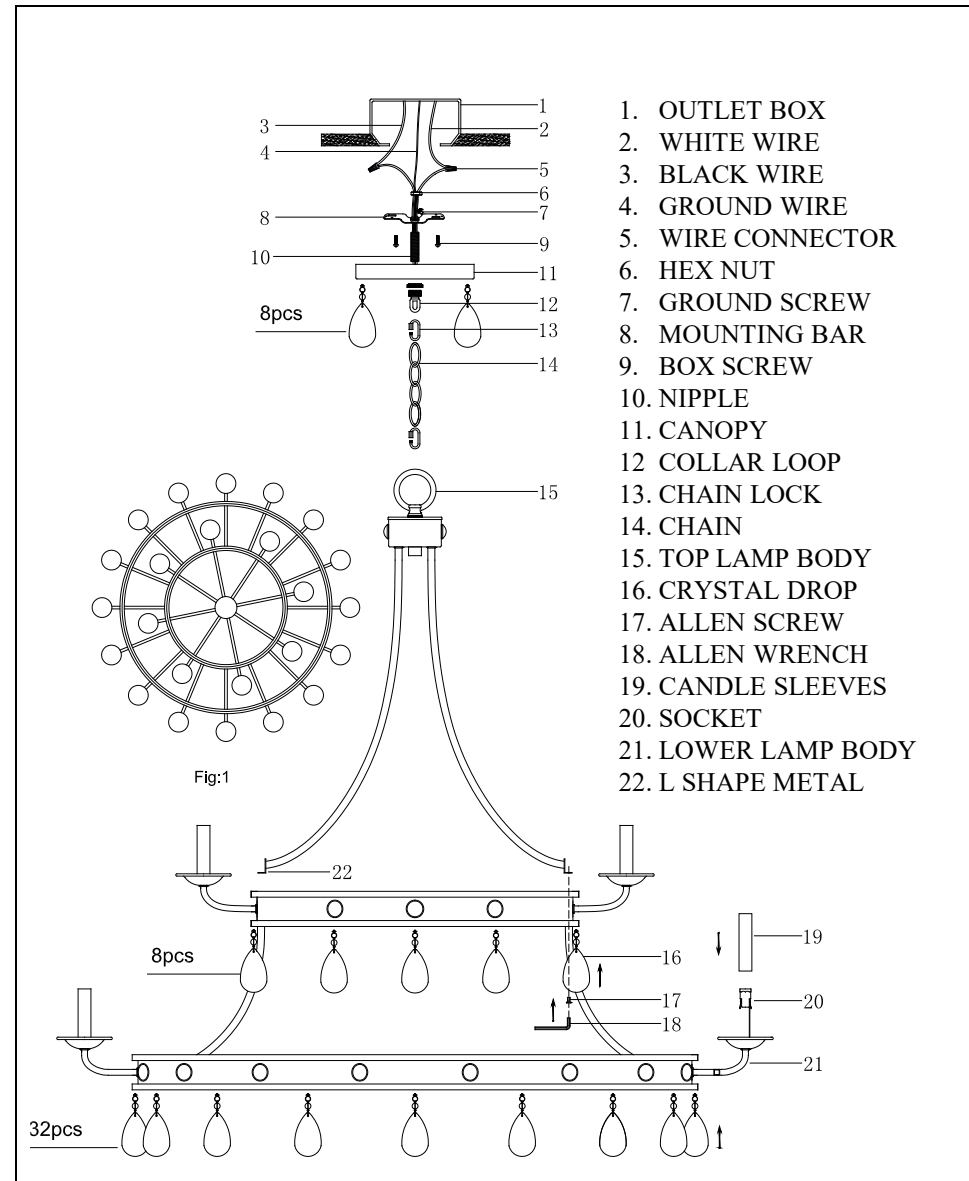

# INSTALLATION INSTRUCTION

## For Safety Cable Installation

(For fixtures over 50 lbs)

This fixture is provided with a Safety Cable, the Safety Cable provides a back up system of the fixture's frame and the installation hardware. It is essential that the Safety Cable be properly installed. The cable must be secured to a STRUCTURAL MEMBER of the building, and not to the outlet box. The Cable must be terminated with CLAMP'S specifically sized for the Cable. If the U-Clamps are used, they must be orientated as per the drawing below. If the Cable has a plastic covering, it must be removed from the area where the clamps are mounted. Make sure all hardware is properly tightened and that the cable is positioned clear of any obstructions.

## CORRECT APPLICATION

