

1500 Cherokee Parkway, Suite 100, Acworth, GA 30102

Phone: (866) 845-5451 • Fax: (866) 816-6165

Email: service@acclaim-lighting.com • www.acclaim-lighting.com

IN11060SN INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

- 1. Connect the tubes (20) to the top loops (19) and bottom loops (21).
- 2. Screw the loop (17) to the nipple (18).
- 3. Attach open chain link (13) to the chain (14) and loop (17), then attach open chain link (13) and screw collar loop (12). Close the open chain link (13).
- 4. Pull out the outlet wire and ground wire from the outlet box (1). Make wire connections.
 - --Ribbed wire (w/o marking) from light to white wire (2) from power source.
- --Smooth wire (w/o marking) from light to black wire (3) from power source.
- --Loop the ground wire (4) to mounting crossbar (6) with a ground screw (7).
- 5. Secure the mounting crossbar (6) with mounting screw (8) to the outlet box (1). Thread hex nut (10) onto nipple (11), Insert lock washer (9) and thread the nipple (11) into the mounting crossbar. Secure with the hex nut (10).
- 6. Slide screw collar loop (12) over canopy (15), then thread screw collar loop (12) into the threaded ring (16) and screw collar loop (12) onto nipple (11). Secure threaded ring (16).
- 7. Install bulbs: (not included)

(Do not exceed maximum wattage recommended on the sockets).

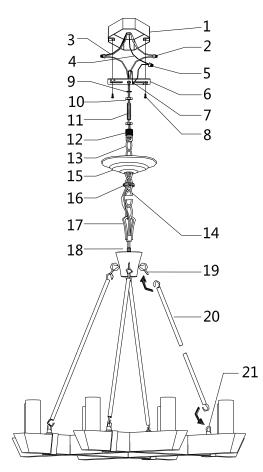

- 1. OUTLET BOX
- 2. WHITE WIRE
- 3. BLACK WIRE
- 4. GROUND WIRE
- 5. WIRE CONNECTOR
- 6. MOUNTING CROSSBAR
- 7. GROUND SCREW
- 8. MOUNTING SCREW
- 9. LOCK WASHER
- 10. HEX NUT
- 11. NIPPLE
- 12. SCREW COLLAR LOOP
- 13. OPEN CHAIN LINK
- 14. OPEN CHAIN
- 15. CANOPY
- 16. THREADED RING
- 17. LOOP
- 21 18. NIPPLE
 - 19. TOP LOOP
 - 20. TUBE
 - 21. BOTTOM LOOP

INSTALLATION IS NOW COMPLETED