

1500 Cherokee Parkway, Suite 100, Acworth, GA 30102

P: 866-845-5451 • F: 866-816-6165

E: service@acclaim-lighting.com • www.acclaim-lighting.com

# IN41280 INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

#### **CAUTION**

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.


### **GENERAL**

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

## **ASSEMBLY AND INSTALLATION**

- 1. Secure the cross bar (6) with mounting screw (8) to the outlet box (1). Thread hex nut (10) onto nipple (11), Insert lock washer (9) and thread the nipple (11) into the cross bar.
- 2. Pull out the outlet wire and ground wire from the outlet box (1). Make wire connections.
- --Ribbed wire (w/o marking) from light to White wire (2) from power source.
- --Smooth wire (w/o marking) from light to Black wire (3) from power source.
- --Loop the ground wire (4) to cross bar (6) with a ground screw (7).
- 3. Position the back plate (12) allowing for nipple (11) to protrude through the hole. Secure with the finial (14).
- 4. Place the shade (15) and check ring (16) over the socket (13) and use wrench (18) to secure the socket ring (17).
- 5. Install bulbs: (bulbs not included)
- (Do not exceed the maximum capacity recommended on the sockets).

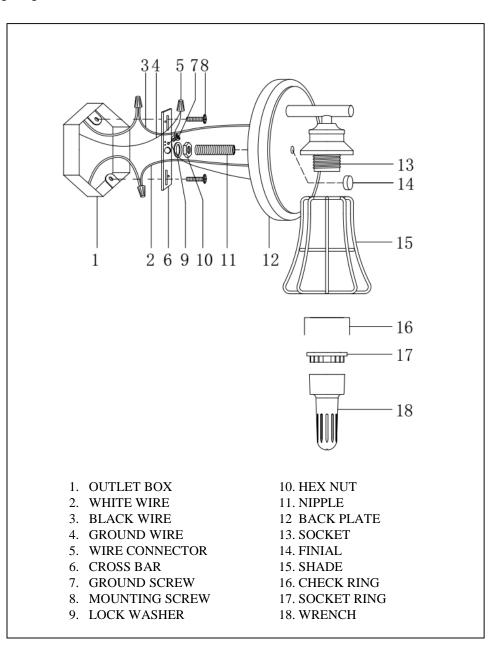

### INSTALLATION IS NOW COMPLETE