

TP20050BR INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.


GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

- 1. Pass the wire through the stem(17) and attach it to the socket assembly(18).
- 2. Put the remaining stems(14, 15, 16,) and swivel(13) together in the same way.
- 3. Put the canopy(11) over the swivel and lock it with the butterfly nuts.
- 4. Secure the mounting bar(8) with box screws(6) to the junction box(1).
- 5. Pull out the outlet wire and ground wire from the junction box. Make wire connections with Wire Connector(2).
 - Black wire from light to Black wire (3) from power source.
 - --White wire from light to White wire(4) from power source.
 - --Loop the ground wire(5) to mounting bar(8) and secure with a ground screw(9).
 - 6. Attach the canopy(11) to the junction box(1) using the ball nuts(12) and mounting screws(7).
 - 7. Put the glass shade (19) over the socket and tighten it with the ring(20) .
 - 8. Install the bulb (21, not included) into the sockets.

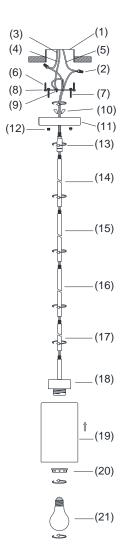

- 1. JUNCTION BOX
- 2. WIRE CONNECTOR
- 3. BLACK WIRE
- 4. WHITE WIRE
- 5. GROUND WIRE
- 6. BOX SCREW
- 7. MOUNTING SCREW
- 8. MOUNTING BAR
- 9. GROUND SCREW
- 10. BUTTERFLY
- 11. CANOPY
- 12. BALL NUT
- 13. SWIVEL
- 14. STEM
- 15. STEM
- 16. STEM
- 17. STEM
- 18. SOCKET ASSEMBLY
- 19. GLASS SHADE
- 20. RING
- 21. BULB