



CIRRUS

SCONCES OUTDOOR



SPECIFICATIONS:

DESCRIPTION

Wall-mounted **ADA-compliant** sconce featuring handcrafted glass diffuser is enclosed on top to conceal lamp if viewed from above.

LAMPING

Standard: 75W A19 120V incandescent, suitable for dimming.

CFL: 18W 4-Pin CFL with non-dimming electronic ballast. 120V, lamp not included.

LED: 7W LED Replaceable source 120V, non-dimmable, included.

DIFFUSER

Diffuser shall be handcrafted Opal Matte glass.

CONSTRUCTION


Half circle shaped, stamped aluminum fitter (9" L x 4.625" H x 0.75" D) is powder coated white. Glass secured by stainless steel set screws.

MOUNTING

Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lamping. Fixture is centered on the outlet box.

LABELS

UL or ETL Listed. Suitable for Wet Locations (interior or exterior use).

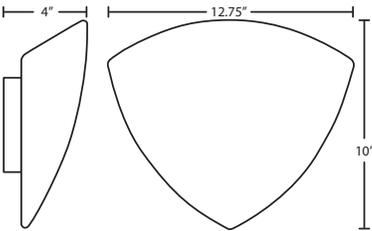

CIRRUS SHOWN IN OPAL MATTE (297107)



Profile

ORDERING:

FIXTURE	LAMP OPTIONS
297107 Opal Matte	(blank) 1x 75W A19 Incan
	E1 1x 18W Quad 120V
	LED 1x 7W LED 120V, non-dimmable

Ex. 297107
1 Lt. Cirrus Sconce w/ Opal Matte Glass,
White Finish

LED SCONCES:

- Total power of only 7 watts
- Non-dimmable
- Rated life: 30,000 hours
- 500 lumens
- CCT: 3000° Kelvin
- CRI: 80+

Project Information:

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.