



PLATINUM SMART-HEAT™ ELECTRIC


PLATINUM SMART-HEAT™ ELECTRIC

Available in black and white, our Platinum Smart-Heat™
Electric heater is specifically suited for low-clearance
and design-focused spaces. This slim-line, stainless-steel unit
spreads comfort evenly in its space, all while minimizing light
emission and blending seamlessly into the background with
our recess mounting solutions.



BRÓMIC

2300W, 3400W & 4500W SERIES



2300W, 3400W & 4500W SERIES
BLACK | WHITE





PLATINUM **SMART-HEAT** ELECTRIC


MODEL NUMBER	2300W SERIES	3400W SERIES	4500W SERIES
PRODUCT CODES PLATINUM ELECTRIC	BH0320003 BH0320007 BH0320019 BH0320020	BH0320005 BH0320008 BH0320021 BH0320022	BH3622000 BH3622004 BH3622001 BH3622005
PRODUCT CODES PLATINUM ELECTRIC MARINE	BH0320015 BH0320017 BH0320023 BH0320024	BH0320016 BH0320018 BH0320025 BH0320026	BH3622002 BH3622006 BH3622003 BH3622007
FUEL TYPE	ELECTRIC	ELECTRIC	ELECTRIC
COLOR	BLACK WHITE	BLACK WHITE	BLACK WHITE
HEAT AREA	65FT ²	108FT ²	143FT ²
RATED CURRENT**	220 - 240V/9.6A 208V/11.1A	220 - 240V/14.2A 208V/16.3A	220 - 240V/18.8A 208V/21.6A
MINIMUM FLOOR CLEARANCE	WALL 72" CEILING 96"	WALL 72" CEILING 96"	WALL 72" CEILING 96"
MOUNTING OPTIONS			
CEILING MOUNT	INCLUDED	INCLUDED	INCLUDED
WALL MOUNT	INCLUDED	INCLUDED	INCLUDED
RECESS KIT FLUSH MOUNT	✓	✓	✓
CEILING RECESS KIT PRODUCT CODES	BH3130017	BH3130027	BH3623000
NEW RECESS KIT LOW CLEARANCE	✓	✓	✓
LOW CLEARANCE RECESS KIT PRODUCT CODES	BH3623009	BH3623008	BH3623012
CEILING POLE EXTENSION	✓	✓	✓
CEILING POLE (2') PRODUCT CODE	BH3130023-1	BH3130023-1	BH3623020
CEILING POLE (4') PRODUCT CODE	BH3130024-1	BH3130024-1	BH3623021
FREESTANDING	-	-	-
CONTROL OPTIONS			
ON OFF	✓	✓	✓
ON OFF PRODUCT CODE	BH3130010-2	BH3130010-2	BH3130010-2
DIMMER	✓	✓	✓
DIMMER PRODUCT CODE	BH3130011-2	BH3130011-2	BH3130011-2
MASTER REMOTE *	✓	✓	✓
MASTER REMOTE PRODUCT CODE	BH3130012-2	BH3130012-2	BH3130012-2


^{*} Control up to six zones of heaters with unlimited heaters per zone from a single remote control. Dimmer control required. Works with dimming controllers. Remote control operates within 100ft of heaters.


Measurements displayed within this document are for reference only, for complete requirements see the installation/user manual. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this document are displayed in inches.

WALL BRACKET (INCLUDED)

CEILING BRACKET (INCLUDED)






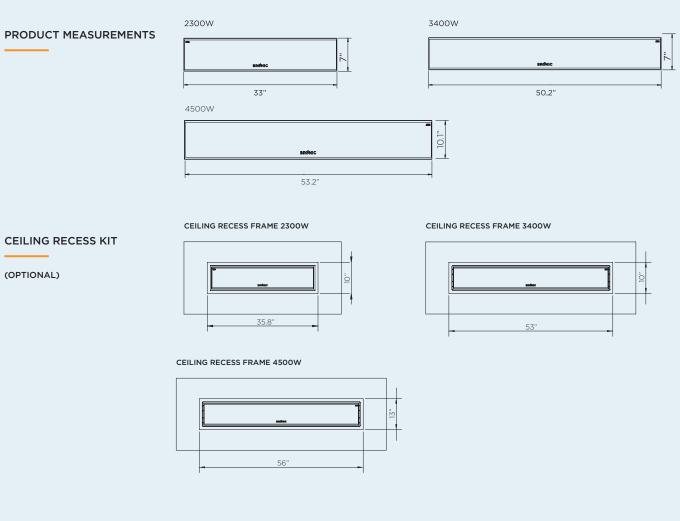



CEILING CAVITY GUIDE

MINIMUM CAVITY SIZE FOR 2300W, 3400W & 4500W MODELS

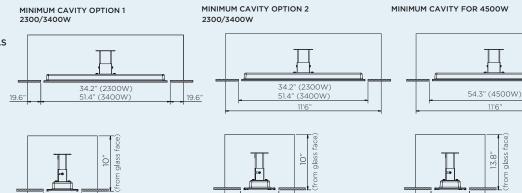

CEILING CUTOUT & CLEARANCE ZONES FOR 2300/3400/4500W

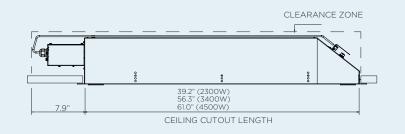




^{**} Available in 208V and 220-240V configurations.

CEILING & WALL MOUNT CLEARANCE

FRONT DOWN MOUNT ANGLE MOUNT CLEARANCE WALL MOUNT CLEARANCE 2300/3400W 18" (3400W) 18" (4500W) 10" (2300W) 18" (3500W) 18" (35

HEAT AREA

*HEAT AREA DEPENDENT ON AMBIENT TEMPERATURE AND WIND. OPTIMUM CONDITIONS EXPERIENCED AT APPROX 60°F AND IN A LOW WIND COVERED ENVIRONMENT.

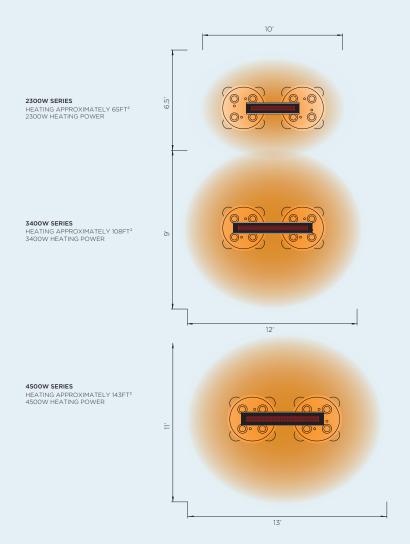



EXPLORE THE POSSIBILITIES

With the Bromic Smart-Heat[™] complimentary design service, designing a solution to optimize heating for your outdoor spaces is simple.



BROMIC.COM

ASIA PACIFIC | NORTH AMERICA | EUROPE