

ASSEMBLY INSTRUCTIONS

ITEM NO: BO-3025DK


Carefully place all parts on smooth surface to assembly.

1. TIGHTEN THE LAMP HOLDER RING (C) TO SECURE THE METAL SHADE (B) TO THE LAMP BODY (A).

2. INSTALL RECOMMENDED BULB (NOT INCLUDED IN THIS PACKING).

INSERT PLUG INTO AN OUTLET AND ENJOY YOUR LAMP!!

**Use Max 60W type A bulbs
(bulbs not included)**

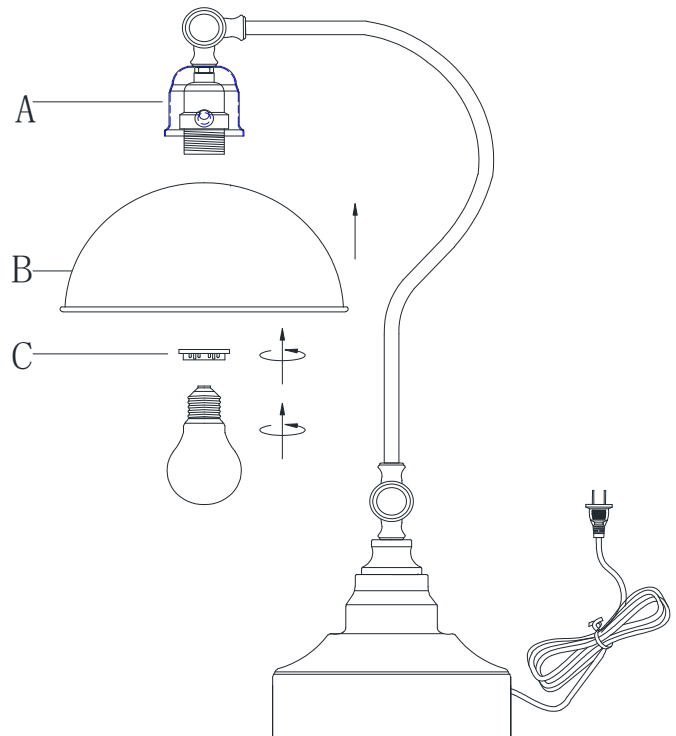

** TO REDUCE THE RISK OF ELECTRIC SHOCK, ALWAYS UNPLUG FROM THE ELECTRICAL OUTLET BEFORE INSTALLATION.*

** THIS FIXTURE IS SUITABLE FOR DRY LOCATION ONLY.*

** THIS FIXTURE SHOULD ONLY BE CLEANED WITH A SOFT LINT FREE CLOTH DAMPLED WITH WATER. DO NOT USE ANY CHEMICAL OR ABUSIVE CLEANER AS THEY MAY DAMAGE THE SURFACE OF THE PRODUCTS.*

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A SAFETY FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF IT DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT ST

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.