

ASSEMBLY INSTRUCTIONS

ITEM NO:FX-3008-6

IMPORTANT SAFETY INSTRUCTIONS:

These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.


DIRECT WIRE FIXTURES:WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

TO ASSEMBLE:

Shut off the main electrical supply at fuse box/circuit breaker.

Remove all parts from carton. Do not throw away any parts as shown.

1. Install the mounting bracket (A) to junction box with screws (B) .
3. Put the wire through the bracket (A).
4. Connect the ground wires “ $\perp$ ”to the supply wire “F”, Cathode wire ”N” in white to the supply wire, Anode wire”L” in black to the supply wire in the junction box.
5. Place the canopy (D) over the bracket (A) with screws (C). Tighten the screws and make sure fixings are secured.
6. Screw chain (E) clockwise into pole (G) to tighten.
7. Screw pole (G) clockwise into pole (H) to tighten.
8. Screw pole (H) clockwise into lamp body (I) to tighten.
9. Place shade (K) onto socket (J), Then screw socket ring (O) by plastic tool (P) clockwise to tighten.
10. Install proper bulbs (not provided) to the sockets referring to the marking and/or labels on the fixture for maximum wattage.
11. Turn on the power and enjoy!

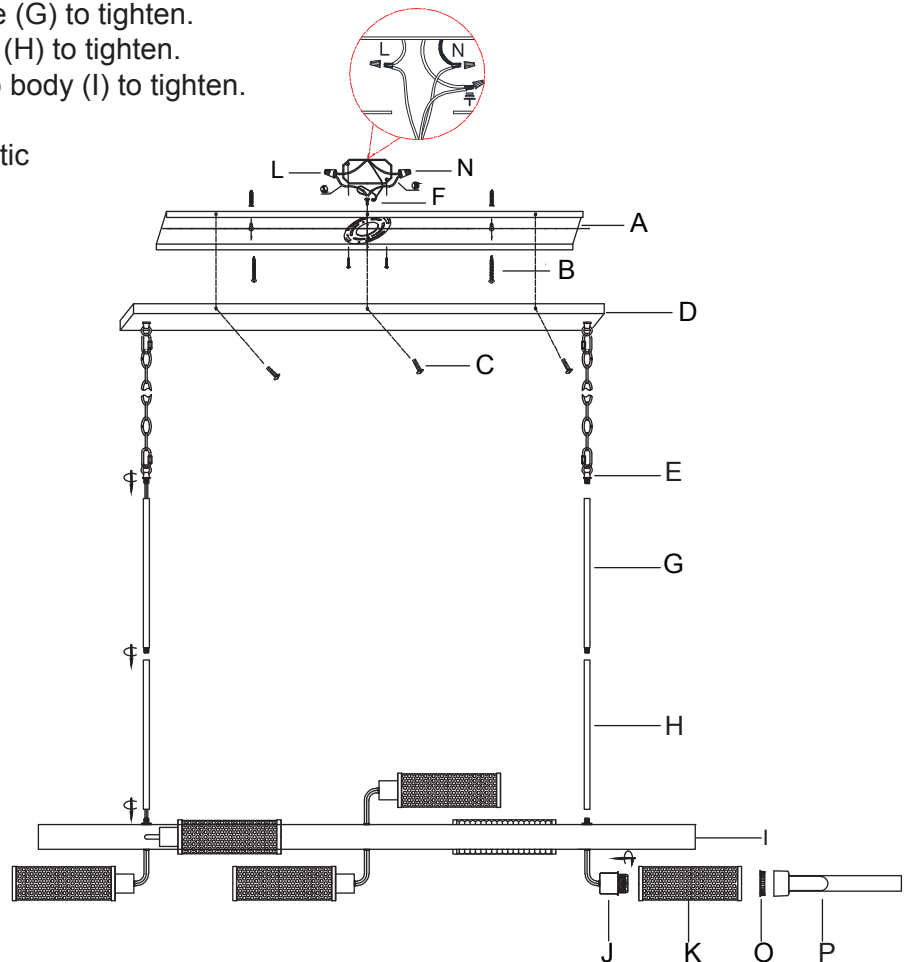

**USE MAX 6x60 WATTAGE TYPE T BULB
(NOT INCLUDED)**

To clean, wipe the fixture with a soft, dry cloth. Avoid the use of harsh or abrasive chemicals as they may damage the finish .

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.