

# ASSEMBLY INSTRUCTIONS

**ITEM NO: FX-3744-BL FX-3744-GRA FX-3744-PUR FX-3744-RED**

**\*\*\* THIS IS A DIRECT WIRED FIXTURE. WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.**

**\*\*\* TO REDUCE THE RISK OF ELECTRIC SHOCK, SHUT OFF THE MAIN ELECTRICAL SUPPLY AT FUSE BOX/CIRCUIT BREAKER.**


**\*\*\* THIS FIXTURE SHOULD ONLY BE CLEANED WITH A SOFT LINT FREE CLOTH DAMPLED WITH WATER. DO NOT USE ANY CHEMICAL OR ABUSIVE CLEANER AS THEY MAY DAMAGE THE SURFACE OF THE PRODUCTS.**

CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE.

1. SCREW POLE (1) ONTO THE LIGHTING BODY..
2. INSTALL RECOMMENDED BULB (NOT INCLUDED IN THIS PACKAGE) (2).
3. SCREW THREAD (3) TO THE CENTER OF THE SOCKETS ASSEMBLY. PUT THE WASHER (4), DIFFUSER (5), WASHER (6) TO THE THREAD (3) AND TIGHTENED WITH FINIAL (7).
- IF NECESSARY, ADJUST THE NUTS OF THREAD (3) TO FIT THE GLASS BETTER.
4. CONNECT THE GREEN GROUND WIRE "G" TO THE SUPPLY WIRE, CATHODE WIRE "N" IN WHITE TO THE SUPPLY WIRE, ANODE WIRE "L" IN BLACK TO THE SUPPLY WIRE IN THE JUNCTION BOX AS ILLUSTRATED WITH WIRE NUTS (8).
5. ATTACH THE MOUNTING PLATE (9) TO JUNCTION BOX AND TIGHTEN BY SCREWS (10).
6. ADJUST THE WIRE TO DESIRED LENGTH AND TUCK ADDITIONAL WIRE INSIDE THE CANOPY AND FIX IT WITH THE PLASTIC CLIP. ALIGN THE CANOPY TO THE MOUNTING PLATE AND TIGHTEN IT WITH SIDE SCREWS (11).

TURN ON POWER AND ENJOY YOUR LIGHT!!!

**Use 60 Watt x 4 Max type A  
BULB (Bulb not included)**

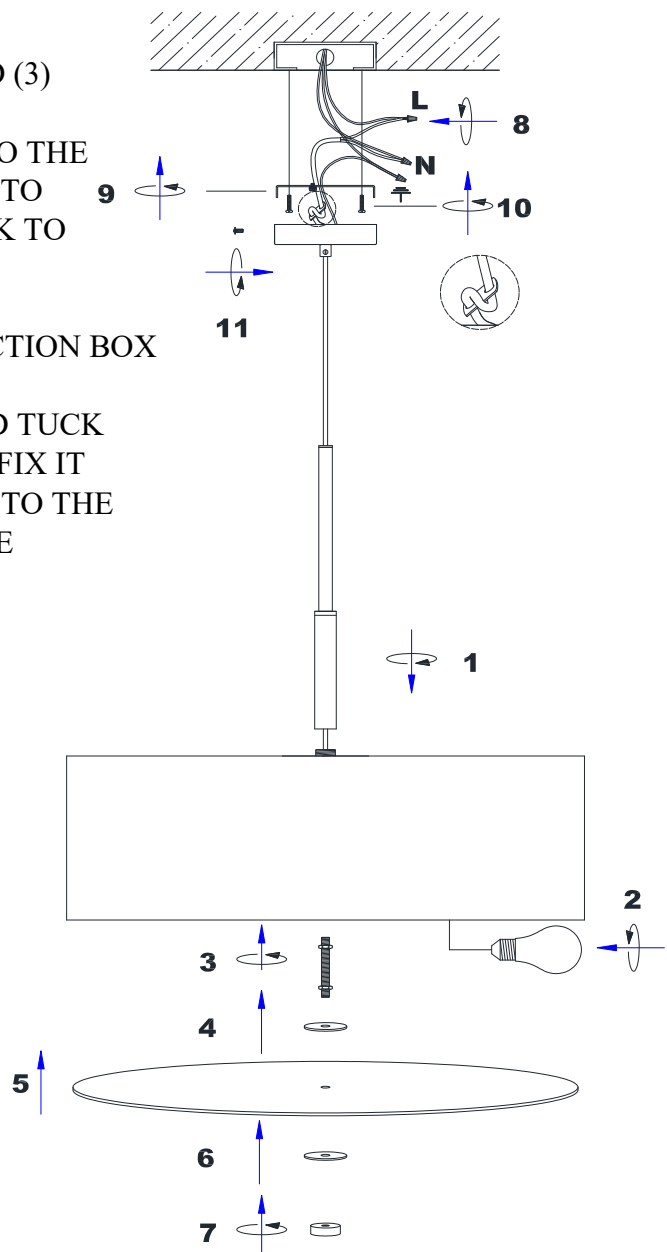

**SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.**