


LA-181M, LA181L CEILING LAMP


FIGURE 1

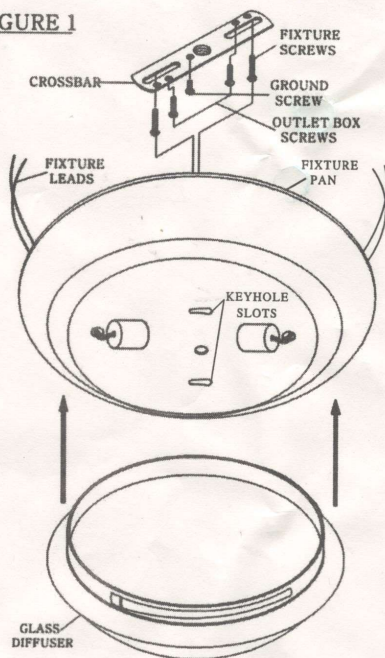

ASSEMBLY/INSTALLATION INSTRUCTIONS:

1. Before commencing the installation, carefully unpack and identify all parts (refer to FIGURE 1).
 2. Turn the electrical power to the installation point OFF.
 3. Using (2) OUTLET BOX SCREWS, securely fasten the CROSSBAR to the outlet box.
 4. Put (2) FIXTURE SCREWS into the CROSSBAR as shown. Make sure that the SCREWS line up with the KEYHOLE SLOTS in the FIXTURE PAN.
 5. Using the GROUND SCREW, fasten the HOUSE GROUND WIRE to the CROSSBAR.
 6. Lift the FIXTURE PAN into position and make the wiring connections: Using wire connectors, connect the HOUSE WHITE WIRE(S) to the FIXTURE WHITE (or RIBBED) LEAD(S); Connect the HOUSE BLACK (or RED) WIRE to the FIXTURE BLACK (or SMOOTH) LEAD(S). Make sure that there are no exposed wires or stands, and that the connections are secure.
 7. Fit the heads of the FIXTURE SCREWS through the KEYHOLE SLOTS in the FIXTURE PAN, rotate the PAN until the FIXTURE SCREW heads are seated at the small ends of the KEYHOLE SLOTS, and secure both FIXTURE SCREWS.
 8. Install the bulb(s). (Bulb not included).
- NOTE:** Bulb types and quantities per fixture depend on the style you purchased. Please see the labels which stick beside the socket for bulb types and maximum wattages before installation.
9. Lock the GLASS DIFFUSER: Carefully fit the bayonet lock-on GLASS DIFFUSER into the FIXTURE PAN. Turn the GLASS DIFFUSER clockwise until the GLASS DIFFUSER stops rotating and locks into the FIXTURE PAN (Refer to FIGURE 2) (NOTE: It may be necessary to secure the FIXTURE PAN in place while locking or unlocking the GLASS DIFFUSER)
 10. Restore electrical power to circuit.

FIGURE 2

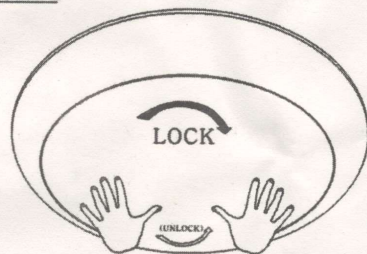

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN.**

